

1895 6

Ultrasonic cleaning tank, 6 l

CE

With special degas function

Features:

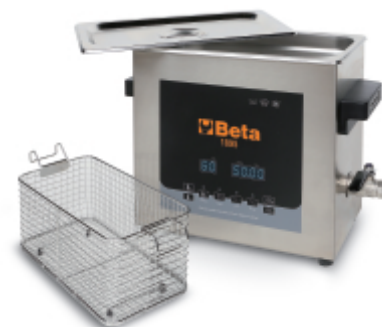
- Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (injectors, carburetors, valves etc.)
- Digital display for temperature and cleaning time selection
- Two cleaning modes: "soft" and "normal"
- For normal cleaning, just use water at a temperature of 50/60 °C
- For more accurate cleaning, add non-foaming detergent specific for ultrasonic tanks
- Using the degas mode speeds up air release throughout the tank, thereby improving ultrasonic cleaning efficiency



Technical Data

- Tank capacity: 6 l
- Drain tap
- Power: 150 W
- Heating power: 300 W
- Temperature range: 0+80 °C
- Cleaning time range: 0-99 minutes
- Frequency: 40 kHz
- Power supply: 220/230V
- Overall dimensions: 330x180x310 mm
- Tank dimensions: 300x155x150 mm
- Basket dimensions: 250x105x100 mm
- Maximum capacity: 5.5 kg

Maximum capacity: 6 l

Ideal for injectors and EGR valves



 art.	art.	 Max	
018950060	1895 6	5,5	8,1