



**PROMOTION VALID UNTIL 28/02/2026**

**2025**




# Beta

RSC50 2.0



**Configure  
your workshop  
in 3D online**

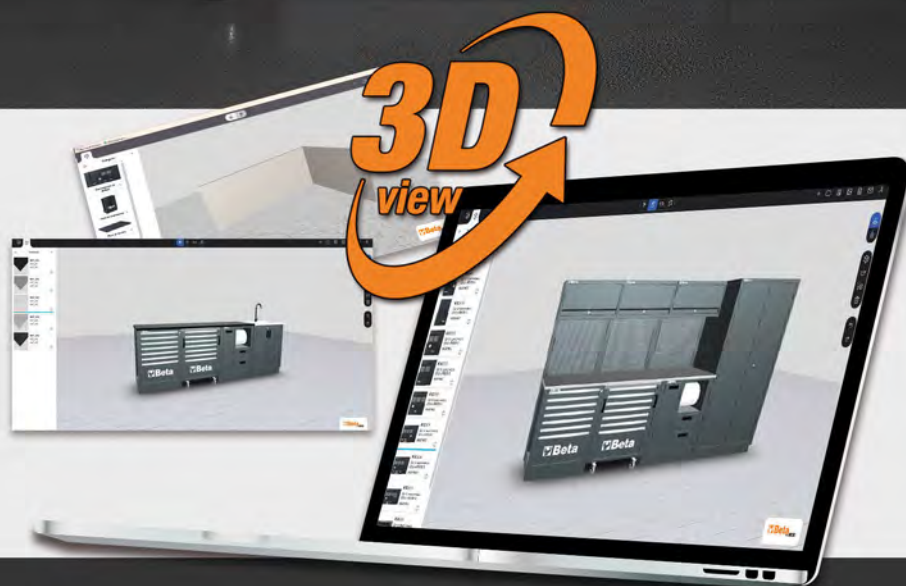



## WORKSHOP EQUIPMENT

2÷5



## CONTAINERS

6÷11



## ASSORTMENT AND THERMOFORMED TRAYS

12÷15



## WORKBENCHES

16÷18



## PALLET TRUCKS, TROLLEYS AND BASKETS

19÷21



## TOOL BAGS

22÷24



## WRENCHES

25÷29



## SCREWDRIVERS

30-31



## SOCKETS

32÷35



## TORQUE WRENCHES

36÷38



## PLIERS

39÷40



## DRILLING AND THREADING TOOLS

41



## MEASURING TOOLS

42



## HAMMERS AND CHISELS

43



## EXTRACTORS

44



## PLUMBING TOOLS

45



## LIGHTING

46÷50



## GENERAL MAINTENANCE

51; 55



## BM - ELECTRICAL TOOLS

52



## CUTTING TOOLS

53-54



## REELS

56-57



## POWER TOOLS

58-59



## STAINLESS STEEL

60



## INSULATED TOOLS

61-62



## BATTERY CHARGERS

63÷68



## AUTOMOTIVE

69÷87



## ROBUR

88



## PNEUMATIC TOOLS

89÷94



## SAFETY FOOTWEAR

95÷103



## WORKWEAR

104÷111



## BETA COLLECTION

112




Blister pack support




# RSC50 2.0

**NEW!**



**100%  
MADE  
By  
Beta**

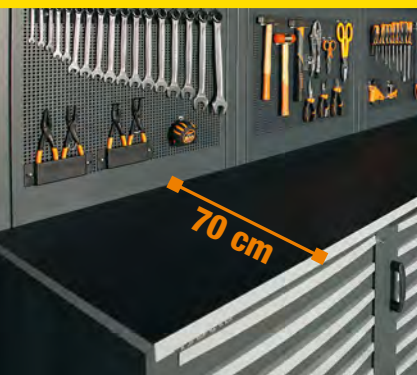

The workshop equipment combination, RSC50, has been upgraded into the new, **revolutionary RSC50 2.0**, with a **NEW 70-CM-DEEP WORKTOP**, for a large, convenient, functional work surface. It can be fitted with a vice, thereby allowing heavy-duty jobs to be carried out.

## COMBINATION RSC50 2.0 D

**RSC50 2.0 D/224UT**

050001090 276 kg

**Workshop equipment combination RSC50 2.0 with 224 tools**



Combination comprising the following:

- 1 worktop, 1,495x**700 mm** (RSC50 2.0 NPG/2-1.5MT)
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 fixed two-door module (RSC50 2.0 MA)
- 2 wall-mounted cabinets (RSC50 2.0 PM)
- 2 upper perforated tool panels (RSC50 2.0 PFS)
- 2 lower perforated tool panels (RSC50 2.0 PFI)
- 2 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 single-door tool cabinet (RSC50 2.0 A1)

**+ Included in the price assortment of 224 TOOLS Beta**



M391

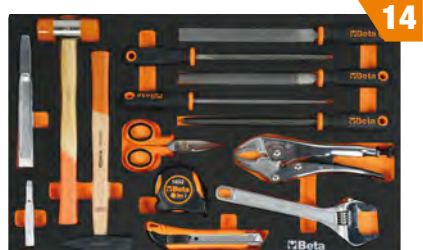

M392



M394



M395

**14"**  
**12"**





# GET A NEW LOOK!

RENOVATE YOUR WORKSHOP  
PURCHASE THE RSC50 2.0 D  
OR RSC50 2.0 F COMBINATION

...**Beta** WILL TAKE CARE OF THE TOOLS!

## COMBINATION RSC50 2.0 F

**RSC50 2.0 F/411UT**

050001095 411 kg





Included in the price  
assortment of **411**  
**TOOLS** **Beta**

### Workshop equipment combination RSC50 2.0 with 411 tools

Combination comprising the following:

- 1 worktop, 2,240x700 mm (RSC50 2.0 NPG/3-2.2MT)
- 1 fixed module with 7 drawers (RSC50 2.0 M7)
- 1 mobile roller cab with 7 drawers (RSC50 2.0 C7)
- 1 fixed service module with 2 drawers (RSC50 2.0 MS-2C)
- 3 wall-mounted cabinets (RSC50 2.0 PM)
- 3 upper perforated tool panels (RSC50 2.0 PFS)
- 3 lower perforated tool panels (RSC50 2.0 PFI)
- 3 pairs of right/left uprights (RSC50 2.0 P/2MDX-SX)
- 1 two-door tool cabinet (RSC50 2.0 A2)

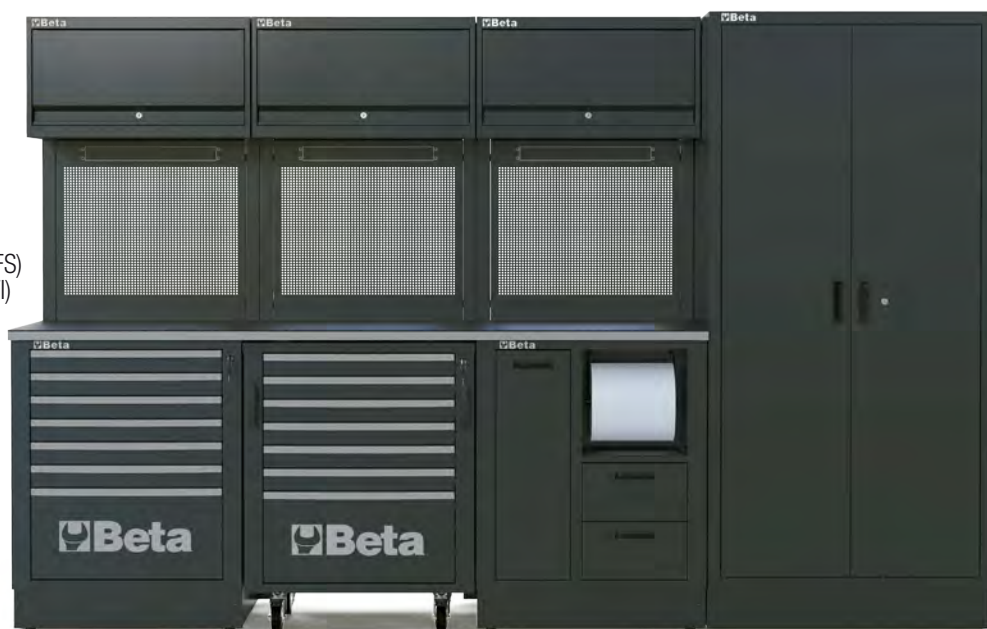

M25



M105



M169



M229



M238



M320

The only soft foam  
tray with the new  
**IMPACT  
DRILL 20V**  
supplied with  
accessories and  
**2 batteries 4Ah**

14"  
38"  
12"



# C45PRO 2.0


**NEW!**



## C45PRO 2.0 D

### Workshop equipment combination C45PRO 2.0 comprising:

- 1 fixed module with 7 drawers (C45PRO 2.0 M7)
- 1 mobile roller cab with 7 drawers (C45PRO 2.0 C7)
- 1 fixed service module (C45PRO 2.0 MS)
- 1 fixed module with 5 drawers (C45PRO 2.0 M5)
- 1 fixed two-door module (C45PRO 2.0 MA)
- 5 perforated tool panels (C45PRO 2.0 PF)
- 5 wall-mounted cupboards (C45PRO 2.0 PM)
- 7 wall brackets, wide type (C45PRO 2.0 SL)
- 2 wall brackets, narrow type (C45PRO 2.0 SS)
- 2 single-door cabinets (C45PRO 2.0 AS1)



## C45PRO 2.0 DX

045002031 640 kg

- 1 stainless steel coated MDF worktop, dimensions 2,040x615 mm (C45PRO 2.0 PXE/3-2.0MT)
- 1 stainless steel coated MDF worktop, dimensions 1,360x615 mm (C45PRO 2.0 PXE/2-1.3MT)
- 1 self-supporting complete corner with stainless steel coated MDF worktop (C45PRO 2.0 CORNER/X)



## C45PRO 2.0 DW

045002032 606 kg


- 1 multi-ply wood worktop, dimensions 2,040x615 mm (C45PRO 2.0 PWE/3-2.0MT)
- 1 multi-ply wood worktop, dimensions 1,360x615 mm (C45PRO 2.0 PWE/2-1.3MT)
- 1 self-supporting complete corner with multi-ply wood worktop (C45PRO 2.0 CORNER/W)



## C45PRO 2.0 A

### Workshop equipment combination C45PRO 2.0


- Fixed service module (C45PRO 2.0 MS)
- Fixed module with 7 drawers (C45PRO 2.0 M7)
- Fixed two-door module (C45PRO 2.0 MA)
- 3 wall-mounted cabinets (C45PRO 2.0 PM)
- 3 perforated tool panels (C45PRO 2.0 PF)
- 2 wall brackets, narrow type (C45PRO 2.0 SS)
- 2 wall brackets, wide type (C45PRO 2.0 SL)



## C45PRO 2.0 AX

045002003 234,5 kg

- Stainless steel coated MDF worktop, dimensions 2,040x615 mm (C45PRO 2.0 PXE/3-2.0MT)



## C45PRO 2.0 AW

045002004 219 kg

- Multi-ply wood worktop, dimensions 2,040x615 mm (C45PRO 2.0 PWE/3-2.0MT)





**NEW!**

The workshop equipment system, C45PRO 2.0, has been upgraded into the C45PRO 2.0 system, an even more convenient one, **BASED ON THE NEW 61.5-CM DEEP WORKTOP** to answer the most demanding professionals' requirements.




## CONVENIENT AND PROFESSIONAL

### C45PRO 2.0

#### Workshop equipment combination C45PRO 2.0

- Fixed module with 7 drawers (C45PRO 2.0 M7)
- Mobile roller cab with 7 drawers (C45PRO 2.0 C7)
- Fixed service module (C45PRO 2.0 MS)
- 3 perforated tool panels (C45PRO 2.0 PF)
- 3 wall-mounted cabinets (C45PRO 2.0 PM)
- 3 wall brackets, wide type (C45PRO 2.0 SL)
- 1 wall bracket, narrow type (C45PRO 2.0 SS)
- Two-door cabinet (C45PRO 2.0 AS2)



### C45PRO 2.0 X

045002001

334 kg



- Stainless steel coated MDF worktop, dimensions 2,040x**615** mm (C45PRO 2.0 PXE/3-2.0MT)

### C45PRO 2.0 W

045002002

318 kg




- Multi-ply wood worktop, dimensions 2.040x**615** mm (C45PRO 2.0 PWE/3-2,0MT)

### C45PRO 2.0 B

#### Workshop equipment combination C45PRO 2.0

- Fixed module with 5 drawers (C45PRO 2.0 M5)
- Fixed two-door module (C45PRO 2.0 MA)
- 2 wall-mounted cabinets (C45PRO 2.0 PM)
- 2 perforated tool panels (C45PRO 2.0 PF)
- 2 wall brackets, wide type (C45PRO 2.0 SL)
- 1 wall bracket, narrow type (C45PRO 2.0 SS)
- Single-door cabinet (C45PRO 2.0 AS1)



### C45PRO 2.0 BX

045002021

206 kg



- Stainless steel coated MDF worktop, dimensions 1,360x**615** mm (C45PRO 2.0 PXE/2-1.3MT)

### C45PRO 2.0 BW

045002022

196 kg



- Multi-ply wood worktop, dimensions 1,360x**615** mm (C45PRO 2.0 PWE/2-1.3MT)





# DISCOVER THE RSC RANGE!

## THE EVOLUTION OF PERFECTION!



The **RSC range** has been designed to satisfy all professionals' requirements and ensure reliability as well as high operation performance. The innovative design, inspired by the racing world, provides these mobile roller cabs and trolleys with a captivating, unique style: the 7 colours and its finish make the RSC range synonymous with one-of-a-kind products in the market. The sturdy frameworks and the materials result in high quality and remarkable durability, thereby effectively supporting the daily work of industrial production departments, mechanics, car body repairers and general maintenance service providers. What is more, most RSC roller cabs are TÜV certified. This prestigious certification - which is the name for safety and guaranteed quality - is obtained upon successful completion of severe tests under the EK5/TA5 protocol.



### RSC24

#### Mobile Roller cab


- ABS reinforced worktop
- Multi-purpose top with anti-fall edges and eight holes for accommodating screwdrivers
- Drawer bases protected by foamed rubber mats
- 4 castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays
- Front centralized safety lock
- Static load capacity: 800 kg
- Built-in bottle holder (can be applied on both sides).

#### The following accessories can be added:

- Wood worktop 2400 RSC24/PL
- Perforated tool panel 2400 RSC24/PF
- Folding shelf 2400 RSC24/MP
- Document holder 2400 RSC24/PD
- Paper roll holder 2400 RSC24/PC
- Computer wall bracket 2400 RSC24/SPC



ACCESSORIES AND  
TOOLS NOT INCLUDED




	Ral 2011	Ral 2011 Ral 7016	Ral 9006 Ral 7016	Ral 3000 Ral 7016	Ral 5015 Ral 7016	Ral 7016	Ral 9005	kg
<b>RSC24/5</b>	024004050	024004051	024004052	024004053	024004056	024004057	024004059	60
<b>RSC24/6</b>	024004060	024004061	024004062	024004063	024004066	024004067	024004069	62
<b>RSC24/7</b>	024004070	024004071	024004072	024004073	024004076	024004077	024004079	63
<b>RSC24/8</b>	024004080	024004081	024004082	024004083	024004086	024004087	024004089	66

RSC24/5		
n°		Max
2	70 mm	25 kg
2	140 mm	30 kg
1	280 mm	35 kg

RSC24/6		
n°		Max
4	70 mm	25 kg
1	140 mm	30 kg
1	280 mm	35 kg

RSC24/7		
n°		Max
5	70 mm	25 kg
1	140 mm	30 kg
1	210 mm	30 kg

RSC24/8		
n°		Max
6	70 mm	25 kg
2	140 mm	30 kg





THE MOST COMPLETE  **Beta**  
ASSORTMENT EVER

# AND THE ROLLER CAB RSC24 IS INCLUDED IN THE PRICE!

## 2400 RSC24/7-VIS

024004037

Assortment of **224** tools for INDUSTRIAL MAINTENANCE **14" 12"**



M391



M392

Medium version



M394



M395



**INCLUDED:**  
**Mobile  
roller cab with  
RSC24/7-F0**

- 7 removable drawers (588x367 mm),  
with ball bearing slides
- 5 drawers, 70 mm high
  - 1 drawer, 140 mm high
  - 1 drawer, 210 mm high

Promotion valid only with RSC24 FULL ORANGE

## 2400 RSC24A/8-VIL

024004008

Assortment of **411** tools for INDUSTRIAL MAINTENANCE **14" 38" 12"**



M25



M105

Extra large version



M169



M229

**THE MOST COMPLETE  
BETA ASSORTMENT EVER**



M238



M320

The only soft foam tray with the new  
**IMPACT DRILL 20V** supplied with  
accessories and **2 batteries 4Ah**



**INCLUDED:**  
**Mobile  
roller cab with  
anti-tilt system  
RSC24A/8-0**

- 8 removable drawers  
(588x367 mm), with  
ball bearing slides
- 6 drawers, 70 mm high
  - 2 drawers, 140 mm high

Promotion valid only with RSC24 ORANGE

## RSC24AXLP/7


105 Kg

**Mobile roller cab with 7 drawers, with wood worktop and ANTI-TILT SYSTEM, long model**



- Long model with 7 fully removable drawers (882x367 mm), with ball bearing slides
- Multi-ply wood worktop with holes for a vice 1599F/100 or 1599GI/100 (to be ordered separately)
- Sturdy nylon front, with built-in label holder
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Built-in side bottle holder (can be applied on both sides)
- Built-in paper roll holder
- Each drawer can accommodate up to **6 EVA foam or ABS thermoformed trays**



Ral 2011	Ral 3000	Ral 7016
Ral 7016	Ral 7016	Ral 7016
024004571	024004573	024004577



n°		Max
5	70 mm	30 kg
1	140 mm	35 kg
1	210 mm	35 kg

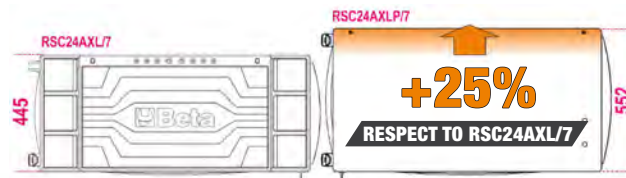

**ACCESSORIES AND TOOLS NOT INCLUDED**



## RSC24L-CAB

82 Kg



**Mobile roller cab with 7 drawers and tool cabinet**

- 7 drawers (588x367 mm) with ball bearing slides:
  - 5 drawers, 70 mm high
  - 1 drawer, 140 mm high
  - 1 drawer, 210 mm high.
- Drawer bases protected by foamed rubber mats.
- 4 castors, Ø 125 mm: 2 fixed and 2 steering with brakes.
- Front centralized lock.
- **Side tool cabinet with lockable door and vertically adjustable interior shelf.**
- Static load capacity: 1.100 kg.
- Multi-ply wood worktop with holes for a vice (1599F/100, to be ordered separately).
- Built-in paper roll holder.
- Double rear bottle holder.
- Built-in side bottle holder



Ral 2011	Ral 3000	Ral 7016
Ral 7016	Ral 7016	Ral 7016
024004471	024004473	024004477

n°		Max
5	70 mm	25 kg
1	140 mm	30 kg
1	210 mm	30 kg







## RSC24AXL

### Mobile roller cab, WITH ANTI-TILT SYSTEM, long model

- New ABS reinforced worktop with anti-fall edges, eight holes for accommodating screwdrivers and 6 tote trays
- Sturdy nylon front, with built-in label holder.
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Built-in side bottle holder (can be applied on both sides)
- Each drawer can accommodate up to 6 EVA foam or ABS thermoformed trays

#### Following accessories can be added:

- Wood worktop 2400 RSC24/PL
- Document holder 2400 RSC24/PD-A
- Paper roll holder 2400 RSC24/PC-A



	Ral 2011 Ral 7016	Ral 3000 Ral 7016	Ral 7016	n°	max	kg	
<b>RSC24AXL/7</b>	024004271	024004273	024004277	5	70 mm	30 kg	
				1	140 mm	35 kg	<b>84</b>
				1	210 mm	35 kg	
<b>RSC24AXL/8</b>	024004281	024004283	024004287	6	70 mm	30 kg	
				2	140 mm	35 kg	<b>88</b>
<b>RSC24AXL/9</b>	024004291	024004293	024004297	8	70 mm	30 kg	
				1	140 mm	35 kg	<b>90</b>


## RSC24AXXL

131 kg

**NEW!**

### Mobile roller cab with 8 drawers and anti-tilt system, long model

- 1 fully removable drawer (1,176x367 mm), with ball bearing slides
- 7 fully removable drawers (882x367 mm), with ball bearing slides:
  - 6 drawers 70 mm high
  - 1 drawer 140 mm high
- Worktop made from stainless steel coated MDF, with holes for vice item 1599F/125 or 1599GI/125 (to be ordered separately) and 6 tote trays
- Sturdy nylon fronts, with built-in label holders
- Drawer bases protected by foamed rubber mats
- Removable side compartment, with ball bearing slides, with shelf and lock
- 4 castors, Ø 150 mm: 2 fixed and 2 steering with brakes
- 3 safety locks
- Built-in paper roll holder
- Built-in bottle holder
- Static load capacity: 1,100 kg
- Following trays can be added:
  - up to 8 EVA foam or ABS thermoformed trays in drawer 1,176x367 mm
  - up to 6 EVA foam or ABS thermoformed trays in drawer 882x367 mm



Ral 2011	Ral 3000	Ral 7016
Ral 7016	Ral 7016	Ral 7016
024004781	024004783	024004787

n°		Max
1	70 mm (1.176x367 mm)	40 kg
6	70 mm (882x367 mm)	30 kg
1	140 mm (882x367 mm)	35 kg



## RSC28


130 Kg

### SuperTank trolley with wood worktop and 10 drawers

- 10 drawers (588x367 mm) with ball bearing slides
- Quick, safe system for opening and closing drawers, with nylon and fibreglass front
- **5 side drawers:**  
4 drawers, 70 mm high  
1 drawer, 210 mm high
- **5 front drawers:**  
4 drawers, 70 mm high  
1 drawer, 210 mm high
- Drawer bases protected by foamed rubber mats.
- 4 high-capacity castors, Ø 150 mm: 2 fixed and 2 steering with brakes
- 2 centralized safety locks
- 3 front tool drawers
- Multi-ply wood worktop with holes for a vice (1599F/150 - 1599GI/150, to be ordered separately)
- Built-in tool compartment



Ral 2011	Ral 3000	Ral 7016
Ral 7016	Ral 7016	Ral 7016
028003001	028003003	028003007



n°		Max
8	70 mm	25 kg
2	210 mm	30 kg



- Side compartment with foldaway door with lock
- Built-in bottle holders
- 135-mm-high storage compartment with plastic-covered base




## C30M

030000300

200 kg

### MaxiTank mobile workbench

- 5 front drawers with ball bearing slides:  
3 drawers (367x610 mm), 90 mm high  
1 drawer (588x610 mm), 90 mm high  
1 drawer (588x610 mm), 180 mm high.
- Quick opening system with aluminium front.
- Drawer bases protected by foamed rubber mats.
- Can be fitted with thermoformed trays.
- One hydraulic jack, designed to lift front part effortlessly, thus allowing easy transportation.
- 4 high-capacity castors: 2 steering, front, Ø 150 mm<sup>2</sup> fixed, rear, Ø 170 mm.
- Oil-proof, rubber-coated worktop, 1300x800 mm, with drain hole for fluid collection in a small tank.
- Storage compartment, 720x250x1300 mm, with PVC-coated worktop and front sliding panels.
- Centralized lock for drawers and panels.
- 3 built-in side bottle holders.
- Built-in paper roll holder
- Static load capacity: 1.800 kg.
- Can accommodate a multi-ply wood worktop (3000M/PLM), to be ordered separately
- Can accommodate vice 1599F/150 or 1599GI/150 (to be ordered separately).



h	max
90 mm	30 kg
180 mm	35 kg





# MOBILE ROLLER CAB + ASSORTIMENT 181 TOOLS Beta

**3900 07/5M**

039000371 71 Kg

## Mobile roller cab C39 with 7 drawers



- Sturdy multi-purpose worktop with tote-trays and holes for accommodating screwdrivers
- Pull-out drawer with opening system throughout its length



**3700 07/5M**

037000371 61 Kg

## Mobile roller cab C37 with 7 drawers



- Sturdy multi-purpose worktop
- Quick release system made of aluminium, opening throughout length of drawer
- **Corner bumpers** throughout height of roller cab, to avoid damaging vehicles in garage



**+181 TOOLS**  


UPRIGHTS AND DRAWER FRONT MADE OF ALUMINIUM ALLOY  
**+ STURDINESS + LIGHTWEIGHTNES**

**M01**

4,5 Kg



22



42 6-7-8-9-10-11-12-13-14  
15-16-17-18-19-20-21-22  
24-27-30-32-36 mm

**M60**

1,9 Kg



23



○ 96T 2-2,5-3-4-5-6-7-8-10 mm  
○ 97BTX/SC8 T9-T10-T15-T20  
T25-T27-T30-T40  
○ 944BX 5-6-7-8-10-13 mm

**M213**

1,8 Kg




25



- 1201E 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
- 1201EN 4x30 mm
- 1202E PH0x60-PH1x80-PH2x100-PH3x150 mm
- 1202EN PH1x30 mm
- 1207E/TX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45
- 1253 3,5x100 mm

**M129**

3,4 Kg



13



- 1032 180 mm
- 1034 170 mm
- 1036 175 mm
- 1038 175 mm
- 1048N 250 mm
- 1052 240 mm
- 1082BM 160 mm
- 1098 220 mm
- 1112 250 mm
- 1128BM
- 1150BM 180 mm
- 1166BM 160 mm
- 1168BM 160 mm

**M100**

6,7 Kg



98

- 895/1 - 895/3 - 895/6
- 900 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
- 900L 5-6-7-8-9-10-11-12-13 mm
- 900ME 3-4-5-6-7 mm
- 900LP 0,8x4-1x5,5-1,2x6,5-1,2x8 mm
- 900PH PH1-PH2-PH3-PH4
- 900TX T10-T15-T20-T25-T27-T30-T40

- 900/20 50 mm - 900/20L 100 mm
- 900/21 150 mm
- 900/25
- 900BG/30
- 900/42
- 900/55
- 920A 8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-28-30-32 mm

- 920/15 - 920/25
- 920AN/125 125 mm
- 920AN/250 250 mm
- 920/42
- 920/55
- 920FTX 10-12-14-16-18-20-22-24 mm
- 920AL 10-12-13-14-15-16-17-18-19-21-22 mm



14"

12"

**5988VU/M**

059880356

30 Kg

SOFT  
MODULE  
SYSTEM

1/4" 12"

**Assortment of 214 tools in soft foam tray**

Recommended with: RSC24 - RSC24A - RSC24AXL - RSC24AXLP/7 - RSC24AXXL - C37 - C39 - C39SM - C39MD - C58BC - RSC28 - C59 - RSC55 - RSC50 2.0

**Quantity/Description****Beta N. TR**

22	combination wrenches 6-7-8-9-10-11-12-13-14-15-16-17	42	M01
18-19-20-21-22-24-27-30-32-36	mm		
11	double open end wrenches 6x7-8x9-10x11-12x13-14x15	55	M30
16x17-18x19-20x22-21x23-24x27-30x32	mm		
11	double ended offset ring wrenches 6x7-8x9-10x11-12x13-14x15-	90	M30
16x17-18x19-20x22-21x23-24x27-30x32	mm		
9	ball head offset hexagon key wrenches $\odot$ 1,5+10 mm	96BPC/SC9	M30
1	socket holder	895/1	M100
1	socket holder	895/3	M100
1	socket holder	895/6	M100
13	1/4" hexagon sockets $\odot$ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm	900	M100
9	hexagon hand sockets, long series $\odot$ 5-6-7-8-9-10-11-12-13 mm	900L	M100
5	1/4" socket drivers for hexagon screws $\odot$ 3-4-5-6-7 mm	900ME	M100
4	socket drivers for slotted head screws $\bullet$ 0,8x4-1x5,5-1,2x8 mm	900LP	M100
4	socket drivers for cross head Phillips® screws $\bullet$ PH1-PH2-PH3-PH4	900PH	M100
7	socket drivers for Torx® head screws $\odot$ T10-T15-T20-T25-T27-T30-T40	900TX	M100
1	1/4" drive extension bar 50 mm	900/20	M100
1	1/4" drive extension bar 100 mm	900/20L	M100
1	1/4" drive extension bar 150 mm	900/21	M100
1	1/4" drive universal joint	900/25	M100
1	1/4" drive spinner handle	900BG/30	M100
1	1/4" drive swivel T-handle	900/42	M100
1	1/4" reversible ratchet $\oplus$	900/55	M100
21	1/2" square drive hexagon sockets $\odot$ 8-10-11-12-13-14-15-16-17-18-	920A	M100
19-20-21-22-23-24-26-27-28-30-32	mm		
1	adaptor, 1/2" female and 3/8" male drives 125 mm	920/15	M100
1	1/2" drive universal joint 250 mm	920/25	M100
1	1/2" wobble extension bar 125 mm	920AN/125	M100
1	1/2" wobble extension bar 250 mm	920AN/250	M100
1	1/2" drive sliding T-handle 305 mm	920/42	M100
1	1/2" drive reversible ratchet $\oplus$	920/55	M100
8	1/2" sockets for Torx® head screws $\odot$ 10-12-14-16-18-20-22-24 mm	920FTX	M100
11	hexagon hand sockets $\odot$ 10-12-13-14-15-16-17-18-19-21-22 mm	920AL	M100
1	circclip pliers straight, internal $\odot$ 180 mm	1032	M129
1	circclip pliers bent, internal $\odot$ 170 mm	1034	M129
1	circclip pliers straight, external $\bullet$ 175 mm	1036	M129
1	circclip pliers bent, external $\bullet$ 175 mm	1038	M129
1	slip joint pliers 250 mm	1048N	M129
1	self - locking pliers 240 mm	1052	M129
1	Diagonal cutting nippers $\ddagger$ 160 mm	1082BM	M129
1	construction worker's pincers 220 mm	1098	M129
1	tin snips 250 mm	1112	M129
1	electrician's scissors, straight blades	1128BM	M129
1	half-round needle nose pliers $\equiv$ 180 mm	1150BM	M129
1	Extra-long needle nose pliers $\bullet$ 160 mm	1166BM	M129
1	Extra-long bent needle nose pliers $\bullet$ 160 mm	1168BM	M129
6	screwdriver for slotted head screws $\bullet$ 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm	1201E	M213
1	screwdriver for slotted head screws, extra-short series $\bullet$ 4x30 mm	1201EN	M213
4	screwdriver for cross head Phillips® screws $\bullet$ PH0,60-PH1x80-PH2x100-PH3x150 mm	1202E	M213

**M01****M30****M25****M230****M129****M100**

1	screwdriver for cross head Phillips® screws, extra-short series $\bullet$ PH1x30 mm	1202EN	M213
12	screwdrivers for Torx® head screws, with handles $\odot$ T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45"	1207E/TX	M213
1	main testing screwdriver $\bullet$	1253	M213
3	drift punches 2-3-4 mm	30	M230
6	pin punches 2-3-4-5-6-8	31	M230
1	centre punch $\varnothing$ 4 mm	32	M230
1	flat chisels 150 mm	34	M230
2	flat chisels, ribbed type 200-250 mm	35	M230
1	cape chisels, standard type 125 mm	36	M230
1	engineer's hammer 500 g	1370	M230
1	soft face hammer $\varnothing$ 35 mm	1390	M230
1	measuring tape 3 m	1692	M230
1	telescopic magnet with flexible head	1712TF	M230
1	second-cut square files 200 mm	1719BMA...Q	M230
1	second-cut triangular files 200 mm	1719BMA...T	M230
1	second-cut flat files 200 mm	1719BMA...P	M230
1	second-cut half-round files 200 mm	1719BMA...M	M230
1	second-cut round files 200 mm	1719BMA...R	M230
1	steel wire brush	1737NX	M230
1	snap - off blade utility knife 18 mm	1771	M230

**5904VU/1M**

059041201

12 Kg

SOFT  
MODULE  
SYSTEM

12"

**Assortment of 90 tools in soft foam tray**

Recommended with: RSC23T - RSC24 - RSC24A - RSC24AXL - RSC24AXLP/7 - RSC24AXXL - RSC24L/7 - RSC24L-CAB - RSC28 - C37 - C39 - C39T - C39SM - C39MD - RSC51 - RSC55 - RSC50 2.0 - C59 - C58BC

**Quantity/Description****Beta N. TR**

16	combination wrenches 6+21 mm	42	M05
8	double open end wrenches 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22 mm	55	M33
9	offset hexagon key wrenches $\odot$ 1,5-2-2,5-3-4-5-6-8-10 mm	96/SC9	M33
6	drivers for Torx® head screws $\odot$ T8-T10-T15-T20-T25-T30	1267TX	M204
3	screwdrivers for slotted head screws $\bullet$ 3x75-4x100-6,5x150 mm	1260	M201
3	screwdrivers for cross head Phillips® screws $\bullet$ PH0x60-PH1x80-PH2x100 mm	1262	M201
8	offset hexagon key wrenches $\odot$ 2-2,5-3-4-5-6-7-8 mm	96T	M50
1	1/2" wobble extension bar 125 mm	920AN/125	M83
1	1/2" wobble extension bar 250 mm	920AN/250	M83
1	1/2" drive universal joint	920/25	M83
1	1/2" drive sliding T-handle	920/42	M83
1	1/2" drive reversible ratchet $\oplus$	920/55	M83
19	1/2" square drive hexagon sockets $\odot$ 10+24-26-27-30-32 mm	920A	M83
1	Heavy-duty diagonal cutting nippers $\ddagger$ 160 mm	1084	M137
1	combination pliers bright chrome-plated $\equiv$ 180 mm	1150	M137
1	Extra-long needle nose pliers $\bullet$ 160 mm	1166	M137
1	slip joint pliers, slip-proof PVC coated handles 250 mm	1048N	M153
1	self - locking pliers 240 mm	1052	M153
2	flat chisels, ribbed type 100 - 200 mm	35	M234
1	engineer's hammer 300 g	1370	M234
1	soft face hammer $\varnothing$ 35 mm	1390	M234
1	circclip pliers straight, internal $\odot$ 180 mm	1032	M145
1	circclip pliers bent, internal $\odot$ 170 mm	1034	M145
1	circclip pliers straight, external $\bullet$ 175 mm	1036	M145
1	circclip pliers bent, external $\bullet$ 175 mm	1038	M145

**M05****M33****M204****M201****M50****M83****M137****M153****M234****M145**

**NEW  
ONLINE  
CONFIGURATOR**

Create your own roller cab with your favourite tools and accessories





**M01**

024500001

4,5 Kg



22

42 6-7-8-9-10-11-12-13-14-15-16-17-18  
19-20-21-22-24-27-30-32-36 mm

**M25**

024500025

5,1 Kg



40

42 6-7-8-9-10-11-12-13-14-15-16-17-18-19-21-22-24-27 mm  
90 6x7-8x9-10x11-12x13-14x15-16x17-18x19 mm  
123Q1/4  
123Q3/8  
123Q1/2  
142 8-9-10-11-12-13-14-15-16-17-18-19 mm

**M30**

024500030

4,2 Kg



31

55 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm  
90 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm  
96BPC/SC9 1,5-2-2,5-3-4-5-6-8-10 mm

**M60**

024500060

1,9 Kg



23

○ 96T 2-2,5-3-4-5-6-7-8-10 mm  
○ 97BTX/SC8 T9-T10-T15-T20-T25-T27-T30-T40 mm  
○ 944BX 5-6-7-8-10-13 mm

**M63**

024500063

3,4 Kg



8

○ 952 7-8-10-12-13-14-17-19 mm

**M100**

024500100

6,7 Kg



98

1/4" 12"

895/1 - 895/3 - 895/6  
○ 900 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm  
○ 900L 5-6-7-8-9-10-11-12-13 mm  
○ 900ME 3-4-5-6-7 mm  
● 900LP 0,8x4-1x5,5-1,2x6,5-1,2x8 mm  
● 900PH PH1-PH2-PH3-PH4  
○ 900TX T10-T15-T20-T25-T27-T30-T40  
900/20 50 mm - 900/20L 100 mm  
900/21 150 mm  
900/25  
900BG/30  
900/42

● 900/55  
○ 920A 8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-28-30-32 mm  
920/15 - 920/25  
920AN/125 125 mm  
920AN/250 250 mm  
920/42  
● 920/55  
● 920FTX 10-12-14-16-18-20-22-24 mm  
○ 920AL 10-12-13-14-15-16-17-18-19-21-22 mm

## M105

024500871

7,7 Kg



116

1/4" 3/8" 1/2"

- 900 4-4,5-5-5,5-6-7-8-9-10  
11-12-13-14 mm
- 900L 5-6-7-8-9-10-11-12-13 mm
- 96BPC/SC9 1,5-2-2,5-3-4-5-6-8-10 mm
- 895/1 - 895/3 - 895/6
- 900ME 3-4-5-6-7 mm
- 900LP 0,8x4-1x5,5-1,2x6,5-1,2x8 mm
- 900PH PH1-PH2-PH3-PH4
- 900TX T10-T15-T20-T25-T27-T30-T40
- 900/16 □ 1/4 - ■ 3/8
- 900/... 50-100-150 mm
- 900/25 - 900BG/30 - 900/42
- 900/55
- 910A 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22 mm
- 910/15 □ 3/8 - ■ 1/4
- 910/16 □ 3/8 - ■ 1/2
- 910/21 125 mm
- 910/22 250 mm
- 910/25 - 910/42
- 910/55
- 920A 8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-28-30-32 mm
- 920/15 □ 1/2 - ■ 3/8
- 920/25 125 - 250 mm
- 920AN
- 920/42
- 920/55
- 956E 16-17,8-20,8 mm

## M118

024500118

8 Kg

FOR 140 mm DRAWERS



33

12"



91

- 1927P 1750 Nm
- 720L ○ 13-17-19-21-22-24 mm
- 720ME ○ 5-6-8-10-12-14-17-19 mm
- 720 ○ 10-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm
- 720LC ○ 17-19-21 mm

## M120

024500120

6,9 Kg



75

12"

- 920A 10-11-12-13-14-15-16-17-18-19-20-21-22-24-26-27-30-32 mm
- 920AN/125 125 mm
- 920AN/250 250 mm
- 920/25 - 920/42
- 920AL 10-12-13-14-15-16-17-18-19-22-24-27-30-32 mm
- 920FTX 10-12-14-16-18-20-22-24 mm
- 920/55
- 920PE 5-5L-6-6L-7-7L-8-8L-10-10L-12-12L-14-14L
- 920TX T20-T25-T27-T30-T40-T45-T50-T55-T60-T20L-T25L-T27L-T30L-T40L-T45L-T50L

## M129

024500129

3,4 Kg



13

- 1032 180 mm
- 1034 170 mm
- 1036 175 mm
- 1038 175 mm
- 1048N 250 mm
- 1052 240 mm
- 1082BM 160 mm
- 1098 220 mm
- 1112 250 mm
- 1128BM 145 mm
- 1150BM 180 mm
- 1166BM 160 mm
- 1168BM 160 mm

## M213

024500213

1,8 Kg



25

- 1201E 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
- 1201EN 4x30 mm
- 1202E PH0x60-PH1x80-PH2x100-PH3x150 mm
- 1202EN PH1x30 mm
- 1207E/TX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45
- 1253 3,5x100 mm

## M230

024500230

3,2 Kg



25

- 30 Ø 2-3-4 mm
- 31 Ø 2-3-4-5-6-8 mm
- 32 Ø 4 mm
- 34 150 mm
- 35 200-250 mm
- 36 125 mm
- 1370 500 g
- 1390 Ø 35 mm
- 1692 3 m
- 1712TF
- 1719BMA/Q 200 mm
- ▲ 1719BMA/T 200 mm
- 1719BMA/P 200 mm
- ▶ 1719BMA/M 200 mm
- 1719BMA/R 200 mm
- 1737NX
- 1771 170 mm

## M320

024500320

5 Kg

FOR 140 mm DRAWERS



146



- 410MIX/SEL19
- 861/C100
- 862F/A7
- 862XP/A16
- 1972/K20V-13BMC

NEW!



<b>T01</b> <b>024240001</b>  <b>17</b>  <b>2,7 kg</b> 42 6-7-8-10-11-12-13-14-16-17-18-19-21-22-24-27-30 mm	<b>T05</b> <b>024240005</b>  <b>16</b>  <b>1,5 kg</b> 42 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21 mm	<b>T06</b> <b>024240006</b>  <b>5</b>  <b>2,1 kg</b> 42 22-24-27-30-32 mm	<b>T31</b> <b>024240031</b>  <b>27</b>  <b>3 kg</b> 31 Ø 2-3-4-5-6 mm 32 Ø 4 mm 55 6x7-8x9-10x11-12x13-14x15-16x17-18x19 20x22-21x23-24x26-27x29-30x32 mm ○ 96N/SC9 1,5÷10 mm
<b>T45</b> <b>024240045</b>  <b>12</b>  <b>1,3 kg</b> 142 8-9-10-11-12-13-14-15-16-17-18-19 mm	<b>T50</b> <b>024240050</b>  <b>11</b>  <b>1,3 kg</b> ○ 96T 2-2,5-3-3,5-4-4,5-5-6-7-8-10 mm	<b>T63</b> <b>024240063</b>  <b>8</b>  <b>3,8 kg</b> ○ 952 7-8-10-12-13-14-17-19 mm	<b>T68</b> <b>024240068</b>  <b>6</b>  <b>590 g</b> ○ 951 2,5-3-4-5-6-8 mm
<b>T80</b> <b>024240080</b>  <b>29</b>  <b>4,1 kg</b> ○ 920A 10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-30-32 mm ○ 920ME 5-6-8-10-12 mm 920/21 125 mm 920/22 255 mm 920/25 - 920/42 305 mm @ 920/55	<b>T91</b> <b>024240091</b>  <b>25</b>  <b>560 g</b> ○ 900 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm ○ 900ME 2,5-3-4-5-6-8 mm 900/20 50 mm 900/21 150 mm 900/25 - 900BG/30 - 900/42 115 mm @ 900/55	<b>T92</b> <b>024240092</b>  <b>22</b>  <b>1,5 kg</b> ○ 910A 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22 mm 910/21 125 mm 910/42 210 mm 910/22 250 mm @ 910/55 910/25	<b>T137</b> <b>024240137</b>  <b>3</b>  <b>750 g</b> 1084BM 160 mm 1150BM 180 mm 1166BM 160 mm
<b>T145</b> <b>024240145</b>  <b>4</b>  <b>640 g</b> ○ 1032 180 mm ○ 1034 170 mm ● 1036 175 mm ● 1038 175 mm	<b>T221</b> <b>024240221</b>  <b>7</b>  <b>530 g</b> Beta evox ● 1201E 3x75-4x100-5,5x150-6,5x150 mm ● 1202E PH0x60-PH1x80-PH2x100 mm	<b>T234</b> <b>024240234</b>  <b>4</b>  <b>1,3 kg</b> 35 100-200 mm 1370 300 g 1390 ø 35 mm	<b>T236</b> <b>024240236</b>  <b>5</b>  <b>870 g</b> ■ 1719BMA/Q 200 mm ▲ 1719BMA/T 200 mm ■ 1719BMA/P 200 mm ■ 1719BMA/M 200 mm ● 1719BMA/R 200 mm

# MODULAR

## NEW RANGE OF WORKBENCHES

**NEW!**

Beta has launched the new range of workbenches, MODULAR, designed to make it possible for professionals to configure their workplaces from scratch, adapting them to their individual needs.

The range comes in a wide choice of preassembled combinations; alternatively, you can fully customize your configuration, including the worktops, legs, mobile roller cabs and tool chests, tool wall systems and accessories.



### ROLLER CABS




### WALL SYSTEM



### LEGS



### WORKTOP



The 75-cm-deep worktop means having a large, convenient, functional work surface available. It can be fitted with a vice, thereby allowing heavy-duty jobs to be carried out.

The new MODULAR range, designed according to the latest ergonomics studies, is enhanced by Beta's well-known sturdiness and quality, thereby standing out as an essential work partner.



CONFIGURE YOUR **WORKSHOP ONLINE**  
go to **[www.beta-tools.com](http://www.beta-tools.com)**

**DISCOVER THE ONLINE CONFIGURATOR**





## C58BC-W2,1+SVR

- Worktop (2,100x750 mm) made from multi-ply wood, 38 mm thick
- Front centralized lock
- Steel frame with 4 supporting legs
- Holes for a vice (1599F/150 - 1599GI/150, to be ordered separately)
- 2 lower half-shelves for objects, 1,788x335 mm; thickness: 40 mm
- Static load capacity: 800 kg, evenly distributed
- Can be fixed to floor

**Kit with 4 perforated tool panels, comprising the following:**

- 3 supporting brackets
- 6 400-mm uprights
- 2 1,015-mm supports; can accommodate 1 19" rack multi-socket (not included)
- 4 perforated tool panels, 1,015x25x400 mm



### C58BC-W2,1 4C+SVR

146 Kg

**NEW!**

**Workbench, 2.1 m long, with wood worktop, with 4 drawers**

- 4 drawers (367x588 mm) with ball bearing slides:
  - 2 drawers 70 mm high
  - 2 drawers 140 mm high.
- Drawer bases protected by foamed rubber mats

- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays



Ral 2011	Ral 7016
058000723	058000727



### C58BC-W2,1 4CA+SVR

161 Kg

**NEW!**

**Workbench, 2.1 m long, with wood worktop, 4 drawers and door module**

- 1 module with door and lock
- 4 drawers (367x588 mm) with ball bearing slides:
  - 2 drawers 70 mm high
  - 2 drawers 140 mm high.
- Drawer bases protected by foamed rubber mats

- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays



Ral 2011	Ral 7016
058000733	058000738




## C56PL 0

056000021

18,5 kg

### Folding workbench lightweight reliable

- Lightweight, easy to carry.
- Worktop (800x500mm) made of galvanized sheet iron, for use on one side, protected by an anti-oil and anti-petrol rubber cover.
- Handle with rubber cover, for easy transportation.
- An additional sturdy, reliable worktop, always within reach



EVEN LIGHTER!  
**ONLY 18.5 KG**

## C56BLP

056000005

11,4 kg

**NEW!**

### Multi-purpose folding workbench



- Worktop (820x630 mm) made from polypropylene, with graduation in millimetres and inches
- Handle for easy transportation
- Lower shelf for objects
- Telescopic aluminium legs (550-820 mm)
- Can be used as a stand
- Non-slip feet

**ONLY 11,4 KG!**


**READY FOR USE IN JUST A FEW SECONDS,  
EASY TO CARRY AND STORE IN SMALL SPACES.**

### FIXED ACCESSORIES INCLUDED:

- SLIDING CLAMPS (2 PCS)
- FIXED CLAMPS (2 PCS)
- SHEET METAL SUPPORT (2 PCS)

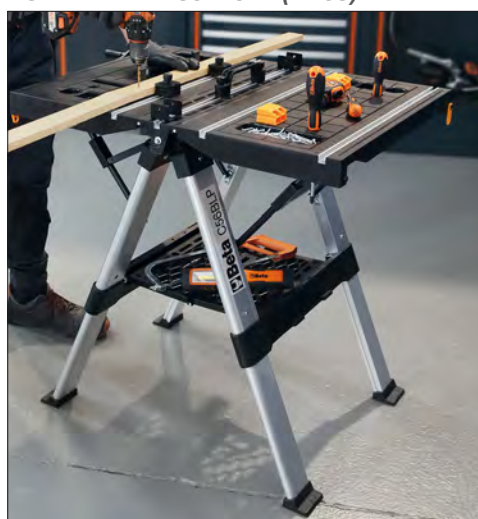



**3068**

030680000

61 kg



## Manual pallet truck with low forks

### Features:

- 2 steering wheels, 200x50 mm, made of PU
- Double front rollers, 80x70 mm, made of PU
- Pallet access entry and exit rollers
- Depth stop notch
- Lowering speed control valve
- Safety overload valve

### Technical data:

- Maximum capacity: 2500 kg
- Overall length: 1200 mm
- Fork length: 800 mm
- Fork width: 540 mm
- Individual fork width: 160 mm
- Lever height: 1230 mm
- Max. lifting height: 115 mm


**3069**

69,5 kg

030690000

## Manual pallet truck

### Features:

- 2 steering wheels, 200x50 mm, made of PU
- Double front rollers, 80x70 mm, made of PU
- Pallet access entry and exit rollers
- Depth stop notch
- Lowering speed control valve
- Safety overload valve
- 3-position operating lever

### Technical data:

- Maximum capacity: 2500 kg
- Overall length: 1550 mm
- Fork length: 1150 mm
- Fork width: 540 mm
- Individual fork width: 160 mm
- Lever height: 1230 mm
- Max. lifting height: 115 mm
- Pallet storage corridor: 800x1200 lengthwise: 1805 mm
- Turning radius: 1347 mm


**C48M**

048000230

140 kg

## Electric platform cart, with panels

- Motorized platform, with 24V - 400W motor with 2x12V 33Ah battery supply and Curtis control card
- Loading floor made from sturdy steel, coated with non-slip rubber, with round tubular panels preventing objects from falling during transport
- The panels can be removed, to cater to individual transportation requirements
- Fitted with 2 pneumatic traction wheels (Ø 260 mm) and 2 swivelling rubber wheels (Ø 150mm), electromagnetic brake and differential gear
- Supplied with an external battery charger, 220V/50Hz - V/A 24/12


**Beta  
BRUTUS**


### FUNCTIONAL SPECIFICATIONS

- Carrying capacity: 400 kg
- Driving speed: 4-6 km/h (adjustable)
- Battery life: 4 hours
- Maximum permitted slope with a full load: 6%
- Maximum permitted slope with 100 kg load: 18%

### TECHNICAL SPECIFICATIONS

- Overall dimensions: 1280x630x1100h mm
- Useful dimensions of loading platform with panels: 1180x580 mm
- Useful dimensions of loading platform without panels: 1260x620 mm
- Height of loading platform from floor: 320 mm
- Height of battery compartment from floor: 65 mm
- Weight with batteries: 140 kg

### SAFETY DEVICES:

- Electronic brake
- Buzzer
- Anti-crushing guard
- Battery charge indicator
- Curtis control cart

## C41H

21 kg

### Two-module tool trolley

- Sheet metal frame and plastic tops, synonymous with remarkable sturdiness and reduced weight
- 2 detachable modules:
  - 1 upper tool box,
  - 1 module with 2 drawers 95 mm in height,
  - 1 pull-out case made of plastic, 66 mm high,
  - and 1 drawer 295 mm in height
- Oversized castors (160 mm), built into frame for easy transport - for example, on steps
- Side centralized lock for closing drawers of lower module
- Drawers with ball bearing slides and double closing hook
- Telescopic aluminium handle
- Small tool holder built into upper tool box
- Lower drawer with double ballbearing slide



920 mm  
335 mm  
536 mm

041000002 041000021  
041000024 041000006  
041000012 041000008  
041000010 041000005

## C19

021190001 3,4 kg

### Three-section cantilever tool box, made from sheet metal, empty



160 mm  
200 mm  
450 mm

## C20L

021200002 5,4 kg

### Five-section cantilever tool box, made from sheet metal, empty



210 mm  
200 mm  
550 mm

## CP15

021150201 2 kg

### Tool box, made from plastic, removable tote-tray and tool trays, empty

- 1 tool tray built into cover
- 2 removable tool trays with adjustable partitions
- 1 interior tote-tray with adjustable partitions
- Carrying capacity: 30 kg



250 mm  
240 mm  
445 mm

### Tool trunk, made of sheet metal, empty

## C22B-0

022000150 13 kg

720x320x310 mm

## C22BM-0

022000160 20 kg

850x360x350 mm

## C22BL-0

022000170 26 kg


1010x410x400 mm





**2700S/VU**

20 kg

**NEW!****Folding tool trolley for outdoor jobs, with 100 tools****+ 100 TOOLS** **Beta**  
*Included in the price***PATENTED!**

- Sheet metal frame.
- Registered model.
- 2 drawers, 588x277 mm, with ball bearing slides, for two-way opening.
- Large lower storage compartment, 588x277x220 mm.
- 2 fixed castors, Ø 160 mm, and 2 steering castors with brake, Ø 100 mm
- Thermoplastic worktop with 6 built-in tote trays.
- Centralized lock.
- Can accommodate drawer partitions and MC foam tool trolleys.



Ral 2011	Ral 7016	Ral 3000
027000231	027000232	027000233

n°	Max
2	70 mm
	20 kg

**Quantity/Description**

7	combination wrenches 6-7-8-10-13-17-19 mm	Beta N. 42
9	offset hexagon key wrenches Ø 1,5-2-2,5-3-4-5-6-8-10 mm	BW 96N/SC9
1	Adjustable wrench 150 mm	111E
61	Set of 60 bits with magnetic bit holder, in pocket-size case	BW 861/C61
1	diagonal cutting nippers, slip-proof double layer PVC coated handles, industrial finish 160 mm	1082G
1	electrician's scissors, straight blades	1128BMX
1	heavy duty combination pliers, slip-proof double layer PVC coated handles, industrial finish 180 mm	1150G
3	screwdrivers for slotted head screws 3,5x100-5,5x150-6,5x150	1290
3	screwdrivers for cross head Phillips screws PH0x100-PH1x120-PH2x150	1292
1	engineer's hammer 300g	1370
1	measuring tape 3m	1692
1	snap-off blade utility knife 18 mm	1771
10	18 mm snap-off spare blades (10 pieces) for utility knives 1771, 1771BM, 1771HD 1771RL	

- Folding tool trolley; pillars can swing down for space saving transport.

**C51**


21 kg

**Trolley**

- 3 tops covered in antislip ribbed rubber
- Two fixing options for central worktop
- Four castors Ø 100 mm: 2 fixed and 2 steering (1 with brake)



Ral 2011	Ral 7016	Ral 3000
051000001	051000002	051000003



## 2080/V12

020800000 1,8 kg

### Organizer tool case with 12 removable tote-trays

Removable, folding clear tote-trays, for immediate recognition of contents



300x330x145 mm

## 2080/V17

020800200 750 g

### Organizer tool case with 17 removable tote trays

A must-have for accommodating and carrying smallwares tidily and accurately.



335x285x65 mm



## 2080/DS

020800210 760 g

### SMALL organizer tool case, with 15 compartments and 10 removable partitions

The perfect solution for carrying smallwares, including screws, nuts, washers, rivets and dowels.



Can be put on top, and hooked to, each other



375x315x65 mm



440x330x75 mm



Can be put on top, and hooked to, each other

## 2036/TV

020360000 7,5 kg

### Tool trolley, made of thick polypropylene, aluminium edged

- Telescopic handle
- Ball bearing castors



480x267x408 mm



- 2 tool panels



## C5

021050000 2,8 kg

### Rucksack, empty

- Removable interior tool panel
- Six exterior pockets and two interior pockets
- Waterproof plastic base
- Double safety lace for fixing rucksack to shoulders
- Ergonomic padded back

400x200x500 mm



## C6T

021060010 4,9 kg

### Rucksack with castors, empty

- Telescopic handle for easy transport
- Built-in castors with practical dustproof cover for use as a rucksack
- Two removable tool panels
- Interior PC pocket and five exterior pockets
- Waterproof plastic base

360x200x480 mm



### Technical fabric tool box, empty

- Hard frame
- Double bottom
- Tilting handle for easier access to tools
- Elastic tool bands and interior and exterior pockets
- Cover
- Tool tray included in double bottom
- Can be used with trolley C8

## C10S

021100001 2,9 kg

420x220x250 mm

## C10

021100000 3,3 kg

520x220x250 mm



## C11

021110000 1,8 kg

### Technical fabric tool box, empty

- Hard water resistant plastic base
- Elastic tool bands and interior and exterior tool pockets
- Document holders built into double bottom of cover



410x230x250 mm

## C7AT

021070010 2,8 kg

### Servicing tool bag made from technical fabric, empty

- Made from super durable technical fabric
- Reinforced base with rubber feet
- Dual top handle for a safe, balanced hold
- Large front document pocket with zip closure and additional compartment with dual strap + clip closure
- dual side pocket with strap closure
- Capacious interior compartment with additional document pocket
- Supplied complete with adjustable padded shoulder strap

#### Front zipper opening on both bag sides for quick access to tools:

- 29 compartments and 13 elastic tool bands on front side
- 33 tool compartments on rear side



470x200x340 mm

- PC and tablet compartment with protective interior padding (PC size up to L=370 mm, H=250 mm)



## C9DA

021090005

2,4 kg

### Tool bag with large opening, empty

- Made from super durable technical fabric
- Hard plastic base, water-resistant
- Reinforced top handle for a safe hold
- Dual side pocket with strap closure
- Supplied complete with adjustable padded shoulder strap
- Two side tool compartments with large openings, for quick access to and perfect visibility of contents
  - 22 tool pockets and additional compartment with zip closure on front side
  - 14 tool pockets and additional zipped compartment on rear side



420x220x310 mm

## C3

021030000

917 g

### Mini tool bag, made from technical fabric

- 1 exterior front pocket with zip closure
- 2 side pockets with tote trays
- 1 convenient rear pocket with Velcro closure
- 1 removable interior tool panel, with elastic bands on both sides
- Complete with shoulder strap



230x110x320 mm



**A MINI TOOL BAG  
TO ALWAYS BRING WITH YOU!**



- USB interface for charging mobile devices

## 2001/BZ27 VU

020010157

3,9 kg

### Folding tool case with assortment of 27 tools, for universal use



380x290x60 mm

27



#### Quantity/Description

- 1 electrician's scissors, straight blades
- 1 combination pliers bright chrome-plated 180 mm
- 6 combination wrenches 7-8-10-13-17-19 mm
- 3 screwdriver for slotted head screws 3x75-4x100-5,5x150 mm
- 3 screwdriver for cross head Phillips® screws
  - PH0x60 - PH1x80 - PH2x100 mm
- 9 offset hexagon key wrenches 1,5-2-2,5-3-4-5-6-8-10 mm
- 1 engineer's hammer 300 g
- 1 Slip joint pliers boxed joints 250 mm
- 1 measuring tape 5 m
- 1 snap - off blade utility knife 18 mm

#### Beta N.

- 1128BMX
- 1150
- 42
- 1201E
- 1202E
- 96/SC9
- 1370
- 1048N
- 1692/5
- 1771



42

## BETA'S ICONIC WRENCH



**A stylish, slim shape enhanced by a slender profile, lighter to the touch.**

*The strength, resilience and ergonomic design of the Beta wrench reach even higher values, to provide users with the best possible tool.*

*The manufacturing process is carried out in our factories in Sovico and Sulmona, on the basis of state-of-the-art automation technology and the best trained workers.*



### POWERFUL

Torque values more than doubled compared to the requirements to be satisfied under ISO 1711.

### STRENGTH

Remarkable strength: in case of improper use, the wrench buckles, without breaking suddenly and dangerously.

### ERGONOMIC

The offset ring has a 15 degree angle to protect the hand. The shape is obtained from a die; it is not bent later.

### 42/SP15

000421078

**Set of 15 combination wrenches with holder**



6-7-8-9-10-11-12-13-  
14-15-16-17-19-22-24 mm

### 42/SP25

000421085

**Set of 25 combination wrenches with holder**



6-7-8-9-10-11-12-13-14-15-16-17-18-19-20  
21-22-23-24-25-26-27-28-30-32 mm

### 55/B12N

000550164

**Set of 12 double open end wrenches in roll-up wallet made of durable polyester**



6x7-8x9-10x11-12x13  
14x15-16x17-18x19  
20x22-21x23-24x26  
25x28-30x32 mm

### 42/SC9I

000421087

**Set of 9 combination wrenches with compact support**

- Compact, practical, easy-to-carry support
- Quickly identified wrench size
- Wrench safely locked in support

8-10-11-12-13-14-15-17-19 mm



## 141/B6

001410066

Set of 6 ratcheting combination wrenches, straight series, in cloth wallet

8-10-13-14-17-19 mm



## 142SN/SC9

001420259

Set of 9 swivel end ratcheting combination wrenches, with compact support

8-10-11-12-13-14-15-17-19 mm



## 142/SC9I

001420087

Set of 9 reversible ratcheting combination wrenches, with compact support

8-10-11-12-13-14-15-17-19 mm




## 192/S2

001920070

Set of 2 reversible ratcheting offset bi-hex ring wrenches



## 8 SIZES IN 2 WRENCHES

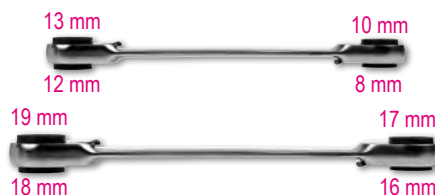

## 186 8-32


001860008

Self-locking wrench with automatic take-up device for hexagons, 8 to 32 mm

Ideal for hexagon, Spline, square and Torx® head screws, including damaged screws



L 260 mm

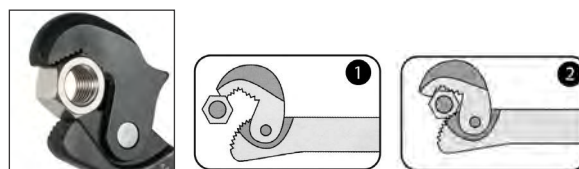



111

## THE ADJUSTABLE WRENCHES WITH SCALES



Beta 111 allow differently sized nuts and bolts to be tightened and loosened through the sliding jaws, which can be adjusted through the central rolls.

Head angled at 15°, allowing hardly accessible spaces to be reached, as is the case with our iconic combination wrenches, "42"

15°

Made from high-performance alloy steel for increased mechanical torsional strength

Hole on handle for hanging wrench

Double laser marking in mm/inches

Compact head with completely open jaw

Special heat treatment for excellent wear resistance

Based on the new ergonomic properties, weight has been **reduced by 20%**

111E

Adjustable wrenches with scales, chrome-plated

- right-hand rotation of pin



	L mm	L "	A max mm		
<b>111E 100</b>	100	4	15	001110110	
<b>111E 150</b>	150	6	24	001110115	
<b>111E 200</b>	200	8	29	001110120	
<b>111E 250</b>	250	10	34	001110125	
<b>111E 300</b>	300	12	40	001110130	
<b>111E 380</b>	380	15	45	001110138	
<b>111E 450</b>	450	18	54	001110145	
<b>111E 600</b>	600	24	62	001110160	

111E/D3

001110163

NEW!

Set of 3 adjustable wrenches with scales, chrome-plated

111E 150

111E 200

111E 250



111CM

Wide opening adjustable wrenches, **CHROME-PLATED**, short series

- right-hand rotation of pin



	L mm	L "	A max mm		
<b>111CM 170</b>	170	6	32	001110770	
<b>111CM 220</b>	220	8	38	001110722	
<b>111CM 270</b>	270	10	46	001110727	

111EN

Adjustable wrenches with scales, phosphated

- left-hand rotation of pin



	L mm	L "	A max mm		
<b>111EN 100</b>	100	4	15	001110410	
<b>111EN 150</b>	150	6	24	001110415	
<b>111EN 200</b>	200	8	29	001110420	
<b>111EN 250</b>	250	10	34	001110425	
<b>111EN 300</b>	300	12	40	001110430	
<b>111EN 380</b>	380	15	45	001110438	
<b>111EN 450</b>	450	18	54	001110445	

## 96/SC9

000960374



Set of 9 offset hexagon key wrenches

Ø mm	L mm
1,5	45
2	50
2,5	57
3	64
4	72
5	83
6	94
8	105
10	119

COMPACT




## 96BPC/SC9

000960354



Set of 9 ball head offset hexagon key wrenches

Ø mm	L mm
1,5	79
2	84
2,5	89
3	99
4	108
5	126
6	148
8	168
10	187



## 97BTX/SC8

000970164



Set of 8 ball head offset key wrenches, long model, for Torx® head screws

Ø mm	L mm
T9	62
T10	71
T15	81
T20	92
T25	94
T27	105
T30	114
T40	129




## 97BTXL/SC8

000970364



Set of 8 ball head offset key wrenches, long model, for Torx® head screws

Ø mm	L mm
T9	80
T10	86
T15	100
T20	110
T25	126
T27	140
T30	160
T40	176



EXTRA LONG  
VERSION +25%




## 97BRTL/SC8

000970464



Set of 8 ball head offset key wrenches, long model, for Tamper Resistant Torx® head screws

Ø mm	L mm
T9	80
T10	86
T15	100
T20	110
T25	126
T27	140
T30	160
T40	176



EXTRA LONG  
VERSION  
+25%



## 96LBP/SC9

000961354



Set of 9 ball head offset hexagon key wrenches

Ø mm	L mm
1,5	90
2	100
2,5	112
3	127
4	144
5	163
6	184
8	204
10	230



EXTRA LONG  
VERSION  
+30%



## 96BP-HO/SC9

000961254

NEW!

Set of 9 ball head offset hexagon key wrenches, with screw holding system

Ø mm	L mm
1,5	79
2	84
2,5	89
3	99
4	100
5	126
6	148
8	168
10	187




## 96BP-CL/SC9

000961619

Set of 9 ball head offset key wrenches, coloured

Ø mm	L mm
1,5	91
2	102
2,5	113
3	128
4	143
5	163
6	185
8	206
10	231



EXTRA LONG  
VERSION +30%





## 96T/S5P

000960946

**Set of 5 offset hexagon key wrenches with handles**

○ 2,5-3-4-5-6 mm



## 97TTX/S6

000970791

**Set of 6 ball head offset key wrenches for Torx® head screws with handles**

○ T10-T15-T20  
T25-T30-T40



## 951

### THE ORIGINAL ONE

When this wrench was launched, back in 1980, it was a revolution. Designed to work on high-resistance screws, it is the name for quick handling, accurate fit and flexible use.

The hexagon T handle can be adjusted as required.

The hexagon ends are designed to transmit the maximum possible torque to the screw.

The rod length allows remarkable torques to be effortlessly applied to the screws.

Ongoing production improvements have translated, for example, into sandblasted finishes and sharp-edged hexagon ends which allow a better fit onto any screws, including damaged ones. Laser marking results in a sturdier rod.

## 951/S6

0009510687

**Set of 6 T-handle wrenches with three hexagon male ends**

○ 2,5-3-4-5-6-8 mm



## 952

### THE RELIABLE ONE

Reliable, precise pre-positioning is the secret for the success of this wrench.

The articulated joint maintains its function over the years, no adjustment being required.

Socket rotation angle: 50°.

Can be used at 90° in fixed position.

Sliding T-handle, can be stopped in the required position throughout its length.


Triple size marking on head.

## 952/D7

0009520079

**Set of 7 T-handle wrenches with swivelling hexagon sockets**

○ 7-8-10-12-13-14-17 mm

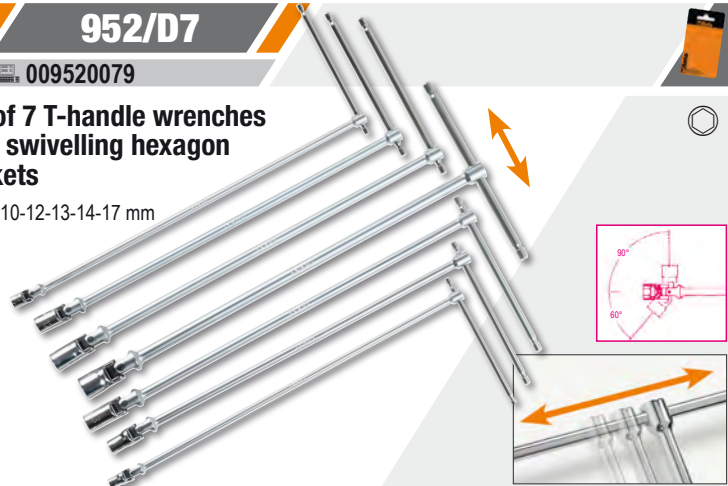

## 950/D6

0009500096

**Set of 6 T-handle hexagon socket wrenches**

○ 7-8-10-13-17-19 mm



# THE FUNCTIONAL, ERGONOMIC BETA EVOX SCREWDRIVER



## IS ALSO ELECTRICAL NOW!

1/4

Life: you can tighten up in up to 1,000 screws with one charging cycle

**Versatility:** this item caters to all needs; it is supplied with a belt case, complete with 6 50-mm bits with mixed heads. In addition, it can be used with all bits with 1/4" hexagon drives.

**Convenience:** the reduced dimensions and front LEDs make it perfect for use in small, poorly lit spaces.

**Flawless grip:** it fits your hand and allows a firm, comfortable hold, during both electrical and manual operation, resulting in reduced hand and wrist fatigue.



### 6 50 mm-LONG MIXED BITS INCLUDED

#### 1210E/GE

012100701

Evox-E electric screwdriver



#### 1211E/GE

012110701

Evox-E electric screwdriver

1000 V



#### Technical data:

- 3.7V 2300mAh lithium battery
- Maximum torque in electric mode: 1.2 Nm
- Over 1,000 screw fastenings at 1.2 Nm per charging cycle
- Speed: 250 rpm
- Outstanding static resistance (up to 12 Nm, manual tightening)
- Outstanding mechanical resistance
- 1/4" magnetic bit holder
- Compatible with all standardized bits
- Rechargeable via USB-C cable (included)
- USB-C port protected with screw cap
- Front ring LEDs for improved visibility of working area
- When charging, steady LEDs indicate that charging is complete
- Ergonomic nylon handle inspired by Evox screwdriver
- Built-in and sealed operation buttons
- Convenient belt pouch with bit pockets (6 mixed bits included)



**1203E/D5**

012031001

**Set of 5 screwdrivers**

1201E ● 3,5x100-5,5x150-6,5x150 mm  
1202E ● PH1x80-PH2x100 mm

**1203E/D8P**

012031018

**Set of 8 screwdrivers**

1201E ● 2,5x50-3x75-4x100-5,5x100-6,5x150 mm  
1202E ● PH0x60-PH1x80-PH2x100 mm

**1203E/D10N**

012031019

**Set of 10 screwdrivers**

1201E ● 2,5x50-3x75-4x100-5,5x150-6,5x150 mm  
1202E ● PH0x60-PH1x80-PH2x100 mm  
1201EN ● 4x30 mm  
1202EN ● PH1x30 mm

**1207E/TX-D7**

012071207

**Set of 7 screwdrivers**

1207E/TX ● T6-T8-T10-T15-T20-T25-T30

**1263/D8**

012630008

**Set of 8 screwdrivers**

1260 ● 2,5x50-3x75-4x100-5,5x125-6,5x150 mm  
1262 ● PH0x60-PH1x80-PH2x100 mm

**1263/D10**

012630010

**Set of 10 screwdrivers**

1260 ● 3x75-3,5x100-4x125-5,5x150-6,5x150 mm  
1262 ● PH0x60-PH1x80-PH2x100 mm  
1260N ● 4x30 mm  
1262N ● PH1x30 mm

**1267TX/D7**

012670307

**Set of 7 screwdrivers**

1267TX ● T6-T8-T10-T15-T20-T25-T30

**1293/S12**

012930203

**Set of 12 screwdrivers**

1290 ● 0,5x3x75-0,8x4x125-1x5,5x150  
1,2x6,5x150-1,2x8x200 mm  
1290N ● 0,8x4x30 mm  
1292 ● PH0x3x60 -PH1x4,5x80  
PH2x6x100-PH3x8x150 mm  
1292N ● PH1x4,5x30-PH2x6x30 mm


**1243/D7**

012430017

**Set of 7 screwdrivers with steel heads**

1241 ● 5,5x100-6,5x125-1,2x150-1,6x200 mm  
1242 ● PH1x100-PH2x100-PH3x150 mm

**Beta** *evolution*  
**THE EVOLUTION OF  
THE SCREWDRIVER!**



Set of 10 bits with magnetic bit holder, in pocket case

1/4

**NEW!**



**861MIX/A10**

008610800

- 861LP 0,5x3-1x5,5-1,2x6,5 mm
- ⊕ 861PH PH1-PH2(x2)-PH3
- ⊕ 861PZ PZ1-PZ2-PZ3
- 882M1 ○ 1/4
- 1/4



**861PE/A10**

008610820

- 861PE 2-2,5-3(x2)  
4(x2)-5(x2)  
6-8 mm
- 882M1 ○ 1/4
- 1/4



**861PHZ/A10**

008610810

- ⊕ 861PH PH1-PH2(x3)-PH3
- ⊕ 861PZ PZ1-PZ2(x3)-PZ3
- 882M1 ○ 1/4
- 1/4



**861TX/A10**

008610870

- ⊕ 861TX T7-T8-T9-T10  
T15-T20-T25  
T27-T30-T40
- 882M1 ○ 1/4
- 1/4



**867/C52**

008670901 2,1 kg

52 hexagon bits,  
10 mm and  
2 accessories

10 mm

52x

250x170x70 mm



	867PE	○ 4-5-6-7-8-10-12 mm
	867PE/L	○ 4-5-6-7-8-10-12 mm
	867XZN	○ M5-M6-M8-M10-M12
	867XZN/L	○ M5-M6-M8-M10-M12
	867TX	⊕ T20-T25-T30-T40-T45-T50-T55
	867TX/L	⊕ T20-T25-T30-T40-T45-T50-T55
	867RTX	⊕ T20-T25-T30-T40-T45-T50-T55
	867RTX/L	⊕ T20-T25-T30-T40-T45-T50-T55
	867/I	○ 10 mm - □ 3/8"
	867/2	○ 10 mm - □ 1/2"

**862F/A7**

008620950

Set of 7 magnetic bits,  
hexagon sockets,  
in plastic case

○ 5,5-6-7-8-10-12-13 mm

7x

1/4



**862XP/A16**

008620960

Set of 16 impact bits  
in pocket-size case

Impact bits

- ⊕ PH2(x2)-PH3
- ⊕ PZ2(x2)-PZ3
- ⊕ T20-T25(x2)
- T30(x2)-T40(x2)
- 4-5-6 mm

16x

1/4



50 mm

**1256/C36-2**

012560100 200 g

Bi-material microscrowdriver with 36 interchangeable  
4-mm bits and magnetic extension

	1256TX	⊕ T3-T4-T5-T6-T7-T8-T9-T10-T15
	1256RTX	⊕ T6-T7-T8-T9-T10
	1256LP	● 0,8-1,2-1,5-1,8-2,2-2,5-3-3,5-4 mm
	1256PE	○ 0,7-0,9-1,3-1,5-2 mm
	1256PH	⊕ PH000-PH00-PH0-PH1
	1256PZ	⊕ PZ000-PZ00-PZ0-PZ1
	1256/20	
	1256/30	



130x60x35 mm



## 1600Q 10

016000010

### 1/4" Eight-way wrench, with articulated joint, for control panel operators

- Eight-way wrench, can be rotated to easily select the head to use.
- Magnetic articulated joint for increased force.
- 1/4" male drive for use of sockets.



Wrench for maintenance in numerous sectors, including electrical industry, plumbing, ventilation and gas.



## 861/C100

008616998

### 1/4" 98 bits with 2 bit holders, in case

- For manual, electric and pneumatic screwdrivers

155x117x37 mm



100x

- 861LP 3-4-4,5-5,5(x3)-6,5(x2)-8(x2) mm
- ⊕ 861PH PH0(x2)-PH1(x3)-PH2(x3)-PH3(x2)-PH4
- ⊕ 861PZ PZ1(x3)-PZ2(x3)-PZ3(x2)-PZ4
- 861PE 2-2,5(x2)-3(x2)-4(x2)-5(x2)-6(x2)-8-10 mm
- ⊗ 861TX T6-T7-T8-T9-T10(x2)-T15-T20(x2)-T25(x2)-T27-T30(x2)-T40(x2)
- ⊗ 861RTX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40
- ⊗ 861XZN M5-M6-M8
- ⊕ 861TQS 0-1-2-3-4-5-6-8-10
- ⊕ 861TRW 1-2-3-4-5-6
- ⊕ 861SP 4-6-8-10-12
- ⊕ 861SQ 0-1(x2)-2(x2)-3

155x117x37 mm

## 900/C39N

009000947

### 1/4" Assortment of 11 hexagon sockets, 21 bits and 7 accessories, in plastic case

39x



150x97x53 mm

900	5-5,5-6-7-8-9-10-11-12-13-14 mm	11
900/20	50 mm	1
900/20L	100 mm	1
900/25		1
900BG/30C	128 mm	1
892/0	1/4" - 1/4"	1
895/1	1/4" - 1/4"	1
861LP	0,6x4,5-1,2x6,5-1,2x8 mm	3
861PH	PH1-PH2-PH3	3
861PZ	PZ1-PZ2-PZ3	3
861PE	2,5-3-4-5-6 mm	5
861RTX	T10-T15-T20-T25-T27-T30-T40	7
900/55Z	126 mm	1



## 900/C39U


009001947

### 1/4" Assortment of 11 gear lock sockets, 21 bits and 7 accessories

39x



150x97x53 mm



900U	5-5,5-6-7-8-9-10-11-12-13-14 mm	11
900/20	50 mm	1
900/20L	100 mm	1
900/25		1
900BG/30C	128 mm	1
892/0	1/4" - 1/4"	1
895/1	1/4" - 1/4"	1
861LP	0,6x4,5-1,2x6,5-1,2x8 mm	3
861PH	PH1-PH2-PH3	3
861PZ	PZ1-PZ2-PZ3	3
861PE	2,5-3-4-5-6 mm	5
861RTX	T10-T15-T20-T25-T27-T30-T40	7
900/55Z	126 mm	1

# BETA'S RANGE OF RATCHETS

**NEW!**

## NEW DESIGN



Ratchet with up to 72 teeth:  
take-up angle of 5° for jobs in small areas

Phosphated  
square drive

Minimum head size

## INNOVATIVE MATERIALS FOR TOP PERFORMANCE

Ergonomic  
bi-material  
handle

Hanging hole on  
handle




- Designed and manufactured in the company's Italian-based factories, has been restyled.
- Hand pressing on head does not cause any reversal and allows for free lever return
- One-handed reversal

The versions with 1/2" and 3/4" square drives allow for reduced weight, thus resulting in a product synonymous with optimal handiness, superior ease of use as well as uncompromising sturdiness and performance.



	L mm	Ø mm	A mm	■	teeth		
<b>900/55</b>	127	25	29	1/4"		009001155	
<b>910/55</b>	207	31	33	3/8"		009101155	
<b>920/55</b>	271	40	41	1/2"		009201155	
<b>928/55</b>	504	58	59	3/4"		009281155	



## 900/C11

009000971 1,2 kg

**11 hexagon sockets,  
20 bits and 8 accessories,  
in metal case**

	861LP		0,5x3-0,8x5,5-1x5,5-1,2x6,5 mm
	861PE		3-4-5-6-8 mm
	861PH		PH0-PH1-PH2-PH3
	861TX		T8-T10-T15-T20-T25-T30-T40
	895/1		1/4" - 1/4"
	900		5-5,5-6-7-8-9-10-11-12-13-14 mm
	900/16		1/4" - 3/8"
	900/20		50 mm
	900/21		150 mm
	900/25		
	900/42		
	900BG/30		
	900/55		

1/4"

270x120x45 mm










**39x**



## 902A/C22

009020807 3,5 kg

**Assortment of 22 hexagon sockets and 6 accessories, in metal case**

<b>1/4"</b>		900	5-5,5-6-7-8-9-10-11-12-13 mm
		900/20	50 mm
		900/25	
		900/55	
<b>1/2"</b>		920A	10-13-14-15-17-18-19-22-24 27-30-32 mm
		920/21	125 mm
		920/25	
		920/55	

420x185x60 mm









**28x**

## 910A/C16

009100936 2,4 kg

**Assortment of 16 hexagon sockets and 5 accessories in foam tray, in metal case**

	910A	6-7-8-9-10-11-12-13-14-15-16-17-18-19-21-22 mm
	910/21	125 mm
	910/22	250 mm
	910/25	
	910/42	210 mm
	910/55	

**3/8"**

335x145x60 mm









**21x**

## 920A/C17M

009200924 5 kg

**Assortment of 17 hexagon sockets and 5 accessories in foam tray, in metal case**

	920A	10-11-12-13-14-15-16-17-18-19 20-21-22-24-27-30-32 mm
	920/21	125 mm
	920/22	255 mm
	920/25	
	920/42	305 mm
	920/55	

**1/2"**

420x185x60 mm









**22x**

## 928A/C12

009280955 13 kg

**Assortment of 12 hexagon hand sockets and 5 accessories, in metal case**

	928A	22-24-27-30-32-34-36-38-41 46-50-55 mm
	928/21	200 mm
	928/22	380 mm
	928/25	
	928/42	450 mm
	928/55	

**3/4"**

530x220x80 mm



**17x**

# TORQUE WRENCH ZERO-RESET

THE TORQUE WRENCH THAT DOES NOT REQUIRE RELEASING TENSION

Even if tension is not released, the number of cycles, durability and tightening accuracy as required by reference standards are guaranteed.

In order to confirm these parameters, Beta Utensili's Research & Development Department performed numerous durability tests at the in-house laboratories as at hundreds of end users.

This result has been obtained through:

- the use of the best-performing currently available materials;
- special heat treatments on interior parts.

## ZERO-RESET TECHNOLOGY

Based on higher-performance materials and improved heat treatment of both the spring and the component parts of the adjustment system, the wrench no longer requires releasing tension after use.

## EASY SETTINGS:

The graduated vernier scale allows minimum interval fractions to be set up (in tenths of Nm).



The Zero-Reset torque wrench was entirely designed and developed in-house and is manufactured at Beta Utensili's factories in Italy, using 100% Italian-made parts.



## IMPROVED VISIBILITY:

Double graduation in Nm for clearer, simpler torque visibility.

666

**ZERO-RESET click-type torque wrenches with reversible ratchets, for right-hand tightening, torque accuracy:  $\pm 3\%$**

UNI EN ISO 6789

1/4" 3/8" 1/2"



	Nm	■		L (mm)	g		
<b>666/2</b>	5÷25	1/4"	0,05	273	395	006660702	
<b>666/2X</b>	5÷25	3/8"	0,05	273	405	006660703	
<b>666/5</b>	10÷50	3/8"	0,25	342	680	006660705	
<b>666/10</b>	20÷100	3/8"	0,25	385	760	006660710	
<b>666/10X</b>	20÷100	1/2"	0,25	385	770	006660711	
<b>666/20</b>	40÷200	1/2"	0,5	471	1020	006660720	
<b>666/30</b>	60÷300	1/2"	1	600	1271	006660730	

667

**ZERO-RESET click-type torque wrenches with push-through ratchets, for right-/left-hand tightening, torque accuracy:  $\pm 3\%$**

UNI EN ISO 6789

12" 3/4"



	Nm	■		L (mm)	g		
<b>667/20</b>	40÷200	1/2"	0,5	471	1035	006670720	
<b>667/30</b>	60÷300	1/2"	1	600	1285	006670730	
<b>667/40</b>	80÷400	3/4"	1	710	2220	006670740	



## 599DGT-AW

NEW!

**Electronic torque wrench, torque and angle readout, with reversible ratchet and wireless data transmission, right-hand (accuracy:  $\pm 2\%$ ) and left-hand (accuracy:  $\pm 3\%$ ) tightening**

UNI EN ISO 6789


**1/4"** **3/8"** **1/2"**

- Tightening types: torque, angle, torque + angle
- Dual measurement mode: peak hold and track
- Light indicators, an intermittent sound and tactile feedback inform user that preset torque or angle has been reached
- Last 999 peak torque and/or angle readings can be stored and displayed
- 9 "Preset" modes can be saved and preset
- Key safety lockout
- Wrench can be associated with a certain user via software
- Tightening data traceability. Software allows date and time, tool serial number, set tightening value and reached value to be stored and associated with user ID
- Nonslip bi-material handle
- Wrench + software in 9 languages
- Included: 3 AA - 1.5V batteries, wireless USB key and software USB key



- Bi-directional wireless data transmission, from wrench to software and vice versa, in mass a posteriori or in real time
- Customized data processing software with immediate, easy-to-read OK/NG result and real time display of charts



TORQUE + ANGLE

## 599DGT-AW/30

005990702

Nm	Kgfm	lbf.ft	■	L (mm)	
6÷30	0,6÷3	4,5÷22	1/4"	410	0,1

## 599DGT-AW/135

005990713

Nm	Kgfm	lbf.ft	■	L (mm)	
27÷135	2,7÷13,5	20÷100	3/8"	445	1,0

## 599DGT-AW/340

005990734

Nm	Kgfm	lbf.ft	■	L (mm)	
68÷340	6,8÷34	50÷250	1/2"	615	1,0

## 605DGT/2

006050302

175 g



**Electronic torque wrench with reversible ratchet for right-/left-hand tightening torque accuracy  $\pm 3\%$  (right-hand)  $\pm 4\%$  (left-hand)**

UNI EN ISO 6789

1/4"

- Dual measurement mode: peak hold and track
- Power supply: 1 1.5V AAA battery (included)



- Light indicators and an intermittent sound inform user that preset torque has been reached

Nm	Kgfm	lbf.in	■	L (mm)	
4÷20	0,4÷2	35÷177	1/4"	210	0,01

## 677/C



UNI EN ISO 6789

3/4"

**Break-back torque wrenches with push-through ratchets, for right-hand and left-hand tightening, torque accuracy:  $\pm 4\%$  in case**

The break-back torque wrench, Beta 677, is particularly suitable for heavy-duty use at high torques. The break-back mechanism informs the user that the set torque has been reached through the bending of the wrench at the joint by approximately  $20^\circ$ .



- Wrench composed of two parts: lever with ratchet and break-back system with torque adjustment



	Nm	kgfm	lbf.ft	■	L (mm)		kg		
<b>677/C600</b>	120÷600	12÷60	100÷450	3/4"	1059	10	6,0	006770607	
<b>677/C800</b>	200÷800	20÷80	150÷600	3/4"	1319	10	6,7	006770612	
<b>677/C1000</b>	300÷1000	30÷100	200÷750	3/4"	1554	20	7,4	006770616	

## 605E

**Click-type torque wrenches with reversible ratchets for right-hand and left-hand tightening torque accuracy:  $\pm 6\%$**



UNI EN ISO 6789

1/4"

	Nm	kgfm	lbf.in	■	L (mm)		g		
<b>605E/5</b>	1÷5	0,1÷0,5	10÷45	1/4"	190	0,05	180	006050105	
<b>605E/10</b>	2÷10	0,2÷1,0	18÷90	1/4"	190	0,1	180	006050110	

## 680

### Electronic digital torque meter

For testing calibration

- For testing calibration of screwdrivers and torque wrenches, clockwise/anticlockwise operation
- Accuracy:  $\pm 1\%$  of read value
- Colour LCD display, 4 digits
- 3 units of measurement: Nm - lbf.ft. - lbf.in
- Operating modes: Click, Dial, Track
- Enables setting of 15 different control parameters
- With USB/Micro-USB cable for PC connection and data transmission
- Power supply with EU, UK, US & AU adaptors
- Software for issuing TEST REPORTS



680/350



680/2100



680/3

680/30



### 680/3

006800000

1,4 kg Nm 0,1÷3

1/4"

### 680/30

006800003

1,4 kg Nm 1,5÷30

10 mm

### 680/350

006800035

2,6 kg Nm 10÷350

12"

### 680/2100

006800210

3,5 kg Nm 200÷2100

27 mm



# 1150HPC

## Heavy duty universal pliers with cutting edges made of sintered steel

- The decentralized pin allows the fulcrum to be closer to the cutting point, thereby resulting in an improved lever effect.
- Perfect alignment of the nose and the thin profile allow the pliers to be used in very small areas.
- The body of the pliers is made of a reliable molybdenum steel which has been heat treated in order to be flexible and resistant so as to guarantee a safe grip in any moment.

100%  
MADE  
By  
Beta



### 1150HPC

011500618

Shearing stress - static test =	<b>-73%</b>
Average life of cutting edges = (test ISO 5744)	<b>+127%</b>
Hardness of M2 steel cutting edges =	<b>65HRC</b>



**PATENTED**  
**ABSOLUTELY**  
**GROUND BREAKING**  
**REMARKABLE CUTTING**  
**CAPACITY**

**THE DECENTRALIZED PIN ALLOWS THE FULCRUM TO BE CLOSER TO THE CUTTING POINT, THEREBY RESULTING IN AN IMPROVED LEVER EFFECT**

### 1169BM/D3

011690133

Set of 1 combination pliers,  
1 long needle nose pliers and  
1 diagonal cutting nippers



1082BM 160 mm

1150BM 180 mm

1166BM 160 mm

### 1169GBM/D2

011690272

Set of 1 combination pliers,  
and 1 diagonal cutting nippers,  
bi-material handles, industrial finishing

INDUSTRIAL  
FINISHING



1082GBM 160 mm

1150GBM 180 mm

### 1031/S4

010310000

Set of 4 circlip pliers



1032 180 mm  
● 19 ÷ 60 mm

1036 175 mm  
● 19 ÷ 60 mm

1038 175 mm  
● 19 ÷ 60 mm

1034 170 mm  
● 19 ÷ 60 mm

# 1048N



**SLIP JOINT PLIERS, BOXED JOINTS, OUTSTANDING GRIP AND AMAZING HANDLING**

**Slip joint pliers, slip-proof PVC coated handles**

**New tooth geometry for effective, safe grip on hexagonal and cylindrical profiles**



**Induction hardened teeth for longer durability**

**Up to eight adjustment options**

**Extraordinary handling and comfort thanks to the large contact surface of the handle**

**Wider head/handle angle for improved ergonomic handling**

## Other features:

- Triangular section grip for a more comfortable contact surface
- Tapered head allowing access to small spaces
- Case-hardened nail for improved wear resistance
- The handles coated with innovative slip-proof PVC ensure a secure grip.
- Phosphated finish
- Made from chrome-vanadium steel

**DIN ISO 8976**

## 1048N

	L mm	A Max mm	L1 mm	S mm	g	
<b>1048N 175</b>	175	36	31	11	189	010480910
<b>1048N 250</b>	250	46	38	13	354	010480915
<b>1048N 300</b>	300	60	44	14,8	554	010480920
<b>1048N 400</b>	400	96	81	19	1180	010480940

## 1048N/D3

**010480923**

**Set of 3 slip joint pliers**



## 1169N/D4

**011690024**

**Set of 1 heavy-duty combination pliers, 1 long needle nose pliers, 1 cutting nippers, chrome-plated, and 1 slip joint pliers with boxed joints, phosphated**



## 1048VN

**Slip joint pliers, boxed joints, with orange lacquered finish**



	L mm	A Max mm	L1 mm	S mm	g	
<b>1048VN 175</b>	175	36	31	11	189	010480111
<b>1048VN 250</b>	250	46	38	13	354	010480116
<b>1048VN 300</b>	300	60	44	14,8	554	010480121

## 1044N 250

**010440025**

**Slip joint pliers, phosphated, overlapping joint, non-slip PVC-coated handles**

L mm	A Max mm	L1 mm	S mm	g	
250	46	48	8,5	330	010440025





## 437P

004370003

**Thread dresser, for repairing internal and external, right-hand and left-hand threads**

- P 0,80-1,00-1,25-1,50-1,75-2,00-2,50-3,00 mm



230 mm

## 437U/09

004370550

**Assortment for repairing damaged threads in metal case**

M5X0,8  
M6X1,0  
M8X1,25  
M10X1,5  
M12X1,75



370x230x55 mm

## 412/SP25

004120425

**Set of twist drills with cylindrical shanks in case**

Ø 1÷13 x 0,5 mm

R ≤ 800 N/mm<sup>2</sup>  
HV ≈ 750÷820  
DIN 338



110x190x55 mm



130°



## 446/C110

004460060

**Assortment of 105 chrome-steel taps and dies, metric thread, and 5 accessories for car repair jobs in wooden case**

430 M mm	433 M mm	440/440A M mm	441/441A M mm
2x0,4	6x0,75 - 7x0,75	2x0,4	6x0,75 - 7x0,75
3x0,5	8x0,75 - 8x1	3x0,5	8x0,75 - 8x1
4x0,7	9x0,75 - 9x1	4x0,7	9x0,75 - 9x1
5x0,8	10x0,75 - 10x1	5x0,8	10x0,75 - 10x1
6x1	10x1,25 - 11x0,75	6x1	10x1,25 - 11x0,75
7x1	11x1 - 11x1,25	7x1	11x1 - 11x1,25
8x1,25	12x0,75 - 12x1	8x1,25	12x0,75 - 12x1
9x1,25	12x1,25 - 12x1,5	9x1,25	12x1,25 - 12x1,5
10x1,5	14x1 - 14x1,25	10x1,5	14x1 - 14x1,25
11x1,5	14x1,5 - 16x1	11x1,5	14x1,5 - 16x1
12x1,75	16x1,5 - 18x1,5	12x1,75	16x1,5 - 18x1,5
14x2		14x2	
16x2		16x2	





435/0 444/1 436/1  
435/3 444/2

500x337x60 mm

## 1599F

**Parallel bench vices, forged**

Fully steel cast. Milled and hardened jaw surface. Front opening. High clamping depth.



	L mm	BxH mm	Ø mm	A max mm	
1599F/100	100	92x46	11	125	015990100
1599F/125	125	108x54	13	150	015990125
1599F/150	150	125x62	13	200	015990150
1599F/175	175	140x70	15	220	015990175

## 1691MG

### Measuring tapes with fixed magnets

- Shock-resistant ABS casings
- Steel tapes
- Precision class: II

	L m	S m		
<b>1691MG/5</b>	5	25	016910405	
<b>1691MG/8</b>	8	25	016910408	
<b>1691MG/10</b>	10	25	016910410	




**MAGNETIC**

## 1650

### Sliding gauge made from hardened stainless steel

- Reading to 0.05 mm
- Spring locking

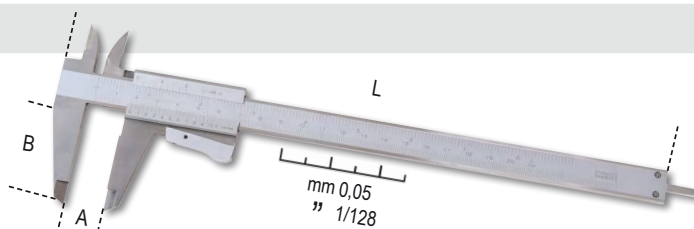

	A Max mm	L mm	B mm	G mm		
<b>1650/150</b>	150	235	40	0,05-1/128	016500001	
<b>1650/200</b>	200	290	49	0,05-1/128	016500002	

**DIN 862**

**UNI EN ISO 13385-1**



## 1651DGTB

### Digital vernier, reading to 0.01 mm

- Screw slider locking
- Mm/inch conversion
- Zero setting at any position
- Square depth rod up to 300 mm
- In hard plastic case




**DIN 862**

**UNI EN ISO 13385-1**



	A Max mm	L mm	B mm	G mm		
<b>1651DGTB 150</b>	150	235	40	0,01-0,0005	016510211	
<b>1651DGTB 200</b>	200	285	50	0,01-0,0005	016510212	
<b>1651DGTB 300</b>	300	400	60	0,01-0,0005	016510213	



## 1696T

### Spirit levels with magnetic base, made from profiled aluminium, with three unbreakable vials

- V-profiled base
- Precision: 0.5 mm/m
- Complete with vertical reading window



	L mm	H mm	S mm		
<b>1696T 600</b>	600	66	28	016960506	
<b>1696T 800</b>	800	66	28	016960508	
<b>1696T 1000</b>	1000	66	28	016960510	
<b>1696T 1200</b>	1200	66	28	016960512	





## 1760/RMS

017600020

**Industrial digital multimeter accurate and sturdy, in a 6-mm co-moulded shell, with antislip, shockproof outer rubber part**

- Water protection IP67
- Protection up to 1000V
- Tested for accidental falls up to 2 m
- Protected inlets
- Autoranging
- Large direct reading display, backlit, blue
- K type temperature probe (included)
- Self-power down
- Rubber terminal base for enhanced operating comfort
- Double insulated terminals, 1000V, 1 m long
- Supplied in a soft case
- CAT IV 600V/ CAT III 1000V
- Actual effective value TRUE RMS



IP67



	Measuring range	Base accuracy
AC/DC voltage	110mV – 600V $\pm 0.8\%$	- $\pm 2\%$ rdg
AC/DC current	110 $\mu$ A – 10A $\pm 1.5\%$	- $\pm 2\%$ rdg
Resistance	110 $\Omega$ – 40M $\Omega$ $\pm 1.2\%$	- $\pm 2.5\%$ rdg
Capacity	11nF – 40mF $\pm 5\%$	- $\pm 10\%$ rdg (up to 11mF)
Frequency	1100Hz – 110 MHz $\pm 1.2\%$	- $\pm 1.5\%$ rdg
Temperature	-32°C – +1000°C $\pm 3\%$	- $\pm 5\%$ rdg
Diode test	3V DC $\pm 10\%$ rdg	
Continuity test	<30 $\Omega$	

## 1760S

017600022

**Compact digital multimeter**

- IP40 protection
- Autoranging
- Large direct reading display, backlit, blue
- Self-power down
- Low battery indication
- Supplied in a soft case
- CAT III 600V
- TRUE RMS (actual effective value)



**Measurable parameters:**


DC voltage: 200 mV-2/20/200/600V  
 AC voltage: 100/600V  
 DC current: 200 mA-10 A  
 AC current: 0,01-10 A  
 Resistance: 200 $\Omega$  - 2/20/200 k $\Omega$  - 2 M $\Omega$   
 Diode test: 0.4  $\div$  0.7  
 Power supply: 2 1.5V batteries, type AAA

IP40



## 1370

**Mechanic's hammers**  
wooden shaft

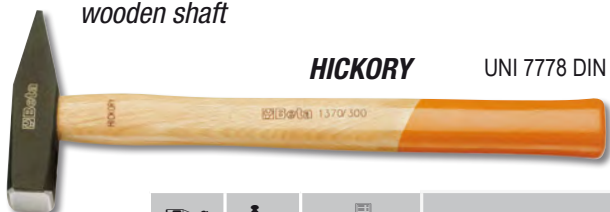

HICKORY

UNI 7778 DIN 1041

	g	g	
<b>1370/300</b>	300	439	013700053
<b>1370/500</b>	500	669	013700055
<b>1370/800</b>	800	949	013700058
<b>1370/1000</b>	1000	1180	013700060
<b>1370/1500</b>	1500	1722	013700065
<b>1370/2000</b>	2000	2181	013700070

## 1370T

**Mechanic's hammers**  
fibre shaft



	g	g	
<b>1370T/300</b>	300	452	013700630
<b>1370T/500</b>	500	663	013700650
<b>1370T/800</b>	800	1017	013700680
<b>1370T/1000</b>	1000	1279	013700700
<b>1370T/1500</b>	1500	1740	013700750

## 32AU

000320160

**Automatic centre punches**



Ø 3 mm

L 150 mm



## 1390

**Soft face hammers,**  
wooden shaft



UNI 7784

	Ø mm	g	
<b>1390/22</b>	22	134	013900022
<b>1390/28</b>	28	230	013900028
<b>1390/35</b>	35	365	013900035
<b>1390/45</b>	45	689	013900045
<b>1390/60</b>	60	1462	013900060

## 1547/C6

015470006

### Dummy ball bearing extractors

Bearings:


1547/1

6011-6014, 6206-6211, 6303-6308, 6403-6405

1547/2

6004-6010, 6200-6205, 6300-6304

- Quick, safe extraction



420x185x60 mm

## 1545/C5M

015450011

### Puller 1542/1 with 5 extractors 1544



265x180x45 mm

	A mm	C mm
1544/1	9÷12	0,80
1544/2	13÷17	1,15
1544/3	16÷21	1,70
1544/4	20÷25	1,65
1544/5	25÷30	2,00



## 1430/S5

014300105

### Set of 5 tapered extractors for broken screws and studs, made from hardened steel in case

1430/1-1430/2-1430/3  
1430/4-1430/5




## 1500N

### Universal pullers with 2 sliding legs

- Special leg design, for automatic leg locking under loading conditions.
- For both external and internal use
- Legs can be moved along crosspiece.

	A min÷max mm	L mm	L1 mm	● mm	A1		
<b>1500N/0</b>	18÷65	70	100	15	110	015000600	
<b>1500N/1</b>	23÷70	100	130	17	130	015000601	
<b>1500N/2</b>	23÷100	100	130	17	160	015000602	
<b>1500N/3</b>	35÷140	150	190	20	230	015000603	
<b>1500N/4</b>	35÷190	150	190	20	280	015000604	
<b>1500N/5</b>	43÷250	205	295	27	360	015000605	
<b>1500N/6</b>	43÷320	205	295	27	430	015000606	

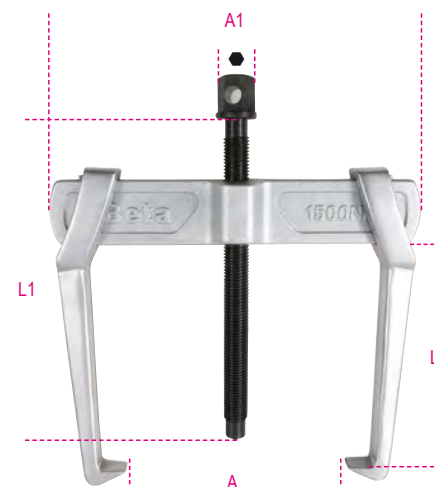



**332**

**Mini pipe cutter for copper and light alloy pipes**



	L mm	Ø mm "		
<b>332</b>	59	3÷16 1/8"÷5/8"	003320001	
<b>332/2</b>	63	3÷28 1/8"÷1"1/8"	003320003	

**342**

003420030

1,5 Kg

**Ratchet-type shears for plastic pipes**

IPX4

**376**

**Pipe wrenches, Swedish pattern, 90° flat jaws**



	L mm	Ø "	Ø mm		
<b>376 320</b>	320	1" gas	34	003760032	
<b>376 410</b>	410	1 1/2" gas	49	003760041	
<b>376 550</b>	550	2" gas	60	003760055	
<b>376 630</b>	630	3" gas	90	003760063	

**363**

**Heavy duty pipe wrenches made from light alloy**



	L mm	Ø "	Ø mm		
<b>363 350</b>	350	2" gas	60	003630035	
<b>363 450</b>	450	2 1/2" gas	76	003630045	
<b>363 600</b>	600	3" gas	90	003630060	
<b>363 900</b>	900	5" gas	140	003630090	
<b>363 1200</b>	1200	6" gas	165	003630120	

**345SB**

003450010

**Deburrer with revolving replacement blade**

- For copper, light alloy and PVC pipes.
- Supplied with 2 blades.



## WIRELESS RECHARGEABLE ((••))



Based on improved LED technology, longer battery life, shorter charging time, painstaking attention to materials and ongoing search for innovative solutions, Beta's work lamps mean an outstanding combination of design, functionality and performance.

The lighting family comprises a wide range of products designed to satisfy all users' requirements, ranging from inspecting small pipes to lighting large working areas.

A comprehensive range designed to allow professionals to work at their best, in any sector and under any condition.



### 1833XSW

018330011

#### LED inspection torch, wireless rechargeable

- Two brightness settings: LED SMD, 250 - 80 Lumen
- Rechargeable battery: 3.7V 700 mAh., 2.59 Wh Li-ion
- Two charging modes:
  - wireless base 1839BRW
  - power supply with USB-C port
- Charging time:
  - 2h with wireless charging base
  - 2h with power supply
- Battery life: 2-8h
- LED battery level indicator
- Magnets on base and back
- Belt clip
- USB-C cable included
- IP54
- IK07



L 145 mm



### 1833MW

018330013

#### High-brightness LED torch, wireless rechargeable

- Four brightness settings: LED SMD, 1000 - 400 - 30 - 5 Lumen
- Rechargeable battery: 3.7V 2600 mAh, 9.62 Wh Li-ion
- Two charging modes:
  - wireless base 1839BRW
  - power supply with USB-C port
- Charging time:
  - 6h with wireless charging base
  - 4h with power supply
- Battery life: 2-200h
- 3-LED battery level indicator
- Magnet on back
- USB-C cable included
- IP68
- IK07



L 160 mm





# WIRELESS RECHARGEABLE

## 1838SW

018380142

### Rechargeable, articulated LED inspection lamp and wireless charging

- Rechargeable 3.6V 3.350mAh Li-ion battery
- 2 charging modes:
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 6.5h with wireless charging base
  - 4.5h with power supply
- Battery life: - front: 3-5h
  - spot (head): 7h
- 3-LED battery level indicator
- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- Magnets on base and back
- IP65
- IK07



- **Dual light emission:**
  - front: LED COB, 3 light intensities: 250 - 500 - 1000 lumens
  - spot (head): LED SMD, 200 lumens



## 1836AW

018360051

### Rechargeable wireless LED headlamp, dual brightness

Rechargeable battery: Li-Ion 3.7 V, 1500 mAh, 5.55 Wh

- USB-C port
- Supplied with USB-C cable
- Charging time:
  - 2.5 h with power supply
  - 4.5h with wireless charging base
- Battery life:
  - front: 4-18 h
  - head (spotlight): 4 h
- IP 65
- IK 07



- **Dual light emission:**
  - front: 3 light intensities, LED COB, 30 - 200 - 400 lumens
  - head (spotlight): LED COB, 400 lumens



## 1838POCKET

018380080

### Articulated pocket LED spotlight, with dual light beam and wireless charging

- Rechargeable 3.7V 2600mAh Li-ion battery
- 2 charging modes:
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 4.5 h with wireless charging base
  - 4 h with power supply
- Battery life: - main light: 3-9h
  - spot light: 4.5 h
- 3-LED battery level indicator
- Can be rotated 210°
- Nonslip rubber body
- Magnetic base
- 1 magnet on base
- Supplied with a USB-C cable
- IP65
- IK07



- **Dual light emission:**
  - main light: LED COB, 3 light intensities: 160 - 400 - 800 lumens
  - spot light: LED SMD, 250 lumens
- **Lighting angle:**
  - main light: 160°
  - spot light: 18°



## WIRELESS RECHARGEABLE ((••))

### 1839BRW

018390002

**Wireless charging base, compatible with 1838POCKET, 1838SW, 1836AW, 1833XSW, 1833MW inspection lamps**

- Two charging positions with magnetic connection, for simultaneous use
- With pull-out support for wireless mobile phone charging
- Charging status LED indicator
- Max. input: 10W x2
- Input: AC 100-240V 50/60Hz
- Output: DC 12V 1.5A  
DC 9V 2A  
DC 5V 3A
- USB-C port
- IP20
- IK07



- Can be hung on wall through:  
3 strong magnets on back  
2 screw holes



## KIT WIRELESS ((••))

The kit comprises products performing different functions. What is more, wireless technology makes it possible to do away with cables, which results in a more convenient and tidier charging base.

Wireless technology means one of the latest innovations for work lighting and allows one's instruments to be easily charged.



### 1839W/K1

018390810

**Kit of wireless lamps 1838SW and 1838POCKET, with compatible charging base 1839BRW**

- wireless rechargeable, articulated LED inspection lamp 1838SW
- wireless rechargeable, articulated pocket LED spotlight 1838POCKET
- wireless charging base 1839BRW, compatible with the lamps of the kit

### 1839W/K2

018390820

**Kit of wireless lamps 1838SW and 1836AW, with charging base 1839BRW**

- wireless rechargeable, articulated LED inspection lamp 1838SW
- wireless rechargeable LED headlamp 1836AW
- wireless charging base 1839BRW, compatible with the lamps of the kit





## 1833

**High-brightness LED torch,  
made of sturdy anodized aluminium**

- Adjustable focus
- 2 brightness settings



**Battery life 10.0 h - L 150 mm**

### 1833 S

018330002



**Battery life 7.5 h - L 162 mm**

### 1833 M


018330003

## 1837C



**Rechargeable LED spotlight  
for building yards**

- 3 brightness settings
- battery charger:  
input: 100-240V AC - 50/60Hz;  
output: 15V 1.5A
- charging time: 4 hours
- 3-LED charge indicator
- can rotate up to 180°
- IP65
- IK07

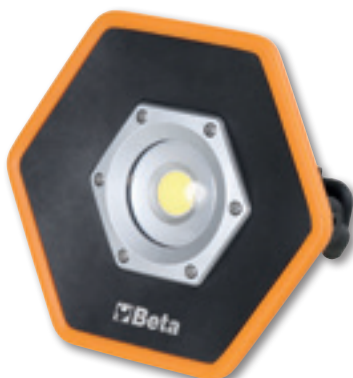

220x225x70 mm **500/1000/2100 lumen**

### 1837C/2100

018370210



266x236,6x59 mm **1100/2100/4300 lumen**

### 1837C/4300

018370430

## 1837S

018370500

**Telescoping tripod for  
worklight**

- Made of metal
- Adjustable height: 70÷155 cm
- Compatible with items  
1837C and 1838FLASH





## 1838FLASH

018380300

**Rechargeable, ultracompact  
spotlight, designed to offer the best  
possible solution for each use**



- IP65 - without external  
power supply
- Dual brightness: 300/650 lumens
- Lithium polymer  
battery 7.4 V 4000 mAh



## 1838/11LED

018380111



**Rechargeable inspection lamp  
with ultra-high brightness LEDs,  
lithium polymer battery**

- Compact body made of antislip rubber
- With charging station, 110-230Vac



With head LED



With  
multidirectional  
head LED



Swinging hook



**1838PN**
**NEW!**

018380008


**Rechargeable LED pen light**

- Dual light emission: main and spot
- 3 light intensities:  
main COB LED 350 - 175 lumens  
spot: SMD LED 120 lumens
- Rechargeable battery: Li-Ion 3.7 V, 1600 mAh
- Charging time: 2.5h
- Battery life:  
main: 6/3h  
spot: 6h
- Magnetic base
- Belt clip/magnetic pocket
- IP65
- IK07
- USB-C cable included



175x23x38 mm


**1838COMPACT**
**NEW!**

018380011



60,8x26x120 mm

**Rechargeable, compact LED lamp**

- Dual light emission: main and spot
- 3 light intensities:  
main COB LED 300 - 120 lumens  
spot SMD LED 150 lumens
- Rechargeable battery: Li-Ion 3.7 V, 1500 mAh
- Charging time: 2.5h
- Battery life:  
main: 7/3.5h  
spot: 6h
- Can be hung, with nonslip, shockproof rubber body
- Hook can be rotated 360°
- Magnetic base can be rotated 180°
- Belt clip/pocket
- IP65
- IK07
- USB-C cable included


**1838SLIM**

018380221

**Rechargeable, articulated slim 3-LED inspection lamp**

- Magnetic base
- Charging time: 2.5h
- Battery life: 2-4h/ spot 3h

**Triple light emission**

- front: 100/200 lumens
- back: 180 lumens
- spot (head): 80 lumens




L 307 mm


**1838AM**

018380400

**Rechargeable LED inspection lamp, with double light emission, articulated, can be rotated 180°, with swivel magnetic base and hook**

- **Double light emission:**  
front: LED COB, 60-700 lumens, can be adjusted with potentiometer spot (head): LED SMD, 120 lumens, ON-OFF switch
- Rechargeable 3.6V 2600mAh Li-ion battery
- With USB-C port
- Supplied with 100-240V / 50-60Hz charger
- Charging time: 4h
- Battery life: front: 2.5-16h  
spot (head): 10h
- 3-LED battery level indicator
- Magnetic base (with neodymium magnet), can be rotated 90°
- Swivel base hook
- IP54
- IK07



- Articulated, can be rotated 180° (± 90° compared to axis)



L 405 mm





**1741TR**

017410410

**NEW!**

**Riveting pliers with rotating head, supplied with 4 interchangeable nozzles**

Ø mm	2,4	3,2	4	4,8
Aluminium	•	•	•	•
Steel	•	•	•	
Stainless steel	•	•	•	

**L 285 mm****1741**

017410003

**Riveting pliers with 4 interchangeable nozzles**

Compact and lightweight, it stands out as particularly versatile, based on the four interchangeable nozzles for rivets made from aluminium and steel (2.4 - 5 mm) and stainless steel (2.4 - 4 mm).

Ø mm	2,4	3,2	4	4,8	5
Aluminium	•	•	•	•	•
Steel	•	•	•	•	•
Stainless steel	•	•	•		

**L 260 mm****1741P**

017410303

**Heavy-duty riveting pliers supplied with 4 interchangeable nozzles**

Ø mm	2,4	3,2	4	4,8	5
Aluminium	•	•	•	•	•
Steel	•	•	•	•	•
Stainless steel	•	•	•	•	•

**L 260 mm****1741U**

017410450

**Ultra compact riveting pliers with adjustable force with 4 interchangeable nozzles**

Ø mm	2,4	3	3,2	4	4,8
Aluminium	•	•	•	•	•
Steel	•	•	•	•	•
Stainless steel	•	•	•	•	



**3 JAWS:  
IMPROVED  
RIVET GRIP**

**L 200 mm**


# ELECTRICAL TOOLS

BM Group has been designing, manufacturing and distributing connecting parts and electrical installation products since 1958.

Quality, safety and reliability have always been BM's key values. Combined with a passion for excellence, these values have allowed the company to develop – step by step – into a benchmark for the electrical material market.

In 2018 BM Group was taken over by Beta Utensili.

This section comprises an accurate selection of products under the brand name BM, supplementing Beta's product range.

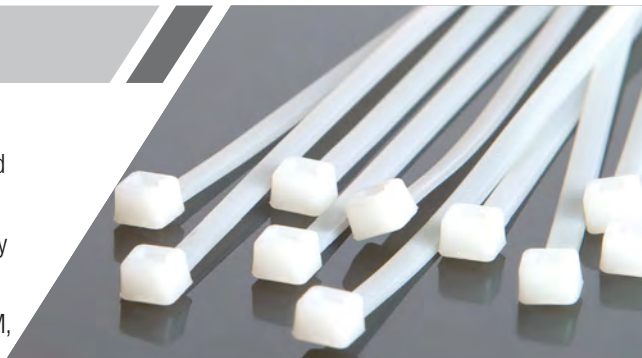
**1608/C9**

016080045

2 kg

**Pliers with assortment of 450 terminals**


420x185x60 mm

**1748-N**

BM1100

**Fitting tools for nylon cable ties,  
2.5 to 4.8 mm in width**

- Automatic cutting when set tension is reached.
- With tightening tension adjustment system.

- Materials: glass frame made from polymer and fibreglass, interior parts made from metal



max 4,8 mm

**1609B**

016090101

**Mechanical crimping pliers**

- For noninsulated copper terminals, 10÷120 mm<sup>2</sup>
- Antislip rubber handle
- Internal "H" section pin for unparalleled punch smoothness
- Made from burnished steel


10÷120 mm<sup>2</sup>

**1149F**

011490010

**Front wire stripping pliers with cutting blade, self-adjusting**

- Self-adjustment to wire diameters
- Adjustable stripping length
- Insulating cutting pressure adjustment
- Built-in cutting device

0,2÷6 mm<sup>2</sup>

**1606T**

016060005

**Crimping pliers for tubular terminals,  
4-sided crimping**

Reduced lever stress





**1128FX**

011280090

**Electrician's scissors, straight stainless steel blades, with microteeth, cable cutting groove and crimping pliers for tube terminals**

- Articulated belt hook case
- Bimaterial handles
- Anti-loose pin

**1128BMX**

011280051

**Electrician's scissors, straight stainless steel blades, with microteeth**

- Straight stainless steel blades
- Wire cutting groove
- Microteeth on one side

**1128BAX**

011280088

**Double-acting electricians' scissors, with milling profiles in DLC-coated stainless steel**

- High blade surface hardness (resistance to abrasion and wear)
- Low coefficient of friction (smoothness and anti-adherence)
- With articulated plastic case

**+HARDNESS  
-COEFFICIENT  
OF FRICTION**



**Profile and mill:**  
designed to enlarge  
holes on plastic,  
from 13 to 25 mm.

**1771BM**

017710050

**Utility knife, 18 mm, 6 spare blades**

- Nonslip bi-material handle
- Automatic blade loading
- Blade locking nut for maximum blade stability under stress conditions
- Nonreturn safety slider
- Automatic blade loading

**1778SOS**

017780080

**Car service knife with window breaking hammer and seat belt cutter features in case.**

- With clip and fabric wallet with loop
- Anodized aluminium handle
- Safety blade lock

**1772M**

017720040

**Safety utility knife with retractable blade, supplied with 3 blades**

- Blade retracts through an automatic spring mechanism
- Die-cast alloy body
- Staple remover built into handle



# 1778MT MULTIPURPOSE TOOL COMPLETE WITH BITS AND SHEATH



BETA's multipurpose tool stands out from similar commercially available tools with BETA's typical hallmarks: pliers synonymous with matchless quality, sophisticated materials and state-of-the-art technology. The 11 bits, which come in the most popular geometries in the market, make this item ideal for any work environments and conditions, e.g. camping, nautical industry, hunting and DIY.

**1778MT**

017780055

**Multi-tools complete  
with bits and sheath**


**9 tools for a total  
of 22 functions:**

- Combination pliers
- Large blade
- Corrugated blade
- Hacksaw frame
- File
- Tin/Bottle opener
- Scissors
- Bit holder
- Screwdriver for cross head Phillips® screws

**SUITABLE  
FOR EVERY  
SITUATION!**



**Easy pull-out  
of tools**



**Tool unlock  
buttons**



**COMPACT  
AND VERSATILE!**



**11 bits + socket + tweezers**



**Ruler 100 mm + Ruler, 4"**

**1777BMT**

017770050


**Foldaway knife with trapezoidal blade**

- 4 adjustable blade depths  
4; 9.5; 15.5; 21.5 mm
- String cutting groove
- Supplied with 3 blades


**1726BM**

017260050

**Hacksaw frame with quick release  
blade attachment system**

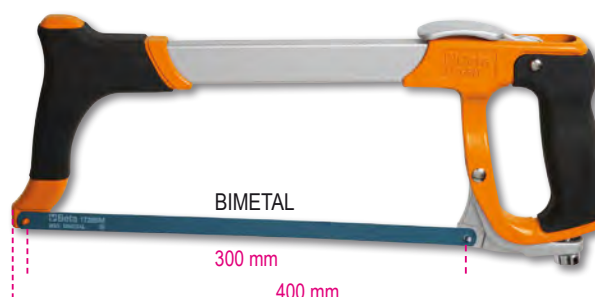



**1750KG10**

017500100

10 Kg

**Lever-operated grease gun, 10 kg,  
with high-pressure hose, 2 m**

- Complete with swivel fitting, to avoid choking hose
- Die-cast aluminium pump body with check valve

### 3 DIFFERENT PRESSURE LEVELS AVAILABLE:

- 4 g at 275 bar
- 7 g at 206 bar
- 9 g at 137 bar

**1750**

017500500

**Lever operated grease guns,  
500 cc**

**550 BAR**

**1749A**

017490010

**Bonding gun, professional model  
aluminium tube**

**1749AC**


017490005

**High thrust gun for chemical binders**



# THE RANGE OF REELS

Beta's wide, complete range of reels has been designed and developed to satisfy all professionals' requirements. High-resistance spring ensuring remarkable durability and fluidity in use. Shells made of thick polypropylene, for unique shock resistance. Rack device causing automatic cable rewind to stop, easy to disable, to allow continuous traction. Each reel is fitted with a 180° swivel wall-mount bracket and an additional bracket for quick connection and disconnection from the wall-mount support.

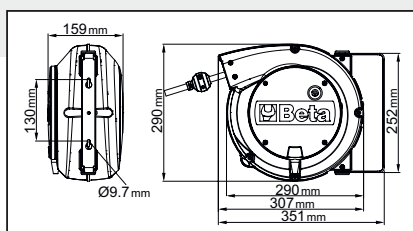

## CABLE REEL

- Length of cable out of shell: 1 m
- Rack mechanism can be disabled to keep cable in traction
- Coiled cable length: 15 m



### 1842 15-H05/LED

018420821

**Automatic cable reel with LED inspection lamp, 100-240Vac**

- With 230/12V safety transformer
- H05VV-F 2x1.0 mm<sup>2</sup> cable



### 1844 15-H05

018440315

**Automatic cable reel, with 3Gx1.5 mm<sup>2</sup> cable**

- 3Gx1.5 mm<sup>2</sup> cable
- With thermal protection switch
- Max. power (rolled up): 1500W (230V-20°C)
- Max. power (unrolled): 2500W (230V-20°C)



### 1844 15-H05/SCK

018440316

**Automatic cable reel, with 3Gx1.5 mm<sup>2</sup> cable and SCHUKO type socket and plug**

- 3Gx1.5 mm<sup>2</sup> cable
- With thermal protection switch
- Max. power (rolled up): 1500W (230V-20°C)
- Max. power (unrolled): 2500W (230V-20°C)



### 1845 15-H07



018450367

**Automatic cable reel, with 3Gx2.5 mm<sup>2</sup> cable**

- 3Gx2.5 mm<sup>2</sup> cable
- With thermal protection switch
- Max. power (rolled up): 2000W (230V-20°C)
- Max. power (unrolled): 3000W (230V-20°C)






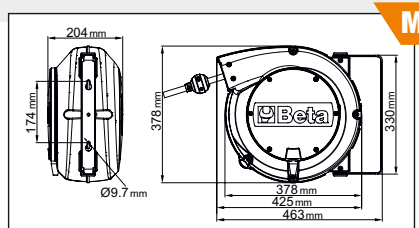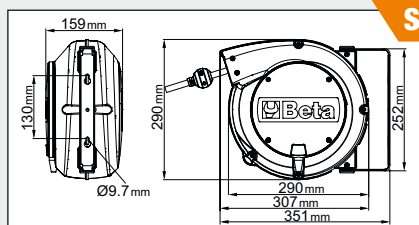

## HOSE REEL

- Max. operating pressure: 15 bar
- Braided polyurethane hose
- Operating temperature range: -5 °C / +50 °C

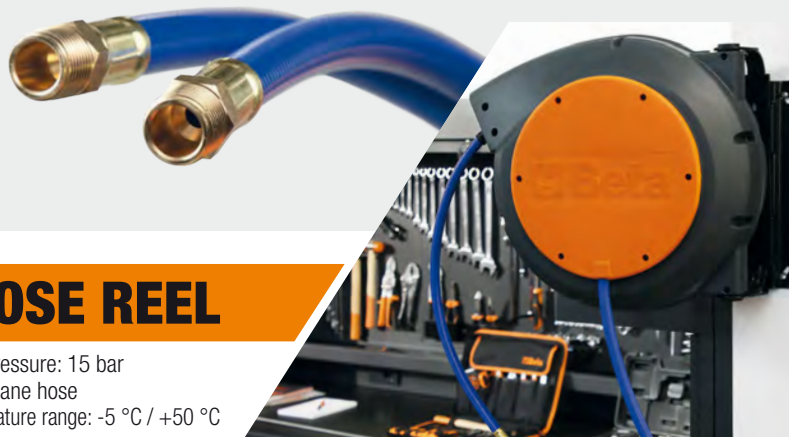

### 1900S 8X10

019000080

Automatic hose reel, shockproof plastic body, for air or water

Ø GAS BSP 1/4"



### 1900M 8X15

019000085

Automatic hose reel, shockproof plastic body, for air or water  
Ø 8x12 mm da 15 m

Ø GAS BSP 1/4"



### 1900M 10X15

019000115

Automatic hose reel, shockproof plastic body, for air or water  
Ø 10x14 mm da 15 m

Ø GAS BSP 3/8"



### 1900M 12X15

019000125

Automatic hose reel, shockproof plastic body, for air or water  
Ø 12x16 mm da 15 m

Ø GAS BSP 1/2"



**NEW!**

# POWER TOOLS

**Beta**  
POWERTOOLS

Let us introduce our range, Beta Power Tools, which comprises reliable, durable work instruments designed to satisfy every professional's requirements.

Beta's family of power tools comprises:

- **BATTERY TOOLS**
- **CORDED TOOLS**

The 20V line comprises battery tools synonymous with:

**High performance, Construction quality, Reliability, Durability**

The new range of battery tools includes 20V and 12V high-performance machines.

We at Beta relied on these hallmarks

to develop a comprehensive line of battery tools, ranging from the high-torque impact drill to the impact wrench with ½" square drive. All of Beta's new power tools are equipped with brushless motors and first-rate interior mechanisms, for significantly improved performance and durability of the tool.

The impact wrench with a maximum unscrewing torque of 1200 Nm is no doubt the flagship power tool of the new range, an ideal work partner for anybody who needs unparalleled power and performance.



## 1972/K12V-10

019720112

### Ultracompact drill, 12V

**Ultracompact:** no more than 170 mm in length;  
**ultralightweight:** no more than 1.1 kg, with battery, and perfectly balanced

- Double mechanical speed with steel gears and 20-position clutch
- Torque up to 30 Nm and 1300 rpm (400 rpm in 1st gear); drills diameters up to 10 mm in steel and 20 mm in wood
- 2Ah batteries and charge indicator on drill body
- Ergonomic nonslip handle
- Front LED
- 10-mm autochuck
- Belt clip (right/left side)
- Selector switch, screwing-unscrewing-locking modes (for transportation)
- Supplied in a hard case with 2 lithium ion batteries (2 Ah) and quick charger (50 min)



## 1986/K20-4AH+2AH

019860022



### Angle grinder kit, 20V, BRUSHLESS

**Main features:**

- Protection against accidental restart
- Additional handle, can be placed on both sides
- Tool-less disc cover (quick release)
- Spindle lock device for quick disc changes
- Lock on/off slide switch
- Air vents protected against dust infiltration and providing optimal cooling
- Supplied in a hard case with 2 4 Ah lithium ion batteries and a quick charger

**INCLUDED IN PRICE,**  
additional 2 Ah battery  
1994B 20V-2AH



## 1986/20V-125BMC

019860025

### Angle grinder, 20V BRUSHLESS, (machine body)

**Digital BRUSHLESS motor for increased power, reduced energy consumption, extended motor service life, improved power supply from button.**

- Protection against accidental restart
- Additional handle, can be placed on both sides
- Tool-less disc cover (quick release)
- Spindle lock device for quick disc changes
- Lock on/off slide switch
- Air vents protected against dust infiltration and providing optimal cooling
- Supplied in a hard case, without batteries and charger





# POWER TOOLS




Digital BRUSHLESS motor,  
for significantly improved performance: increased power,  
reduced energy consumption, extended motor service life, improved power supply from button.  
**ADDITIONAL SIDE HANDLE,**  
for high-torque operation

## 1984/K600-4AH+2AH

019840022

- 3 different torque settings and rpms in screwing mode
- Up to **600 Nm** unscrewing torque



## 1984/K1200-6AH+4AH

019840032

- 3 different torque settings and rpms in screwing mode
- Up to **1200 Nm** unscrewing torque



## 1989RCB

019890020

### Construction site radio, 20V

Multifunctional audio entertainment: digital (DAB; BT) and conventional FM radio.

Suitable for use at construction sites or for leisure.

- Sturdy radio with compact, modern, design, degree of protection IP54
- Powerful stereo sound provided by two powerful 16W side loudspeakers
- Built-in alarm function
- Complete with carrying handle and shockproof corner protection
- With AUX connection and protected USB connector for phone connection and charge
- Can be used with Beta's 20V batteries (optional) or power supply cord (included).



### INCLUDED:



### Features:

- FM radio frequency range: 87.5 – 108 MHz
- DAB radio frequency range: 174 – 240 MHz
- Number of FM and DAB stored stations: 30

## C04TSS/7


024003077

63 kg



### Mobile roller cab with 7 drawers

made of stainless steel

- 7 drawers (570 x 410 mm) with ball bearing slides.
- 4 castors Ø 125 mm  
2 fixed and 2 steering (two with brakes)
- Front centralized lock
- Frame made entirely of stainless steel AISI 304
- Castors, supports, ball bearings, drawer interiors and guides made of stainless steel
- Drawer handles made of aluminium



h	max
83 mm	25 kg
170 mm	30 kg



### NON-MARKING WHEELS

## C20TSS

021203001

4 kg

### Five-section cantilever tool box, made of AISI 304 stainless steel

It can be used in critical environments that is, in areas where the minimum contamination level is not permitted resistant to rust and the main acids, and can be autoclave sterilized at 121°.



450x200x210 mm

## 42INOX/SC9

000420387

### Set of 9 combination wrenches made of stainless steel with compact support

Compact support

8-10-11-12-13-14-15-17-19 mm



## 96TINOX/S8

000961954



### Set of 8 offset hexagon key wrenches, with high torque handles, made of stainless steel

2,5-3-4-5-6-7-8-10 mm



## 1293INOX/D8

012930408

### Screwdriver set made of stainless steel

5x



1290INOX 0,4x2,5x50-0,5x3x75  
0,8x4x100-1,0x5,5x150  
1,2x6,5x150 mm

3x



1292INOX PH0x60-PH1x80  
PH2x100 mm



## 1273MQ/D6

012730851

### Set of 6 screwdrivers

1274MQ 3x100-4x100-5,5x125 mm  
1272MQ PH0x60-PH1x80-PH2x100 mm

EN 60900



1000 V



## 1997MQ/GM

NEW!

### Composite insulating gloves

1000 V

EN 60903  
EN 61482


	Gr.		
1997MQ/GM 9	9	019970109	
1997MQ/GM 10	10	019970110	

## 1760PT/N

017600155

NEW!

### Voltage and continuity tester, 1000 V

Voltage and continuity tester: accuracy and reliability with up to 1000V power. Equipped with a high-visibility digital screen and a convenient self-test function, the tool ensures both accuracy and reliability in each measurement, which makes it a must-have for every professional.

#### Features

- Voltage: 24÷1000VAC / 6÷1000VDC
- Bar voltage indicator: 6-12-24-50-120-230-400-690-1000
- Accuracy: ± (3% + 3V)
- Response time: < 1s (09%)
- Maximum absorbed current @1000V: < 3,5mA
- Contact-free voltage detection: > 90VAC
- Phase rotation test: 100÷1000VAC (50/60Hz)
- Phase angle: 120° ±5°
- Continuity test: 0±1.3 MΩ
- Current (continuity test): ≤5 μA
- Pollution level
- Power supply



## 1760OHM/2

017600027

NEW!

### Megohmmeter for high voltage insulating testing

Our megohmmeter is synonymous with technology and accuracy for really professional measurements. With an insulating capacity up to 100 GΩ at 1000V voltage, this instrument is ideal for professional, accurate measurements in all electrical applications. Particularly suitable for electric and hybrid cars

#### Features:

- Insulation test up to 100 GΩ with 1000V voltage
- Large direct reading display, backlit
- Water protection: IP67
- Rubber terminal base for enhanced operating comfort
- Double insulated terminals CAT IV 600V, CAT III 1000V
- Ideal for electric and hybrid cars



	Measuring range	Basic accuracy
AC voltage:	10V - 600V	±(1.5% +5)
DC voltage:	0V - ±600V	±(1.5% +5)
Resistance:	0.01Ω - 200Ω	±(2% +5)
Insulation test @1000V:	0.01Ω - 100GΩ	±(1.5% +5)
Frequency	1~1KHz	±(0.1% +3)

## 2115PL-MQ32

021150332

5,2 kg

### Assortment of 32 insulated tools for hybrid cars, in plastic tool box with soft thermoformed tray

#### Quantity/Description

- 1 1/2" reversible ratchet
- 2 single ring wrenches 10-12 mm
- 1 magnetic bit holder, insulated 1/4"
- 10 set of 10 bits with magnetic bit holder
- 7 hexagon sockets 8-10-12-13-14-17-19 mm
- 1 1/2" square drive extension bar 125mm
- 1 1/2" square drive extension bar 250mm
- 1 slip joint pliers, boxed joint 250mm
- 1 combination pliers 1000V 180mm
- 1 extra-long bent flat nose pliers 160mm
- 2 screwdrivers for cross head Phillips® screws, 1000V 4.5X80-6X100mm
- 3 screwdrivers for headless slotted screws, 1000V 3X100-4X100-5.5X125
- 1 insulating gloves, made from latex G2
- 1 tool box, long series, made from plastic

Beta N.  
920MQ/55A  
89MQ  
850MQ  
861TX/A10  
920MQ/A  
920MQ/21  
920MQ/22  
1048MQ  
1150MQ  
1164MQ  
1272MQ  
1274MQ  
1997MQ/GM  
CP15L



12"

1000 V

## 2029EM

020290300

**Tool case with assortments of 43 maintenance and repair tools for hybrid and electric vehicles**

Quantity/Description	Beta N.
13 single open end wrenches, 1000V 7-8-9-10-11-12-13-14-15-16-17-19-22 mm	52MQ
7 bi-hex sockets $\odot$ 6-7-10-12-13-17-19 mm	910MQ/B
3 socket drivers for Torx® head screws $\odot$ TX25-TX30-TX40	910MQ/TX
1 3/8" drive reversible ratchet	910MQ/55
1 slip joint pliers, boxed joint 250 mm	1048MQ
1 diagonal cutting nippers 1000V $\leq$ 160 mm	1082MQ
1 electrician's scissors 145 mm	1128MQ
1 combination pliers 1000V $\equiv$ 180 mm	1150MQ
1 extra long flat nose pliers $\equiv$ 160 mm	1162MQ
2 screwdrivers for cross head Phillips® screws, 1000V $\odot$ PH1 - PH2	1272MQ
5 screwdrivers for headless slotted screws, 1000V $\bullet$ 2,5x75 - 3x100 - 4x100 - 5,5x125 - 6,5x150 mm	1274MQ
1 combination voltage and continuity tester	1760PT
1 cable stripping knife, insulated 190 mm	1777MQ/U
1 composite insulating gloves GM 10	1996MQ/GM
2 aluminium warning signs A1 - A2	7109A
2 prohibition signs D2 - D3	7109D



480x227x408 mm

Beta  
e-mobility

3/8"

1000 V



## 2400 RSC24/6-DEM

024004016

**Mobile roller cab with 6 drawers and assortment of 81 repair and maintenance tools for hybrid and electric vehicles**




Quantity/Description	Beta N.	TR
1 insulating mat	1995MQ/T	
4 plastic posts with fillable bases	7104 90	
1 multimeter/megohmmeter for high voltage insulation testing	1760/OHM	
1 combination voltage and continuity tester, 12-690V AC/DC	1760PT	
1 spare leads for digital multimeters and amperometric clamps	1760DGT-R3	
1 composite insulating gloves	1996MQ/GM	
1 plastic barrier chain	7105 6	
2 aluminium warning signs	7109A	
2 prohibition signs	7109D	
12 single open end wrenches, 1000V 7-8-10-11-12-13-14-15-16-17-19-22 mm	52MQ	M49
12 single ring wrenches 7-8-10-11-12-13-14-15-16-17-19-22 mm	89MQ	M49
4 socket drivers for hexagon screws $\odot$ 4-5-6-8 mm	910MQ/PE	M108
11 bi-hex sockets $\odot$ 7-8-10-11-12-13-14-15-16-17-19 mm	910MQ/B	M108
6 socket drivers for Torx® head screws $\odot$ T15-T20-T25-T27-T30-T40	910MQ/TX	M108
2 socket drivers with XZN® profile $\odot$ 8-10 mm	910MQ/XZN	M108
1 3/8" drive extension 125 mm	910MQ/21	M108
1 3/8" drive extension 250 mm	910MQ/22	M108
1 3/8" drive, T-handle	910MQ/T	M108
1 3/8" drive reversible ratchet	910MQ/55	M108
1 electrician's scissors	1128MQ	M161
1 slip joint pliers, boxed joint 250 mm	1048MQ	M161
1 diagonal cutting nippers 1000V $\leq$ 160 mm	1082MQ	M161
1 combination pliers 1000V $\equiv$ 180 mm	1150MQ	M161
1 extra long flat nose pliers $\equiv$ 160 mm	1162MQ	M161
1 extra-long bent flat nose pliers $\equiv$ 160 mm	1164MQ	M161
4 screwdrivers for cross head Phillips® screws, 1000V $\odot$ PH0x60 - PH1x80 - PH2x100 - PH3x150 mm	1272MQ	M161
4 screwdrivers for headless slotted screws, 1000V $\bullet$ 2,5x75 - 3x100 - 4x100 - 5,5x125 mm	1274MQ	M161
1 cable stripping knife, insulated	1777MQ/U	M161



1000 V

Beta  
e-mobility

RSC24/6-R 6

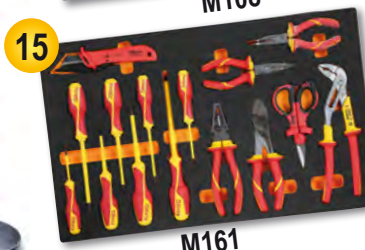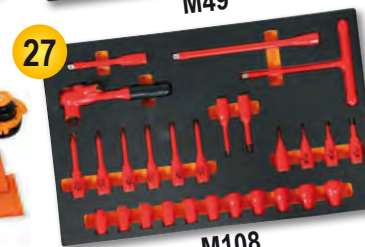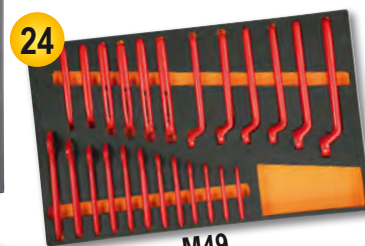



# BATTERY CHARGERS

**NEW!**


Since 2022 the established, authoritative welding specialist, Helvi, and Beta Utensili have been working together to develop ground-breaking technologies. This joint effort has translated into the new range of Beta by Helvi welding machines, which boast ultimate performance in line with its high quality standards.

Easy-to-use inverter welding machines with excellent welding characteristics for all types of electrodes. With overvoltage and overtemperature control and electrode anti-sticking function. Compact and lightweight, ideal for home maintenance jobs, light carpentry and maintenance jobs.


**1498/PR**
**NEW!**

## Semiprofessional battery

- For lead-acid storage batteries
- Voltage/current selectors
- Ammeter
- Automatic thermal overload protector
- Reverse polarity protector


**1498/PR14**
**NEW!**

014980730

Conventional battery charger, 6/12 V

**1498/PR17**
**NEW!**

014980731

Conventional battery charger, 12/24 V

**1498/PR20**
**NEW!**

014980732

Conventional battery charger, 12/24 V

**1498/PR14 1498/PR17 1498/PR20**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	140 W	300 W	390 W
Voltage	6/12 V	12/24 V	12/24 V
Maximum current	11 A	12,5 A	16 A
Charging current	7,5 A	8,5 A	11 A
Charging capacity	112 Ah 15h	128 Ah 15h	165 Ah 15h
Charging positions	2	2	2

**1498/PR25**

014980733

Conventional battery charger, 6/12/24 V

**NEW!**


- For large charging stations
- For lead-acid storage batteries
- Voltage/current selectors
- Ammeter
- Automatic thermal protector

**1498/PR35B**

014980734

Conventional battery charger, 6/12/24/36/48 V

**NEW!**
**1498/PR25 1498/PR35B**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	620 W	1830 W
Voltage	6/12/24 V	6/12/24/36/48 V
Maximum current	25 A	38 A
Charging current	17 A	25A
Charging capacity	255 Ah 15h	375 Ah 15h
Charging positions	6	12

**1498/AM30**

014980740

**NEW!****Automatic conventional battery charger 12/24 V**

- For AGM, GEL, Lead-Acid and Start/Stop batteries
- Electronic control of charging current
- Charging status light indicators
- Charging current regulation via potentiometer
- Automatic charging function
- Maintenance function



Power supply (1ph)	230 V - 50/60 Hz
Power	720 W
Voltage	12/24 V
Maximum current	30 A
Charging current	20 A
Charging capacity	300 Ah 15h
Charging positions	∞

**1498/SP****NEW!****Conventional battery charger / starter, 12 V**

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector

**1498/SP150**

014980745

**NEW!****Conventional battery charger, 12 V****1498/SP250**

014980746

**NEW!****Conventional battery charger, 12/24 V****1498/SP150 1498/SP250**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	190 W	650 W
Voltage	12 V	12/24 V
Maximum current	15 A	27 A
Charging current	11 A	18 A
Max. boost current	120 Acc	200 A
Starting current	85 A	135 A
Charging capacity	165 Ah 15h	270 Ah 15h
Charging positions	2 + boost	2 + boost

**1498/SC****NEW!****Battery charger / starter, 12/24 V, wheeled**

- For lead-acid storage batteries
- Slow/fast charging current selector
- Ammeter
- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector

**1498/SC341**

014980755

**1498/SC540**

014980757

**1498/SC441**

014980756

**1498/SC640**

014980758

**1498/SC341 1498/SC441 1498/SC540 1498/SC640**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	1080 W	1320 W	1440 W	1800 W
Voltage	12/24 V	12/24 V	12 V	12/24 V
Maximum current	45 A	55 A	60 A	75 A
Charging current	30 A	36 A	40 A	50 A
Max. boost current	340 Acc	380 Acc	480 Acc	550 Acc
Charging capacity	375 Ah 15h	450 Ah 15h	525 Ah 15h	600ww Ah 15h
Charging positions	3 + boost	3 + boost	6 + boost	6 + boost



**1498/RP****NEW!****Conventional battery charger / starter, 12/24 V**

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector

**1498/RP380****NEW!**

014980750

**1498/RP480****NEW!**

014980751

**1498/RP380 1498/RP480**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	900 W	1320 W
Voltage	12/24 V	12/24 V
Maximum current	38 A	55 A
Charging current	25 A	36 A
Max. boost current	280 Acc	450 A
Starting current	200 A	315 A
Charging capacity	270 Ah 15h	450 Ah 15h
Charging positions	2 + boost	6 + boost

**1498/AT****NEW!****Battery charger / starter, 12 V**

- For lead-acid storage batteries
- Charging current selector
- Ammeter
- Thermostatic long start protector
- Short-circuit protection fuse
- Reverse polarity protector

**1498/AT300**

014980760

**Battery charger / starter, 12 V****1498/AT500**

014980761

**Battery charger / starter, 12/24 V****1498/AT300 1498/AT500**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	300 W	890 W
Voltage	12 V	12/24 V
Maximum current:	25 A	37 A
Charging current:	20 A	30 A
Max. boost current:	300 Acc	450 A
Starting current	210 A	320 A
Charging capacity:	375 Ah 15h	540 Ah 15h
Charging positions:	2 + boost	6 + boost

**1498/AT701**

014980762

**Battery charger / starter, 12/24 V, wheeled****1498/AT1300**

014980764

**1498/AT2000**

014980765

**1498/AT701 1498/AT1001 1498/AT1300 1498/AT2000**

Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	1800 W	2200 W	2900 W	3600 W
Voltage	12/24 V	12/24 V	12/24 V	12/24 V
Maximum current:	75 A	90 A	120 A	150 A
Charging current:	50 A	60 A	80 A	120 A
Max. boost current:	550 Acc	980 A	1280 Acc	2000 A
Starting current	400 A	560 A	850 A	1100 A
Charging capacity:	600 Ah 15h	1350 Ah 15h	1800 Ah 15h	2250 Ah 15h
Charging positions:	6 + boost	14 + boost	12 + boost	12 + boost

1498/DG

NEW!



### Electronic battery charger / starter, 12/24 V, wheeled

Equipped with CPS (car protection system) technology, which allows boost function to be activated and deactivated fully automatically, to protect electronics on board vehicle.

- For Lead-Acid, AGM, Gel, Ca/Ca and Start/Stop batteries
- Electronic charge control via microprocessor
- Charging time setting
- Digital display
- Charging status LED indicators
- Control system for: reverse polarity, overcurrent, battery failure indication, safe start, protected start

1498/DG540E

014980770

Battery charger / starter, 12 V

1498/DG1100E

014980771

Battery charger / starter, 12/24 V

1498/DG540E 1498/DG1100E

	1498/DG540E	1498/DG1100E
Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz
Power	1320 W	2400 W
Voltage	12/24 V	12/24 V
Maximum current	55 A	100 A
Charging current	36 A	70 A
Max. boost current	380 Acc	580 Acc
Starting current	260 A	400 A
Charging capacity	810 Ah 15h	5000 Ah 15h
Charging positions	4 + boost	4 + boost + supply

1498TB/12-24N

014980402

NEW!

### Digital battery tester, 12-24V, with built-in printer

- allows the following to be tested: battery, alternator, starter and system
- reverse polarity protector
- Fitted with software for connecting instrument to PC
- Backlit display
- Compact, shockproof frame
- 9 language software

#### Technical data:

- Applications: 12V and 24V batteries
- Operating range: 100-2000 CCA
- Reference standards: CCA,SAE,DIN,EN,IEC,JIS, MCA, GB, BCI, CA
- Supported batteries: PB, WET, GEL, AGM, AGM FLAT, EFB, SLI
- Voltmeter: 9V-30V
- Cable length: 1800 mm
- Supported languages: Italian, English, French, German, Spanish, Polish, Dutch, Hungarian, Portuguese
- Included accessories: USB cable, 3 printer paper rolls



1497/C94

014970300

### Assortment of 94 car testing connectors for use with main diagnostic tools

- 2 t-taps
- 2 potentiometers
- 2 warning lights
- 2 SRS connectors
- 2 alligator clips
- 2 acicular probes
- 2 prods
- 2 dual banana connectors
- 4 single banana connectors
- 24 flat male terminals 0.6÷6 mm
- 12 round male terminals 1.6÷3.9 mm
- 24 flat female terminals 0.6÷6 mm
- 12 round female terminals 1.6÷3.9 mm



430x390x100 mm



**1498H****NEW!****Electronic multipurpose battery charger, 6-12V**

Electronic battery chargers 1498H: innovation and technology made to work for professionals! Fitted with LCD displays and 3-colour LED indicators, they can be used with all types of batteries, both lead-acid and lithium. The electronic control card provides full protection against unexpected events. The 9 automatic charging steps ensure fast, efficient charging, with recovery and desulphation features.

- LCD display
- 3-light intensity LED
- Charging and charge maintenance
- Protection against reverse polarity, short-circuits, overheating, overloading, overtemperature
- Spark protection
- 9 charging steps
- Floating system
- Functions: battery recovery, battery test and desulphation
- Clamp holder
- Reclining fixing hook
- Supplied accessories: cable with clamps, cable with eyelets

**1498H/4A**

014980204

**Electronic multipurpose battery charger, 6-12 V****1498H/16A**

014980216

**Electronic multipurpose battery charger, 12-24 V****1498H/8A**

014980208

**Electronic multipurpose battery charger, 12/24 V****1498H/25A**

014980225

**Electronic multipurpose battery charger, 12/24 V**

	<b>1498H/4A</b>	<b>1498H/8A</b>	<b>1498H/16A</b>	<b>1498H/25A</b>
Power supply (1ph)	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz	230 V - 50/60 Hz
Charging current	1-4 A	2-8 A	4-16 A	6-24 A
Battery types	Pb - GEL - Ca/Ca - AGM - Start/Stop - Lithium (LiFePo4)			
Charging capacity	5-80Ah (LiFePO4 1-80Ah)	10-160Ah (LiFePO4 2-160Ah)	20-360Ah (LiFePO4 4-360Ah)	30-550Ah (LiFePO4 6-550Ah)
Maintenance capacity	5-120Ah (LiFePO4 1-120Ah)	10-250Ah (LiFePO4 2-250Ah)	20-550Ah (LiFePO4 4-550Ah)	30-800Ah (LiFePO4 6-800Ah)
Power supply (DC)	N/A	13.8V - 5A	13.8V - 12A	13.8V - 20A
Output voltage	6-12V	12-24V	12-24V	12-24V
Degree of protection	IP65		IP20	

**1498BC/12**

014980040

**Multipurpose portable starter, 12V**

- Device protecting against polarity reversal, short-circuit, overcurrent, overcharge and overheating

**Supplied with:**

- Protective case
- Cable with starting clamps
- USB ports for charging electronic devices
- LED battery charge indicator
- USB and USB-C cable
- Mains power supply
- Multifunction LED torch



Starting current	600A
Pickup current	1500A
Battery type	4 cells LifePo4
Battery capacity	25000mAh

## 1498LT

### Portable high-performance starter, ultralightweight

The microprocessor provides full protection against:

- Polarity reversal
- Short circuits
- Incorrect voltage
- Overloads
- Underdischarge
- Overcharge
- Overtemperature

12-24V



12V



## 1498LT/12-24

014980014

Portable high-performance starter, 12-24 V, ultralightweight, suitable for use on cars, commercial vehicles and trucks



## 1498LT/12

014980012

Latest-generation battery LifePo4. Includes memory saver. Weighs no more than 2.5 kg.



### 1498LT/12 1498LT/12-24

Operating voltage	12V	12/24V
Continuous amperage	800 A	2000/1000 A
Maximum starting amperage	2000 A	5000/2500 A
Peak amperage	4000 A	10000/5000 A
Cable	1000 A	1000 A
Cable length	500 mm	1600 mm
Battery type:	4 cell LifePo4	4 cell LifePo4
Memory saving function:	YES	YES
Dimensions	260x135x72 mm	350x240x140 mm

## 1498EL

NEW!

## 1498EL/12

014980712

### Portable starter, 12V

- Pickup current: 1800A
- Battery capacity: 22 Ah



## 1498EL/12-24

014980724

### Portable starter, 12/24V

- Pickup current: 3600A 12V - 1800A 24V
- Battery capacity: 2x 22 Ah






## 1497/C23

014970200

**Assortment of 23 tools  
for releasing electrical  
connectors**



440x250x70 mm



## 1760DGT/2

017600008

**Digital automotive multimeter, portable, with  
2-channel oscilloscope and waveform generator**



### KIT CONTENTS:

- Multimeter tips
- 2 BNC crocodile clips for oscilloscope
- Tip probe for oscilloscope (1X and 10X)
- Battery charger
- Nylon sheath

Max. voltage	600V DC
Max. current	10A DC
Max. resistance	40MOHM
Max. capacity	100uF
Display	2.8" colour TFT
Resolution	320 x 240 pixels
Power supply	100V-240V AC, 50Hz-60Hz; DC INPUT 5V DC-2A
Battery	2 x 2600 mAh

199 mm  
40 mm  
98 mm



### Technical data:

- Display: 2.8" colour TFT
- Resolution: 320 x 240 pixels
- Power supply: 100V-240V AC, 50Hz-60Hz; DC INPUT 5V DC-2A
- Battery: 2 x 2600 mAh
- Dimensions: 199 x 98 x 40 mm
- Weight: 624g

### Multimeter Specifications:

- Test: Voltage, Current, Resistance, Capacity, Diodes and On-Off
- Max. voltage: 600V AC-DC
- Max. current: 10A AC-DC
- Max. resistance: 40MOHM
- Max. capacity: 100uF

### Oscilloscope Specifications: Horizontal

- Bandwidth: 40MHz
- Sampling frequency range: 250MSa/s (single channel) - 125MSa/s (double channel)
- SEC/DIV range: 5ns/div ÷ 500s/div 1,2,5 sequence

### Vertical

- VOLTS/DIV range: 10mV/div ÷ 10V/div at BNC input
- Selectable analogue, bandwidth limit, typical: 20MHz
- Low frequency response (-3db): ≤10Hz at BNC
- DC Gain Accuracy: ± 3% for Normal or Medium acquisition mode, 10V/div ÷ 10 mV/div

### Trigger

- Type: Edge
- Mode: Auto, Normal, Single
- Slope: Rising, Falling, Rising, & Falling
- Source: CH1, CH2

### Input

- Coupling: DC, AC or GND
- Supported probe attenuation factors: 1X, 10X, 100X, 1000X

### Arbitrary waveform generator

- Waveform frequency: Sine (1Hz÷25MHz), Square (1Hz÷10MHz), Ramp (1Hz÷1MHz), EXP (1Hz÷5MHz)
- Width: 2.5Vpp (50Ω) - 5Vpp (high impedance)
- Output impedance: 50Ω

## 1760DGT

017600005

**Digital automotive multimeter**

### Technical Data:

- **RPM (tachometer):**  
For 2 and 4 cylinder engines  
RPM4 600 - 4000 RPM  
RPM4 600 - 12000 RPM (x10 RPM)  
RPM2/DIS 300 - 4000 RPM  
RPM2/DIS 300 - 6000 RPM (x10 RPM)
- **Dwell angle:** 4-8 CYL
- **DC voltage:** 400mV-4/40/400/1000V
- **AC voltage:** 4/40/400/700V
- **DC current:** 40/400mA-4/20A
- **AC current:** 40/400mA-4/20A
- **Resistance:** 400Ω-4/40/400kΩ-4/40MΩ
- **Capacity:** 40/400nF-4/40/100μF
- **Frequency:** 5/50/500Hz-50/500-10MHz
- **Duty cycle:** 0.1 % - 99.9%
- **Pulse amplitude:** 1 - 10ms
- **Diode test:** Test current 0.3mA
- **Continuity:** <150Ω - Test current <0.3mA
- **Display:** High-contrast, backlit 4-digit LCD
- **Overvoltage:** Category II 1000V
- **Auto power off:** 30 minutes
- **Power supply:** 1 9V battery (included)
- Inductive clamp (included)
- 2 tips (included)
- Soft cloth case (included)
- Operating manual



## 1760B

017600012

**Digital multimeter**

### SPECIFICATIONS

- DC voltage: 200 mV-2/20/200/1000
- VAC voltage: 2-20/200/700VDC
- current: 2/20/200 mA-20 AAC
- current: 2/200 mA- 20 A
- Resistance: 200Ω - 2/20/200 kΩ - 2/20 MΩ
- Capacity: 2/20/200 nF - 2/200 μF
- Temperature: -20° + 1000°C/ -4 °F ~ +2000°F
- Frequency: 20kHz
- Power supply: 1 9V battery (included)





**961N**

009610030

**NEW!****Electronic videoscope with flexible, rotating probe**

- TFT LCD 5" screen
- Supports SD cards
- Video and image recording
- 4 LEDs
- Power supply via USB port (built-in battery)
- Rotating probe
- High resolution

Discover the videoscope, 961N, your versatile partner for all jobs! Based on the probe that can be rotated 360° and the double lit camera reaching the most inaccessible points has never been so easy. Defects and problems can be found easily and accurately. And with the new TFT LCD 5" display and outstanding resolution (1920x1080), you can enjoy sharp, bright images and videos, like never before. Choose the videoscope, 961N, for uncompromised quality.

**1760PA/AC-DC**

017600000

**Amperometric clamp and digital multimeter****SPECIFICATIONS**

DC voltage: 0.1mV ÷ 600V  
 AC voltage: 0.1mV ÷ 600V  
 AC current: 0.01A ÷ 1000A  
 DC current: 0.01A ÷ 1000A  
 Resistance: 0.1Ω ÷ 40MΩ  
 Capacity: 0.001nF ÷ 40 μF  
 Frequency: 0.001kHz ÷ 4kHz  
 Temperature: -40°C ÷ 1000 °C  
 -40°F ÷ 1832°F

**1000A****1760/IR500**

017600350

**Digital infrared thermometer with dual laser aiming system****TECHNICAL DATA**

Temperature range: -50 ÷ 500 °C (-22 ÷ +932 °F)  
 Display resolution: 0.1 °C (0.1 °F)  
 Emissivity: 0.1 ÷ 1 adjustable  
 Accuracy: -50 °C ÷ +20 °C (+/- 3 °C);  
 20 ÷ 500 °C (+/-2% or 2 °C)  
 Optical resolution (D:S): 12:1  
 Auto power off: ca. 10 seconds  
 Operating temperature: 0 °C ÷ 50 °C  
 Storage temperature: -20 °C ÷ 60 °C  
 Power supply: 1 9V battery

**500°C****1760/TC2**

017600161

**Combination contact/non-contact digital tachometer****TECHNICAL DATA**

- For measuring:
  - non-contact rotational speed (rpm)
  - contact rotational (rpm) and linear surface speed (m/min or ft/min).
- 5-digit LCD display.
- Scale:
  - non-contact speed 2.5÷99,999 rpm
  - contact speed 0.5÷19,999 rpm
  - linear surface speed 0.05÷1,999.9 m/min.
- Frequency: 0.8 sec.
- Power supply: 4 1.5V batteries (included), AA size, or 6V power supply unit (not included).

**Supplied with the following:**

- Adaptor for contact tip measurement
- Male (contact) rubber tip (2 pcs.)
- Female (contact) rubber tip (1 pcs.)
- Linear measurement tape (1 pcs.)
- Reflecting tapes
- Instruction manual
- Plastic case





## CB52-0



052000201

### Gearbox/transmission trolley with liquid recovery system

Inclined plane and drain holes allow liquids to be recovered in collection tank

Fitted with:

- 4 swivel castors, including 2 with brakes
- Tool drawer
- Pull-out liquid collection tank; capacity: 7 l
- 2 shelves



**CAPACITY 7 L**

- Level indicator
- Big diameter pan with breakwater grate; capacity: 12 l
- Pneumatic tank emptying through 1.8 m pipe
- Tool tray

## 1877

018770008

**Exhausted oil drain unit, wheeled, with 90 l tank**



## 1877P

018770180

**Exhausted oil drain unit, wheeled, with polyethylene tank**

- Tank capacity: 40 l
- Large oil pan made of PP
- Level indicator
- Pneumatic drum emptying



## 1877A

018770080

**Exhausted oil drain unit / vacuum cleaner, wheeled, with 90 l tank and pre-chamber**

- Transparent pre-chamber: capacity 9.5 l
- Pneumatic tank emptying through 1.8 m pipe

**Standard accessories::**

- 1 hard probe, Ø 5x700 mm
- 1 flexible probe, Ø 5x700 mm
- 1 hard probe, Ø 6x600 mm
- 1 flexible probe, Ø 6x700 mm
- 1 flexible probe, Ø 7x700 mm
- 1 flexible probe, Ø 8x700 mm
- Adapters for VW, BMW, CITROËN



## 1877F

018770100

**Exhausted oil drain unit for 1 l bottles**

- Fits up to 4 bottles at a time
- Supplied with 2 2-l jerrycans

**FITS UP TO 4 BOTTLES AT A TIME**



## 1482SN

014820110

**Quick coupler swivel pliers for fuel pipes, with articulated jaws**



L mm
260

## 1488

**Oil-filter wrench with double chain**




	Ø mm		
<b>1488</b>	60÷110	014880001	
<b>1488L</b>	60÷160	014880050	

## 1491

014910001

**Adjustable oil filter wrench**

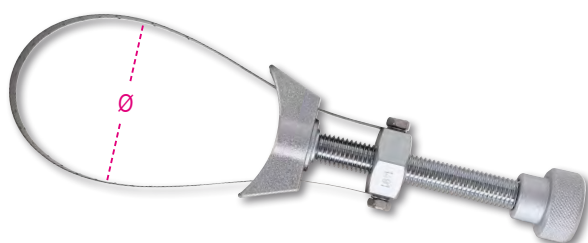

Ø mm
65÷110

## 1490

**Strap wrenches for oil filters**



	Ø max mm		
<b>1490/1</b>	160	014900001	
<b>1490/2</b>	240	014900002	

## 1493FF/2

014930128

**Oil filter wrench with swivel ratchet head**

This wrench has been specially designed to make it easier to remove and install oil filters of PSA Group and Ford vehicles.



12"

## 1493/C30

014930000

**Set of 28 oil filter wrenches**

- For tightening and loosening oil filters
- 1/2" female drive
- In plastic case

530x400x110 mm

Sizes included in kit (Ø mm / n°. of sides) 1493:  
 65/14 - 68/14 -  
 73/14 - 74/15 - 76/15 -  
 75.77/15 - 76/14 - 76/8 -  
 78/15 - 80/15 - 82/15 -  
 86/16 - 90/15 - 92/10 -  
 93/15 - 95/15 - 100/15 -  
 106/15 - 108/15



1493PF (Purflux)  
 66/6 - 76/12 - 76/30 - 86/18  
 93/36 - 93/45 - 96/18 - 108/18

Includes 1 adjustable oil filter wrench Ø 65÷120 mm



## 1852R1750

018520175

### Portable induction heater

- Heats and loosens bolts, hubs and bearings without using flames.
- Allows any type of ferromagnetic metal to be heated.

#### Technical data:

- Input voltage: 230V AC, 50/60 Hz
- Input current: max. 7,5A
- Power: max. 1.75 kW

#### Benefits

- 1 Time saving: quick, extremely accurate heating
- 2 Fire safety: does not produce flames, maximum operator safety
- 3 Functional: can be used with one hand, and coils can be easily interchanged

#### Fields of Application:

- Automotive industry
- Industrial maintenance
- Aviation industry
- Naval industry
- Petrochemical industry



#### Standard equipment:

Two front attachable coils, Ø 19 and 26 mm, for loosening nuts



One flat coil for heating surfaces



One flexible coil, 800 mm long



480x370x130 mm

**MAXIMUM SAFETY  
WITHOUT USING  
FLAMES.**

## 960VTC

009600261

### Leakage tester for petrol engine cylinders

After compressed air has been introduced into cylinder, gauge will allow it to be tested for compression leaks



2,3 kg

Supplied couplers:

M10 - M12 - M14 - M14 lunga


373x295x70,6 mm

## 1472PU/P

014720121

### Ultrasonic cleaning tank, 27 l

- Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (carburetors, valves etc.)

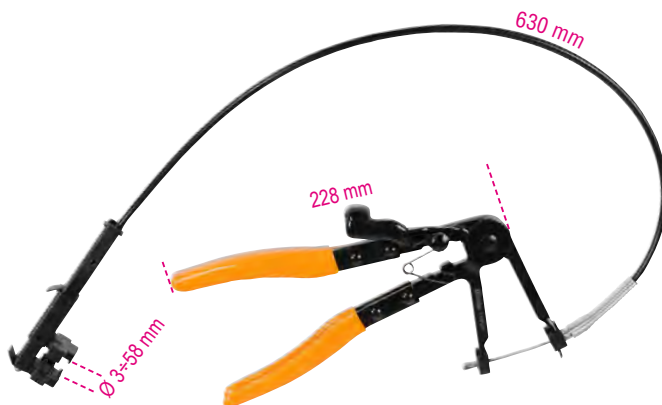

## 1472PU

014720120

### Combination collar and hose clamp pliers

The multi head jaws inclined at 45° allow most commercially available collars to be clamped



## 960KC-M8/M9/M10

009600801

Assortment of tools for removing broken or damaged glow plugs

**FOR SPARK PLUGS WITH THREADS M8-M9-M10**



380x290x50 mm

## 1759HD/3

017590063

Cooling system seal testing and circuit filling tools

Make it possible to check circuit (pipes, joints, pumps, radiators) for leaks under pressure and quickly fill circuit, avoiding air bubble formation



600x500x140 mm

## 960KPC

009600780

Reversible impulse extractor with adjustable torque for glow plugs

- Pneumatic extractor with adjustable torque and special sockets allow jammed glow plugs to be unscrewed, thereby minimizing damage risk
- 5 1/4" impact sockets, long series, specially designed for glow plugs: 8-9-10-11-12 mm, 2 extensions and 1 articulated joint
- 4 adjustable driving torques: 10-20-30-40 Nm
- Right-hand and left-hand adjustment



## 1884

018840010

Oil filler tool for manual and automatic gearboxes and differentials

- Complete with 12 adaptors for direct connection
- Fitted with nonreturn valve for leakage-free oil filling
  - Delivery: 70 cc per pump shot
  - Tank capacity: 7.5 l
  - Maximum permissible oil viscosity: SAE 140

12 ADAPTORS

FORD	AT-101
UNIVERSAL (Bmw, Honda, Nissan...)	AT-102
VW-AUDI	AT-103
VW-AUDI-PORSCHE	AT-104
VW-AUDI-MINI COOPER	AT-105
MERCEDES	AT-106
DSG	AT-107
VW-AUDI CVT	AT-108
VOLVO	AT-109
TOYOTA-LEXUS	AT-110
SKODA	AT-111
VW Passat/Tiguan <2007	AT-112



## 1471M/C22

014710101

Pneumatic tool for pushing back and rotating right and left disc brake pistons with accessories

- Automatic jack
- Thrust: 150 kg
- Operating pressure 5÷8 bar

350x310x85 mm





## Multi-purpose trolley

Can be used as a mobile workstation for diagnostic tools, laptops, testers and battery chargers

- Painted sheet metal frame: unparalleled firmness and sturdiness
- Ergonomic handle
- 2 fixed rear castors Ø 160 mm
- 2 steering front castors Ø 125 mm (one with brake)



2-level top

2 central shelves with adjustable position and 1 fixed low shelf

1099 mm  
480 mm  
435 mm



Pull-out drawer for housing a mini keyboard



1 paper holder



4 useful side cable reels made of plastic



2 useful side containers

**CA49-G**

049000112

**Multi-purpose trolley with door, empty**

36,5 kg

**CX49-G**

049000102

**Multi-purpose trolley, empty**

43 kg

**1895**

**Ultrasonic cleaning tank with special degas function**

- Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (carburetors, valves etc.)
- Digital display for temperature and cleaning time selection
- Two cleaning modes: "soft" and "normal"
- For normal cleaning, just use water at a temperature of 50/60 °C
- For more accurate cleaning, add non-foaming detergent solutions specific for ultrasonic tanks
- Using the degas mode speeds up air release throughout the tank, thereby improving ultrasonic cleaning efficiency



**1895 157**



**1895 6**

018950060

6 l

**1895 13**

018950130

13 l

**1895 27**

018950270

27 l

**1895 157**

018950357

157 l

**NEW!**

**1895 6**

**1895 13**

**1895 27**

**1895 157**

	6 litres	13 litres	27 litres	157 litres
Tank capacity	6 litres	13 litres	27 litres	157 litres
Drain tap	✓	✓	✓	✓
Power	150 Watt	300 Watt	500 Watt	2160 Watt
Heating power	300 Watt	400 Watt	500 Watt	5000 Watt
Temperature range	0+80 °C	0+80 °C	0+80 °C	30+110 °C
Cleaning time range	0-99 minutes	0-99 minutes	0-99 minutes	0-59 minutes
Frequency	40 kHz	40 kHz	40 kHz	28 kHz - 40 kHz
Power supply	220/230V	220/230V	220/230V	220/380V
Dimensions	330x180x310 mm	350x325x320 mm	530x330x380 mm	840x640x750 mm
Tank size	300x155x150 mm	325x235x145 mm	500x300x200 mm	700x500x450 mm



**1471C**

014710330

**Tool for manually pushing back brake pistons, with ratchet**

The tool for manually pushing back brake pistons, fitted with two swivel plates and a ratchet movement mechanism, means an effective, flexible solution for quick jobs - e.g. on commercial vehicles.


**1467LF/2**

014670099


**Electric instrument for brake fluid replacement**

Allows brake fluid to be easily and quickly replaced on vehicle

- Automatically stops when tank is empty, thereby preventing air from being let in
- Maximum tank volume: 20 l
- Operating pressure: 0.4÷3.5 bar
- Power supply: 230V

Supplied with:

- Brake oil recovery tank
- 1 standard cap E20

**“PULSATING EFFECT”**


**1467**

014670001

**Brake fluid extractor**

Pressure: min 5 bar, max 11.5 bar


**3035**

030350100

**Tyre trolley**

- For easily transporting tyres up to 980 mm in diameter
- The sturdy frame allows tyres to be handled without bearing the weight physically
- Can be used as a top by locking position horizontally
- 2 castors Ø 260 mm
- 2 castors Ø 125 mm
- Maximum transportable height: 1.60 m
- Maximum carrying capacity: 200 kg
- Forks can be adjusted in 2 positions:  
first position: maximum opening 880 mm  
second position: maximum opening 980 mm


**989**

009890001

**Wheel balancing weight tool**




**1950BZK**

019500078

**Tyre bead seater**

Ø 290x440 mm

- Secondary handle with push-button operation helps keep hold of tool during use
- Tank capacity: 18 l
- Operating pressure: 3-8 bar
- Maximum tank pressure: 16 bar
- Pressure relief valve
- Gauge with graduated scale
- Plastic inlet preventing rim damage

**1950BZK/T**

019500080

**Truck tyre bead seater****NEW!**

- Tank capacity: 36 l
- Operating pressure: 3-8 bar
- Maximum tank pressure: 16 bar
- Pressure relief valve
- Gauge with graduated scale
- Plastic inlet preventing rim damage



Ø 290x560 mm

**1949GPA**

019490018

**Tyre inflator**

- Shockproof rubber coated body
- Metal operating lever
- Operating pressure: 0,5÷12 bar, 7÷174 psi
- Pipe length: 58 cm
- 360° hose rotation
- 1/4" air inlet

- Pressure release feature
- Pressure measurement feature

**1949DGT/2**

019490021

**Digital tyre inflator**

- 4 units of measurement, bar/psi/kpa/kgf
- Backlit LCD display
- Resolution: 0.05 bar
- Self-power off after 1.5 minutes

**DIGITAL****962****Tyre levers**

	L mm	A mm		
<b>962 500</b>	500	27	009620005	
<b>962 600</b>	600	27	009620006	

**972/C4BMW**

009720004

**Removal kit for anti-theft bolts with free rings, for BMW and Mini cars**


516x145x66 mm

**1568**

015680001

### Pneumatic assembly tool for silicone axle shaft boots

- 8 spreader arms maximum arms
- preading: 145 mm

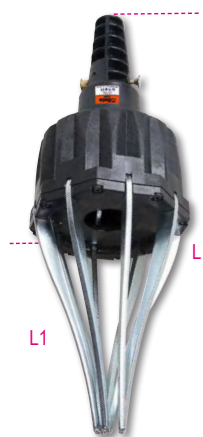

L mm	L1 mm
420	195



**1550U**

015500010

### Pneumatic shock absorber removal tool for cars, SUVs and commercial vehicles

- Upper universal hold system that allows all left/right-hand spring diameters to be compressed with one upper adaptable plate
- Active safety system on spring: safety hook and 3 locking valves allow spring to be properly positioned/seated, maintaining such position throughout compression. If spring is not positioned properly, system will stop machine.
- Protective "Full Body" Grille

- Supplied with 2 lower forks for diameters 78-205 mm
- Maximum thrust: 2 tons (10 bars) - 1.6 tons (8 bars) - 1.2 tons (6 bars)
- Spring compression stroke: 335 mm



MAXIMUM THRUST 2 TONS (10 BAR)

**1556/1A**

015560101

### Compressor for shock absorber springs

min L Max 65÷320 mm





### Lever for removing wishbone heads and shock absorbers from pillar

One operator can position lever effortlessly and proceed with disassembly

**1567**

015670001



**1068**

010680000

### Adjustable self-locking pliers with hammer face

The self-locking pliers with 1 kg sliding hammer face is ideal for pulling stud bolts, broken screws and sheets, especially in the car repair industry.

Ø max 19 mm

78



## 1052

**Adjustable self-locking pliers,  
concave jaws**

	L mm	ø Max mm	kg	
<b>1052/140</b>	140	22	175	010520014
<b>1052/190</b>	190	36	360	010520019
<b>1052/240</b>	240	42	590	010520024
<b>1052/300</b>	300	55	900	010520030



## 1768

017680010

**Aluminium footboard**



L mm	L1 mm	H mm
960	300	475



## 3009

030090001

**Wheel lifter**

Maximum lifting capacity: 550 kg

- 4 pivoting rollers
- Roller width: 200 mm
- For wheels up to 240 mm in width

**IDEAL FOR:**

- **LOADING DAMAGED CARS  
ONTO TOW TRUCKS**
- **CAR REPAIR GARAGES**
- **MOVING CARS IN SHOWROOMS**



## 1766

017660001

**Double suction  
lifter**



## 1479LB/C5

014790150

**Kit of 5 metal trim  
pin removers**

215x165x50 mm



## 1367/K10

013670200

**Kit of punches  
for installing parking  
sensors**

**Perpendicular,  
burr-free holes**

Sizes Kit contents:  
17 - 18 - 18,2 - 19 - 20 - 22,5  
- 24 - 26 - 26,7 - 32 mm



## 1365/K13

013650013

### Oil pressure pump, 10 t, and bodywork accessories kit in handy trolley

Kit contents:

- oil pressure pump, 10 t, with 1.5-m-long hose, 1/2" coupling
- piston
- wing opening pliers; capacity: 500 kg
- baseplate, 150x90 mm
- L-shaped base, 50x50 mm
- 4-point punch
- round, knurled punch, Ø 50 mm
- wedge-shaped punch, 43 mm
- 240-mm-long extension
- 450-mm-long extension
- 475-mm-long extension
- rubber head
- male-to-male coupling for installing accessories



33 kg

900x420x180 mm

## 1366SH

013660400

### Multifunction bodywork spotter


- Microprocessor for managing welding parameters
- Contact and manual welding cycle start
- Automatic spot welding time setting function
- Supplied with quick coupling gun and 2.2-m-long ground cable

Accessory kit contents:

- extractor hammer
- three-pointed washer head
- 10 three-pointed washers
- carbon electrode
- squashing electrode



23 kg



Power supply	230V
50% power	2.5 KVA
Power peak	13 KVA
Amp output	2850 (2%) A
Max. Amp output	3200 A



## 2254K

022540101

### Reusable seat, steering wheel and gear knob protector



## 2254F

022540150

### Car front protector

Allows front part of vehicle to be protected, while leaving openings for headlights and radiator



## 1479/B27

014790407

### Kit of 27 nylon tools for removing pins and working on plastics and seals, hangable





## 1870I

018700220

### Solid and fluid vacuum cleaner, 20 l, stainless steel drum

- Single-stage by-pass motor
- Voltage: 220/240 V
- Frequency: 50/60 Hz
- Max. power: 1200 W
- Airflow rate: 58 l/sec.
- Max. suction pressure: 190 mbar
- Max. drum capacity: 20 l, made of stainless steel
- Acoustic emissions: <70 dB(A)
- Cable length: 5 m

#### STANDARD ACCESSORIES Ø 36 mm

- 1 corrugated hose with ergonomic handle and vent
- 2 hard extension tubes
- 1 multiuse brush for floors and fluids
- 1 flat nozzle
- 1 paper bag



#### FILTERING SYSTEMS

- 1 surface air filter cartridge 1900 cm<sup>2</sup> - 12 µm nom.
- 1 anti-foam filter PPI 45/PPI 30



IPX4



## 1875LT

018750000

### Injection/extraction carpet/upholstery cleaner

#### Ideal for deeply cleaning textile surfaces.

It dispenses pressure sprayed detergent and sucks it up with dirt, leaving surfaces almost dry



### HIGHLY EFFECTIVE FOR CAR SEATS AND INTERIORS



#### Technical data:

- voltage: 230/240 V
- frequency: 50/60 Hz
- max. power: 1100 W
- airflow rate: 58 l/sec.
- max. drum capacity: 20 l
- max. detergent tank capacity: 3 l
- max. pump pressure: 7 bar
- max. suction pressure: 21 kPa
- pump power: 48 W

#### Supplied accessories:

- 1 hose complete with ergonomic handle
- 1 dispenser unit
- 2 hard extensions
- 1 small spray extraction nozzle
- 1 big spray extraction nozzle
- 6 power cord locknuts

## 1874 50

018740050

### Solid and fluid vacuum cleaner, 50 l, stainless steel drum

- two-stage by-pass motor
- voltage: 220/240 V
- frequency: 50/60 Hz
- max. power: 1350 W
- airflow rate: 55 l/sec.
- max. suction power: 240 mbar
- max. drum capacity: 50 l, made of stainless steel
- acoustic emissions: <63 dB(A)
- cable length: 6 m
- trolley for accessories

#### FILTERING SYSTEMS

- 1 filter paper bag
- 1 surface filter cartridge 5200 cm<sup>2</sup>, 12 µm nom.
- 1 anti-foam filter PPI 45/PPI 30

#### STANDARD ACCESSORIES, Ø 45 mm

- 1 corrugated hose with ergonomic handle
- 2 stainless steel extension tubes
- 1 industrial brush frame
- 1 industrial section for carpets
- 1 industrial section with fluid collection hoses
- 1 flat nozzle



**1898/C**

018980940

**NEW!**
**Wheeled sprayer, 25 l**

- Dual function: spraying and foaming
- Painted steel tank
- Stainless steel nozzle
- Anti-twisting hose
- Tank pressure gauge
- Tank level indicator


**Technical data:**

- Tank capacity: 25 l
- Supply hose length: 5 m
- Maximum working pressure: 4-5 bar
- Nozzle length: 0.65 m
- Maximum tank pressure: 8 bar

**1898/S**

018980932

**Hand pressure pump with 5 l tank**

- Stainless steel nozzle
- Locking lever for continuous jet
- Adjustable nozzle with straight jet and mist spray
- Shoulder strap for ease of transport
- Nozzle hook-up handle
- 1.2-m-long hose
- Not for use with hydrocarbons


**2251N**

022510012

**Swivel creeper seat with drawers**

- Round swivel seat, vertically adjustable through a gas piston mechanism (445-580 mm)
- Square tool chest (380 mm) with 2 drawers (2+1)
- Drawer dimensions: 350x180x90 mm [TAB]
- Tote-tray dimensions: 2X 190x190mm - 1X 380x190mm [TAB]
- 4 pivoting castors, Ø 75 mm


**1898/M**

018980930

**Pressure sprayer with 1,5 l tank**

- Adjustable nozzle with straight jet and mist spray
- Graduated scale (0.5 l - 1 l - 1.5 l)
- Locking lever for continuous jet
- Not for use with hydrocarbons


**3003C**

030030100

**Creeper made of shockproof plastic**

Complete with:

- Head and lumbar region with carbon look finish
- Upper metal plates for fixing magnetic accessories
- 6 rubber castors, 79 mm in diameter



79 mm

5,5 kg

**3002**


030020001

**Creeper and seat**

- Steel frame
- PVC lining with upholstery
- Easily convertible into a creeper or a seat



420 mm

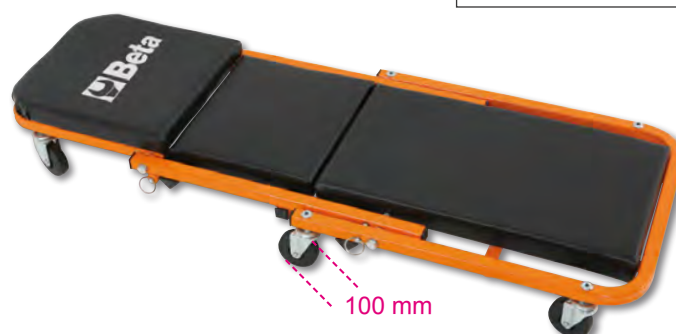

100 mm



### 3033E/3T

030330130

#### Hydraulic jack, 3 t

- Controlled descent speed
- Nylon wheels

H min-Max mm	L mm	L1 mm
95÷515	700	370



### 3030H/2T

030300220

#### High-lift hydraulic jack, 2 t, with 6 wheels

Makes it possible to work on vehicles that are high from the ground and have a long shock absorber travel

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

H min-Max mm	L mm	L1 mm
85÷780	1010	300



### 3030/2T

030300020

#### Lowered hydraulic car jack, 2 t with 6 wheels

- Car jack can be easily handled on uneven, irregular floors
- Dual front tilting wheels made of plastic material (PTFE)
- Pedal allows easy approach

H min-Max mm	L mm	L1 mm
85÷520	860	400



### 3033/3T

030330030

#### Hydraulic jack, 3 t long version

- Particularly suitable for use on commercial vehicles
- Polyamide wheels

H min-Max mm	L mm	L1 mm
140÷520	1180	370



# 3029/2T

030290020

## Lowered hydraulic jack, 2 t, with 4 wheels

- Quick approach pedal
- Steel frame and nylon wheels
- Minimum height: 75 mm
- Load-bearing capacity: 2 t
- Min./max. height: 75/500 mm
- Weight: 36 kg



H min-Max mm	L mm	L1 mm
75÷500	720	290

2 t



# 3029L/2T

030290120

## Long, lowered hydraulic jack, 2 t

Makes it possible to work on vehicles with a reduced height from the ground and internal lifting point.

### Features:

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

H min-Max mm	L mm	L1 mm
75÷520	930	295



2 t



# 3065/40-20T

030650200

## Air hydraulic jack, 40/20 tons

- suitable for use on heavy vehicles
- functional and easy to handle, for transportation on mobile repair shops as well
- automatic piston return
- two descent valves with under load speed control

H min-Max mm	L mm	L1 mm
150÷300	525	300



40-20 t



# 3067/60-15T

030670120

## Air hydraulic jack, 60-30-15 t

- Automatic piston return
- Two descent valves with under load speed control
- supplied with two extensions, 70 and 120 mm long
- Include due prolunghe da 70 e 120 mm
- Power supply pressure: 8-10 bar
- Air consumption: 600 l/min

H min-Max mm	L mm	L1 mm
120÷255	660	250



60-30-15 t






## 3023

030230050

**Pit and under bridge jack  
with screw adjustment**

**MAXIMUM CARRYING  
CAPACITY: 350 KG**

H min-Max mm	Ø mm
1350÷2030	300

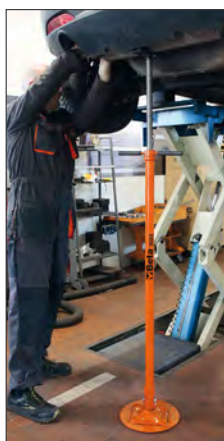

## 3011T

**NEW!**

**Hydraulic bottle jack**



	C max kg	H min÷max mm		
<b>3011T 2</b>	2000	170÷366	030110020	
<b>3011T 3,5</b>	3000	170÷366	030110035	
<b>3011T 5</b>	6000	203÷467	030110050	
<b>3011T 10</b>	10000	220÷484	030110100	
<b>3011T 15</b>	15000	230÷497	030110150	
<b>3011T 20</b>	20000	245÷521	030110200	
<b>3011T 32</b>	32000	260÷420	030110320	
<b>3011T 50</b>	50000	280÷450	030110500	

## 3010T

**Jack stands, pair**

	C max kg	H min÷max mm		
<b>3010T 2</b>	2000	280÷425	030100002	
<b>3010T 3</b>	3000	285÷430	030100003	
<b>3010T 6</b>	6000	400÷580	030100006	
<b>3010T 10</b>	10000	471÷735	030100010	



3010T 2  
3010T 3  
3010T 6



## 3010H

**Heavy-duty jack stands**

	C max kg	H min÷max mm	L / L1 mm			
<b>3010H631-T15</b>	15,000	445÷631	300x300	22,5	030100150	
<b>3010H1077-T15</b>	15,000	645÷1077	300x300	30	030100165	



## 3010V

**Heavy-duty jack stands,  
screw adjustable**

	C max kg	H min÷max mm	L / L1 mm		
<b>3010V600-T20</b>	20,000	410÷600	330x330	030100200	
<b>3010V1090-T20</b>	20,000	665÷1090	460x460	030100220	






## HYDRAULIC PRESS WITH MOVING PISTON

**3028 15**


030280015



	3028 15	3028 20	3028 30	3028 50
Maximum capacity	15 t	20 t	30 t	50 t
Single speed pump	✓	✓	✓	✓
Moving piston	✓	✓	✓	✓
Hydraulic safety in case of overloading	✓	✓	✓	✓
Gauge	✓	✓	✓	✓
Set of V-shaped prisms	✓	✓	✓	✓
Hoist	X	X	X	✓

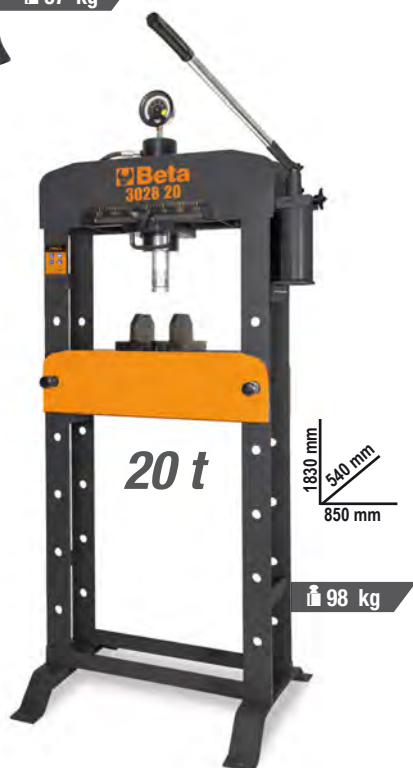
**3028 20**

030280020

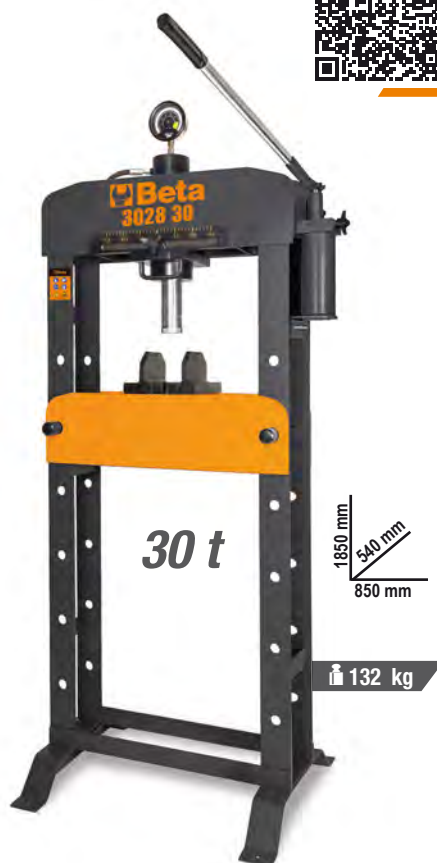
**3028 30**

030280030


**3028 50**

030280050

**3028/KP**

030280055

### Kit of pin punches and plate for presses 3028

Sizes of pin punches:

- Ø10X90mm
- Ø12X90mm
- Ø16X90mm
- Ø18X115mm
- Ø20X115mm
- Ø22X115mm
- Ø25X140mm
- Ø30X140mm


**3027PR/N**

030270410

**NEW!**

### Press supporting tool for removal/insertion of hubs, bearings and silent blocks

Universal device allowing user to install/remove hubs, bearings and silent blocks into/from their housings by operating via a press, through a supporting base and dedicated accessories. Designed to adapt to irregular geometric shapes of hubs/king pins on which operator must work. Can be used with presses 3027N and 3028.

Technical data:

- Working range: min. 135 mm - max. 150 mm
- Maximum load bearing capacity: 20 t





## 3006

030060000

### Jack and positioner for tractor and excavator wheels

- Max. capacity: 1,500 kg
- Min. wheel diameter: 1,000 mm
- Max. wheel diameter: 2,200 mm
- Max. wheel thickness: 800 mm



## 3014SAR

030140360

### Folding engine stand

- Easy to fold up, for significantly increased compactness
- Allows 360° rotation of engine or gear
- Provides unparalleled safety and stability during jobs



1000 mm  
920 mm  
1145 mm

**MAXIMUM  
CAPACITY: 450 kg**

## 3026



### Hydraulic pit and under bridge jack

3026 0,3

030260003

24,7 kg

3026 0,5

030260005

31 kg

3026 1,0

030260010

37,8 kg



**3026 0,3**

**3026 0,5**

**3026 1,0**

Maximum capacity:	300 kg	500 kg	1000 kg
Pedal pump	✓	✓	✓
Minimum height	1120 ÷ 1970 mm	1140 ÷ 1990 mm	1140 ÷ 1990 mm
Load limiting valve	✓	✓	✓

## 3025N 1,0

030250110

99 kg

### Folding hydraulic crane with dual effect pump

- Maximum capacity: 1 t
- 4 loading positions: 300-600-800-1000 kg
- With load limiting valve and chrome-plated stand
- Controlled descent speed
- Nylon wheels
- Maximum height: 2420 mm



1560 mm  
1000 mm  
1600 mm



## 3025N/PF

030250111


### Barrel handling pliers




- Sturdy supporting pins for reliable performance over time
- Long jaws for secure, firm hold on several different types of barrels
- Maximum lifting capacity 300 kg

**8150**

lifting web slings, purple 1t  
two layers with reinforced eyes  
high-tenacity polyester (PES)  
belt  
EN 1492-1

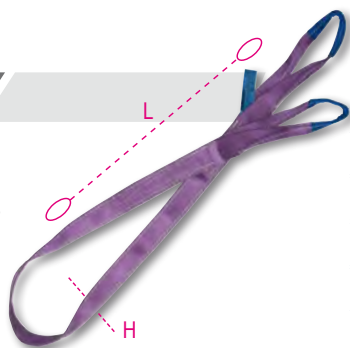



- Lifting web slings
- Two layers with reinforced eyes
- High-tenacity polyester (PES) belt

	L m	H mm		
<b>8150 1-T1</b>	1	30	081500010	
<b>8150 2-T1</b>	2	30	081500020	
<b>8150 3-T1</b>	3	30	081500030	
<b>8150 4-T1</b>	4	30	081500040	

**8153**


Lifting web slings,  
green 2t two layers with  
reinforced eyes  
high-tenacity polyester  
(PES) belt  
EN 1492-1

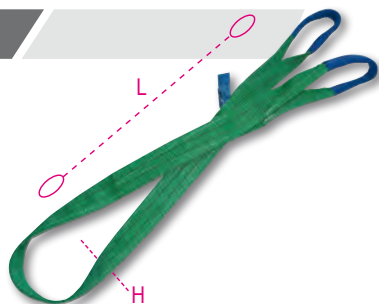


	L m	H mm		
<b>8153 1-T2</b>	1	60	081530010	
<b>8153 2-T2</b>	2	60	081530020	
<b>8153 3-T2</b>	3	60	081530030	
<b>8153 4-T2</b>	4	60	081530040	

**8156**

Lifting web slings,  
yellow 3t two layers  
with reinforced eyes  
high-tenacity polyester  
(PES) belt  
EN 1492-1

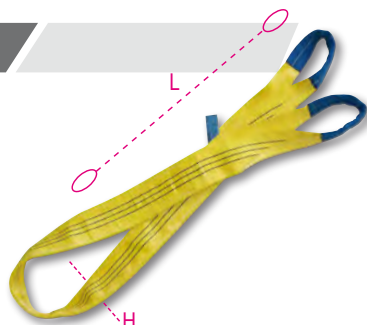

	L m	H mm		
<b>8156 2-T3</b>	2	90	081560020	
<b>8156 3-T3</b>	3	90	081560030	
<b>8156 4-T3</b>	4	90	081560040	
<b>8156 6-T3</b>	6	90	081560060	

**8181 6/B4**

081810916

Bag with set of 4 ratchet tie-downs 8181, 6 m  
high-tenacity polyester belt, single hooks  
The bag includes 4 ratchet tie-downs with single hooks,  
high-tenacity polyester belt (PES), 35 mm, 6 m long.



L m	LC kg
6	1000



EN 12195-2

**8182 8,5/B2**

081821885

Bag with set of 2 ratchet tie-downs 8182, 8.5 m  
high-tenacity polyester belt, single hooks  
The bag includes 2 ratchet tie-downs with single hooks,  
high-tenacity polyester belt (PES), 50 mm, 8.5 m long.



L m	LC kg
8,5	2000



EN 12195-2





# THE REVOLUTIONARY IMPACT WRENCH THAT DOES NOT REQUIRE LUBRICATION

**NEW!**

The impact wrench, 19270LS, fully designed, developed and engineered by Beta Utensili, relies on the **OIL-LESS system**, a brand-new innovation in the pneumatic tool industry: it allows the impact wrench to operate without having to be periodically lubricated with oil, thus ensuring increased durability and high performance.

The painstakingly studied assembly, micrometer alignment of the interior parts and use of innovative first-rate materials result in a reduced number of failures, for lubrication-free lifetime use.



## PATENT PENDING

The **OIL-LESS impact wrench** stands out for **high TORQUE TRANSMISSION** – that is, **1750 Nm** –, which makes it ideal for any application.


**19270LS**
**NEW!**

019270010

2,5 Kg

**OIL-LESS reversible impact wrench, body made from aluminium alloy**

- No lubrication required
- Double hammer impulse device

Free speed	8.000 rpm
Max. torque	1.750 Nm
Bolt capacity	Cl 8.8 M24●36 mm
Bolt capacity	Cl 12.9 M20●30 mm
Air inlet	1/4" GAS
Operating pressure	6,2 bar
Internal hose size (Ø)	10 mm
Mean air consumption	198 l/min



## 4 TIMES THE USEFUL LIFE OF A TRADITIONAL IMPACT WRENCH



Based on these hallmarks, the **OIL-LESS impact wrench** can boast an excellent cost/benefit ratio, thus translating into savings in the long run.


**1927E**

019270005 2,4 kg

**NEW!**


## 12" Reversible impact wrench, made from composite material

- Double hammer impulse device
- Reverse control knob
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle



Free speed	rpm	7.000
Impulse device		Double hammer
Max. torque	Nm	750
Bolt capacity	Cl 8.8	M22●36 mm
Bolt capacity	Cl 12.9	M18●30 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	140



**1927C**

019270006 2,4 kg

**NEW!**


## 12" Reversible impact wrench, made from composite material

- Double hammer impulse device
- Lightweight and well-balanced, for enhanced ease of use
- Reverse control lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle



Free speed	rpm	9.000
Impulse device		Double hammer
Max. torque	Nm	950
Bolt capacity	Cl 8.8	M22●34 mm
Bolt capacity	Cl 12.9	M18●27 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	125





**1927P**

019270008


2 kg

**12"** *Reversible impact wrench*

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle

**1750 Nm**

Free speed	rpm	7.500
Impulse device		Double hammer
Max. torque	Nm	<b>1750</b>
Bolt capacity	Cl 8.8	M24●36 mm
Bolt capacity	Cl 12.9	M20●30 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	290

**1927P/K3**

019270118

4 kg



*Reversible impact wrench, supplied with 3 impact sockets, in plastic case*

720LC  
17-19-21 mm

350x305x86 mm

**1927XM**


019270030

1,3 kg

**12"** *Compact reversible impact wrench*

- Single hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook

Free speed	rpm	10.000
Impulse device		Single hammer
Max. torque	Nm	<b>770</b>
Bolt capacity	Cl 8.8	M22●34 mm
Bolt capacity	Cl 12.9	M18●27 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	122

**1927XM/K5**

019270129

2,8 kg



*Assortment of 1 compact reversible impact wrench and 5 impact sockets, in plastic case*

720 17-19-  
21-22-24 mm

307x206x86 mm

**1928XM**

019280030


1,3 kg

**3/4"** *Compact reversible impact wrench*

- Double hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle

**1600 Nm**

Free speed	rpm	4.800
Impulse device		Double hammer
Max. torque	Nm	<b>1600</b>
Bolt capacity	Cl 8.8	M27●41 mm
Bolt capacity	Cl 12.9	M24●36 mm
Air inlet	GAS	3/8"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	175



**ULTRA COMPACT AND POWERFUL**



## 1928P

019280006

3,7 kg



### 34" Reversible impact wrench, made from composite material

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle

Free speed	rpm	5.000
Impulse device		Double hammer
Max. torque	Nm	2100
Bolt capacity	Cl 8.8	M30●46 mm
Bolt capacity	Cl 12.9	M27●41 mm
Air inlet	GAS	3/8"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	221



**2100 Nm**  
**ULTRA COMPACT**  
**AND POWERFUL**

## 1930PA

019300032

9,6 kg



### 1" Reversible impact wrench

- Double hammer impulse device
- Auxiliary handle
- Reversible lever
- Three power adjustable screwing/unscrewing positions
- Exhaust through handle

Free speed	rpm	3.500
Impulse device		Double hammer
Max. torque	Nm	2445
Bolt capacity	Cl 8.8	M36●55mm
Bolt capacity	Cl 12.9	M30●46mm
Air inlet	GAS	1/2"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	13
Mean air consumption	l/min	350



## 1922P3

019220013

1,5 kg



### 12" Reversible air impact ratchets

- Double rocking dog" impulse device
- Easy tightening: The impact mechanism system eliminates wrist twisting at end of screwing and shortens operating time
- Compact and powerful: maximum torque is significantly higher than maximum torque as achieved with a conventional ratchet
- Ergonomic rubber handle

Free speed	rpm	600
Maximum torque	Nm	136
Bolt capacity	Cl 8.8	M12●18 mm
Bolt capacity	Cl 12.9	M10●16 mm
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	113



**136 Nm**  
**HIGH TORQUE**  
**WITHOUT**  
**AFFECTING WRIST**



## 720ME/C8

007200525

1 1/2"

8 impact socket drivers  
for hexagon screws



5-6-8-10-12-14-17-19 mm



270x120x45 mm

## 720LC/C3

007200653

1 1/2"

3 impact sockets for wheel nuts,  
with polymeric inserts

17-19-21 mm



148x132x44 mm

## 720/C12

007200912

1 1/2"

12 impact sockets

10-11-12-13-14-17-19-22-24-27-30-32 mm



195x80x55 mm

## 1933IH

019330006

800 g



High-power die grinder

- Collect chuck, Ø 3 mm and 6 mm



Free speed	rpm	20.000
Chuck capacity	mm	3-6
Power	kW	0,75
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	370

## 1933


019330001

380 g



Die grinder

- Collect chuck, Ø 3 mm and 6 mm



Free speed	giri/min	25.000
Chuck capacity	mm	3-6
Power	kW	0,20
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	10
Mean air consumption	l/min	230

## 1942A


019420000

550 g



Air saw

- Powerful and handy
- Designed for cutting bodies, exhaust pipes and silencers, aluminium and plastic
- Complete with rubber handle, PVC exhaust pipe and air-feeding hose
- Rear exhaust



Strokes per minute		10.000
Stroke length	mm	10
Air inlet	GAS	1/4"
Operating pressure	bar	6,2
Internal hose size (Ø)	mm	8
Mean air consumption	l/min	75

**1936/5A**

019360025

1,9 kg




### Angle grinder

- Extremely compact and handy
- Air governor for automatically controlling top speed
- Right-hand/left-hand auxiliary handle
- Spindle lock button
- Accessory for quickly changing discs
- Safety cap can be quickly adjusted in nine different positions through quick release
- Rear exhaust


**Ø 125 mm**

Free speed	rpm	10.000
Grinding disc size	mm	125
Power	CI 8.8	0,66
Spindle thread	CI 12.9	14
Air inlet	GAS	1/4"
Working pressure	bar	6,2
Ø internal hose size	mm	10
Mean air consumption	l/min	390


**1946**

019460001




### Air riveter

- Supplied with interchangeable nozzles, 2.4 - 3.2 - 4.0 - 4.8 mm long, a safety nail container and a balancing hook

Material/Riveter	2,4	3,2	4	4,8
Copper	✓	✓	✓	✓
Aluminium	✓	✓	✓	✓
Steel	✓	✓	✓	✓
Stainless steel	✓	✓	✓	✓

Traction power	8.000 N
Stroke length	14 mm
Maximum rivet capacity	Ø aluminium 4,8 mm
Air inlet	1/4" GAS
Operating pressure	6,2 bar
Internal hose size (Ø)	6 mm
Air consumption	1,2 l/cycles


**1946C 7,8**

019460008




### Automatic air suction riveter

- Professional air riveter for use with 2.4 - 3.2 - 4.0 - 4.8 mm long steel, stainless steel, aluminium and copper rivets
- Pointed cone-shaped spout
- Powerful and handy, with handle made of composite material
- Complete with safety nail container and oil gun

Material/Riveter	2,4	3,2	4	4,8
Copper	✓	✓	✓	✓
Aluminium	✓	✓	✓	✓
Steel	✓	✓	✓	✓
Stainless steel	✓	✓	✓	✓

Traction power	16.900 N
Stroke length	22,5 mm
Maximum rivet capacity	Ø stainless steel 7,8 mm
Air inlet	1/4" GAS
Operating pressure	6,2 bar
Internal hose size (Ø)	10 mm
Air consumption	4,9 l/cycles


**1949XS**

019490025




### Progressive blow pen

- Made from light alloy
- Air flow can be adjusted by rotating head



Threaded brass insert	1/4"
Operating pressure	3-8 bar
Maximum operating pressure	10 bar
Operating temperature	-20°C ÷ 70°C

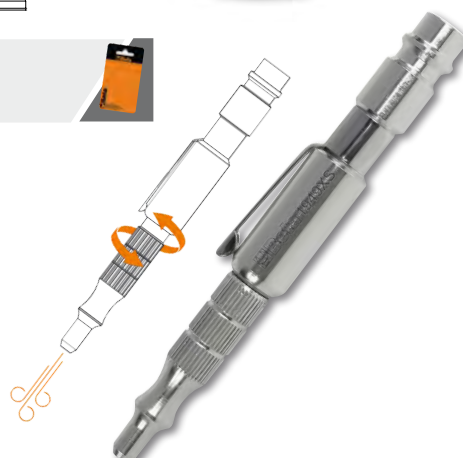





**SAFETY FOOTWEAR AND WORKWEAR  
SPRING/SUMMER COLLECTION**



**20  
25**

EU	35	36	37	38	39	40	41	42	43	44	45	46	47	47
UK	2,5	3,5	4,5	5	6	6,5	7	8	9	10	10,5	11	12	13

**RENEGADE****NEW!****THE NEW SAFETY FOOTWEAR RANGE****Renegade has been designed to provide uncompromising safety and style.**

The range, which comprises 6 models in unique colours and materials, perfectly suits those interested in standing out in any working environment. Renegade relies on a design inspired by latest generation sports shoes, superior cushioning and remarkable support to provide comfort all day long.

**INNOVATIVE DESIGN****HIGHLY BREATHABLE**

**EVA OUTSOLE WITH DURABLE NITRILE RUBBER TREAD WIDE FIT**

**THE WIDE BODY**

The wide body – 11 – ensures smooth, comfortable walks, without compressing the foot.

**QUICK LACING SYSTEM**

Model 7340VA is Beta's first shoe fitted with a quick lacing system.

**BASED ON A BOLD, UNCONVENTIONAL STYLE,**  
Renegade is an ideal pick for modern professionals.



**RENEGADE MATCHES PROTECTION WITH A CAPTIVATING, MODERN APPEARANCE.**

**METAL FREE**  
composite fibre  
penetration-proof insole

**7340VA**

**RENEGADE** mesh fabric shoe, highly breathable, with ATOP lacing

**S1PS FO SR HRO**

**Sizes available: from 37 to 48**  
from 073400537 to 073400548





RENEGADE



NEW!

7340G

RENEGADE mesh fabric shoe, highly breathable, with traditional lacing



Sizes available: from 37 to 48

from 073400637 to 073400648

S1PS FO SR HRO

7341V

RENEGADE woven fabric, hard-wearing and breathable, green details



Sizes available: from 37 to 48

from 073410537 to 073410548

S1PS FO SR HRO

7341Y

RENEGADE woven fabric shoe, hard-wearing and breathable, yellow details



Sizes available: from 37 to 48

from 073410637 to 073410648

S1PS FO SR HRO

7342N

RENEGADE microfibre shoe, water-repellent



Sizes available: from 37 to 48

from 073420537 to 073420548

S3S FO SR HRO

7343N

RENEGADE microfibre ankle shoe, water-repellent



Sizes available: from 37 to 48

from 073430537 to 073430548

S3S FO SR HRO

# FitEvolution

Seven uniquely designed models, available in several colours and materials, ranging from mesh to microfibre, to satisfy the most demanding users' requirements.

## THE PATENTED SYSTEM BETA FIT4YOU

TO CUSTOMIZE COMFORT  
IN THEIR SAFETY FOOTWEAR.

After several years of painstaking studying and designing, we developed the patented system, **FIT 4 YOU**. This state-of-the-art penetration-proof insole pressing process allows three different **ETPU** inserts – each with different densities – to be combined, to provide three levels of comfort, thus satisfying every user's requirements.



### ETPU Inserts

ETPU is the core of the FIT 4 YOU system, ensuring a cushioning effect and energy return. Based on three provided inserts varying in density and colour, it allows both softness and support to be customized in the shoe, according to weight, height and personal requirements. This groundbreaking technology ensures optimal comfort while moving as well as during static breaks, thereby resulting in reduced joint stress and fatigue.



The patented system, **FIT 4 YOU**, is based on **3 provided ETPU** inserts, varying in density and colour, to allow the user to customize the shoe according to weight, height and personal usage requirements.



- Composite toe cap
- Composite fibre penetration-proof insole
- 3 ETPU inserts, with 3 different densities, for a customized shoe
- Heel stability support and traditional lacing.
- Dual-density polyurethane outsole

7272V

FitEvolution woven fabric shoe,  
hard-wearing and highly breathable

S1 PS FO SR ESD



Sizes available: from 37 to 48  
from 072720137 to 072720148



**7270Y**Fit**Evolution** mesh fabric shoe, highly breathable**S1 PS FO SR ESD**
**Sizes available: from 37 to 48**  
 from 072700137 to 072700148
**7271V**Fit**Evolution** suede shoe, perforated**S1 PS FO SR ESD**
**Sizes available: from 37 to 48**  
 from 072710137 to 072710148
**7273G**Fit**Evolution** nubuck shoe, water-repellent**S3 S FO SR ESD**
**Sizes available: from 37 to 48**  
 from 072730137 to 072730148
**7274G**Fit**Evolution** nubuck ankle shoe, water-repellent**S3 S FO SR ESD**
**Sizes available: from 37 to 48**  
 from 072740237 to 072740248
**7275N**Fit**Evolution** microfibre shoe, water-repellent**S3 S FO SR ESD**
**Sizes available: from 37 to 48**  
 from 072750237 to 072750248
**7276N**Fit**Evolution** microfibre ankle shoe, water-repellent**S3 S FO SR ESD**
**Sizes available: from 37 to 48**  
 from 072760237 to 072760248

**O-Gravity**


- EVA outsole with durable nitrile rubber tread
- Heel stability support
- Composite fibre penetration-proof insole

# EXTREMELY LIGHT

## LESS THAN 500 g

APPROXIMATE WEIGHT FOR SIZE 42

**7352B**

450 g

**O-Gravity mesh fabric shoe, highly breathable, with TPU inserts**

- Composite toe cap
- Stretch slip-on collar


**S1P HRO SRC**


Sizes available: from **38** to **48**

from 073520138 to 073520148

**7352G**

450 g

**O-Gravity ultralightweight mesh fabric shoe, highly breathable**

- Composite toe cap
- Traditional lacing
- Wide fit


**S1P HRO SRC ESD**


Sizes available: from **38** to **48**

from 073520338 to 073520348


**7354N**

460 g

**O-Gravity lightweight mesh fabric shoe, waterproof**

- Composite toe cap
- Stretch slip-on collar


**S3 HRO SRC**


Sizes available: from **38** to **48**

from 073540038 to 073540048

**7356G**

460 g

**O-Gravity shoe, ultralightweight, made of water-repellent microfibre**

- Composite toe cap
- Stretch slip-on collar


**S3 HRO SRC**


Sizes available: from **38** to **48**

from 073560038 to 073560048

**7372B**

450 g

**O-Gravity woven fabric shoe, ultralightweight, hard-wearing and ultrabreathable**

- Composite toe cap
- Stretch slip-on collar


**S1P HRO SRC**


Sizes available: from **38** to **48**

from 073720038 to 073720048



## ACTIVE



- Composite toe cap
- Composite fibre penetration-proof insole

## 7316NB

*Mesh and suede shoe, highly breathable, with heel stability support*



S1P SRC ESD



Sizes available: from 35 to 48

from 073160735 to 073160748

## 7316NG

*Mesh and suede shoe, highly breathable, with heel stability support*



S1P SRC ESD



Sizes available: from 35 to 48

from 073160635 to 073160648

## 7320NA

*Nubuck shoe, water-repellent, with anti-abrasion reinforcement in toe cap area*



S3 SRC

Sizes available: from 35 to 48

from 073200535 to 073200548

## 7321NA

*Nubuck shoe, water-repellent, with quick opening system and antiabrasion reinforcement in toe cap area*



**QUICK  
OPENING  
SYSTEM**

S3 SRC RS

Sizes available: from 35 to 48

from 073210535 to 073210548

## 7322SA

*Fabric shoe, highly resistant to abrasion*



S3 SRC

Sizes available: from 35 to 48

from 073220435 to 073220448

## 7317NA

*Suede shoe, perforated, with microfibre reinforcement in heel area*



S1P SRC

Sizes available: from 35 to 48

from 073170135 to 073170148

# FLEX



- Composite toe cap
- Composite fibre penetration-proof insole

## THE MOST FLEXIBLE

**7212B**

490 g

Suede shoe, perforated, with mesh inserts.  
Anti-abrasion insert in toe cap area


**S1P SRC ESD**

**Sizes available: from 35 to 48**

from 072120235 to 072120248

**7212G**

490 g

Suede shoe, perforated.  
With anti-abrasion insert in toe cap area.


**S1P SRC ESD**

**Sizes available: from 35 to 48**

from 072120335 to 072120348

**7213G**

490 g

Suede shoe, perforated, with highly breathable mesh inserts


**S1P SRC ESD**

**Sizes available: from 35 to 48**

from 072130135 to 072130148

**7214G**

500 g

Action nubuck shoe, water-repellent, with anti-abrasion insert in toe cap area


**S3 SRC ESD**

**Sizes available: from 35 to 48**

from 072140235 to 072140248

**7218G**

550 g

Water-repellent action nubuck ankle shoe


**S3 SRC RS ESD**


**QUICK  
OPENING  
SYSTEM**

**Sizes available: from 35 to 48**

from 072180135 to 072180148



## BASIC

EN ISO  
20345  
2022

NEW!

- Steel toe cap
- Steel penetration-proof insole

## NEW LOOK!

7241NC

Leather safety shoe, water-repellent



S3 FO SR

Sizes available: from 35 to 48

from 072411635 to 072411648

7243NC

Leather ankle shoe, water-repellent, with quick opening system



S3 FO SR RS

Sizes available: from 35 to 48

from 072431635 to 072431648

7246NB

Suede shoe, perforated



S1P FO SR

Sizes available: from 35 to 48

from 072461635 to 072461648

7248NB

Suede ankle shoe



S1P FO SR RS

QUICK OPENING  
SYSTEM

Sizes available: from 35 to 48

from 072481635 to 072481648

7245NB

Leather ankle shoe, water-repellent, with quick opening system and front protection with strap closure



S3 FO SR RS

Sizes available: from 35 to 48

from 072451635 to 072451648

QUICK OPENING  
SYSTEM

# NEW LOOK

**7982N**

079820000

**Curved visor Cap,**  
100% polyester, strap closure black


**7643G**
**NEW!**

## Sweatshirt

- Short-zipped, 80% cotton, 20% polyester, 280 g/m<sup>2</sup>, a anthracite/light grey



	XS	S	M	L	XL	2XL	3XL
	076430000	076430001	076430002	076430003	076430004	076430005	076430006

**7820SG**
**NEW!**

## Stretch work trousers, multipocket style,

- 39% cotton, 61% polyester,
- Mechanical stretch ripstop fabric, 170 g/m<sup>2</sup>
- Grey knee
- Pad pockets and stretch waistband on sides
- Regular fit



	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	078200100	078200101	078200102	078200103	078200104	078200105	078200106


**7821SG**
**NEW!**

## Stretch work Bermuda shorts

- Multipocket style, 39% cotton, 61% polyester,
- Mechanical stretch ripstop fabric, 170 g/m<sup>2</sup>,
- Stretch waistband on sides
- Regular fit



	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	078210100	078210101	078210102	078210103	078210104	078210105	078210106


**7340VA** **NEW!**

Renegade 96



# MAXIMUM COMFORT

## 7669N

**Stretch work jacket, lightweight, multipocket style,**

- 86% nylon, 14% spandex, 140 gm<sup>2</sup>, black
- With detachable sleeves and retractable hood.
- Water-resistant, wind-stopping



	XS	S	M	L	XL	2XL	3XL
	076690000	076690001	076690002	076690003	076690004	076690005	076690006

## 7664N

**Sweatshirt, long-zipped**

- 280 g/m<sup>2</sup>, black 60% cotton, 40% polyester



	XS	S	M	L	XL	2XL	3XL
	076640000	076640001	076640002	076640003	076640004	076640005	076640006

## 7660

**Stretch work trousers, lightweight, multipocket style**

- 86% nylon - 14% spandex, 140 g/m<sup>2</sup>, anthracite grey
- Knee pad pockets, rear pockets reinforced in polyester 300D, tearproof crotch
- Slim fit



**SLIM FIT**

	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
7660G	076600000	076600001	076600002	076600003	076600004	076600005	076600006
7660B	076600100	076600101	076600102	076600103	076600104	076600105	076600106

## 7661

**Stretch work Bermuda shorts, lightweight, multipocket style**

- 86% nylon - 14% spandex, 140 g/m<sup>2</sup>, anthracite grey



**SLIM FIT**



	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
7661G	076610000	076610001	076610002	076610003	076610004	076610005	076610006
7661B	076610100	076610101	076610102	076610103	076610104	076610105	076610106

## 7275N

FitEvolution 99



7552

NEW!

Technical polo shirt, Ho-Cooling®  
190 g/m²  
three-button



**7552BL**  
Blue



**7552G**  
Melange grey



**7552N**  
Black

100% COTTON

		XS	S	M	L	XL	2XL	3XL
<b>7552BL</b>		075520300	075520301	075520302	075520303	075520304	075520305	075520306
<b>7552G</b>		075520400	075520401	075520402	075520403	075520404	075520405	075520406
<b>7552N</b>		075520500	075520501	075520502	075520503	075520504	075520505	075520506

7553

NEW!

Work t-shirt made from jersey cotton, 150 g/m²



**7553G**  
Grey



**7553V**  
Sage green



**7553BL**  
Blue



**7553N**  
Black

100% COTTON


		XS	S	M	L	XL	2XL	3XL
<b>7553BL</b>		075530300	075530301	075530302	075530303	075530304	075530305	075530306
<b>7553G</b>		075530400	075530401	075530402	075530403	075530404	075530405	075530406
<b>7553N</b>		075530500	075530501	075530502	075530503	075530504	075530505	075530506
<b>7553V</b>		075530600	075530601	075530602	075530603	075530604	075530605	075530606



7548M

Modern print t-shirt, 100% cotton,  
150 g/m<sup>2</sup>




	XS	S	M	L	XL	2XL	3XL
	075480400	075480401	075480402	075480403	075480404	075480405	075480406

7548C

Classic print t-shirt, 100% cotton,  
150 g/m<sup>2</sup>





	XS	S	M	L	XL	2XL	3XL
	075480500	075480501	075480502	075480503	075480504	075480505	075480506

7550

Technical work t-shirt, made from polyester, 120 g/m<sup>2</sup>,  
with 37.5® technology,

- grey with black, orange and reflex details



		XS	S	M	L	XL	2XL	3XL
7550G		075500400	075500401	075500402	075500403	075500404	075500405	075500406
7550N		075500500	075500501	075500502	075500503	075500504	075500505	075500506

PATENTED 37.5®  
HYPOALLERGENIC, SKIN-FRIENDLY TECHNOLOGY.

# BEST SELLER

## 7867

Sleeveless work jacket, lightweight, in T/C twill, 180 g/m<sup>2</sup>

- 65% polyester, 35% cotton, 180 g/m<sup>2</sup>

**Beta EASY LIGHT**



		XS	S	M	L	XL	2XL	3XL	4XL	5XL
<b>7867B</b>		078670700	078670701	078670702	078670703	078670704	078670705	078670706	078670707	078670708
<b>7867G</b>		078670800	078670801	078670802	078670803	078670804	078670805	078670806	078670807	078670808

## 7553N

**NEW!**

Work t-shirt work, made from jersey cotton, 150 g/m<sup>2</sup> 106

## 7860

Work trousers in T/C twill, 180 g/m<sup>2</sup>, **Beta EASY LIGHT**

- T/C twill, 65% polyester, 35% cotton; 180 g/m<sup>2</sup>
- T/C ripstop insets and knee pads
- Strap "Oxford" snap loop



## 7861



Work bermuda shorts, lightweight,

- made from T/C twill, 180 g/m<sup>2</sup>, with Oxford inserts

**Beta EASY LIGHT**



		XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58	4XL   60	5XL   62
<b>7860B</b>		078600700	078600701	078600702	078600703	078600704	078600705	078600706	078600707	078600708
<b>7860G</b>		078600800	078600801	078600802	078600803	078600804	078600805	078600806	078600807	078600808
<b>7861B</b>		078610700	078610701	078610702	078610703	078610704	078610705	078610706	078610707	078610708
<b>7861G</b>		078610800	078610801	078610802	078610803	078610804	078610805	078610806	078610807	078610808

## 7865



Work overalls, lightweight,

- 65% polyester, 35% cotton
- Oxford inserts

**Beta EASY LIGHT**



		XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58	4XL   60	5XL   62
<b>7865B</b>		078650700	078650701	078650702	078650703	078650704	078650705	078650706	078650707	078650708
<b>7865G</b>		078650800	078650801	078650802	078650803	078650804	078650805	078650806	078650807	078650808



## 7246NB

**NEW!**

Basic 103



# CASUAL LOOK

## 7642G

### Crew-neck sweatshirt

- 60% cotton, 40% polyester, 240 g/m<sup>2</sup>



	XS	S	M	L	XL	2XL	3XL
	076420000	076420001	076420002	076420003	076420004	076420005	076420006

## 7984G

079840525



### Work belt, 100% TPE, with chrome-plated zinc metal buckle

One size fits all; length: 125 cm, can be shortened; width: 35 mm, black

## 7610



### "Work trekking" trousers, LIGHT

- 90% nylon, 10% stretch fabric, 140 g/m<sup>2</sup>
- Reinforced fabric on knees and back, stretch leg bottoms and drawstring
- Dark grey with yellow details
- Slim fit

**SLIM FIT**



**TREKKING**  
LIGHT

	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
7610G	076100000	076100001	076100002	076100003	076100004	076100005	076100006
7610N	076100100	076100101	076100102	076100103	076100104	076100105	076100106

## 7611G



### "Work trekking" Bermuda shorts, LIGHT

- 90% nylon, 10% stretch fabric, 140 g/m<sup>2</sup>
- Reinforced fabric on back
- Dark grey with yellow details

**SLIM FIT**



**TREKKING**  
LIGHT

	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	076110000	076110001	076110002	076110003	076110004	076110005	076110006



7270Y

FitEvolution 99

# COTTON LINE

**7937MG**

## Sleeveless work jacket

- Front zip closure, flap-covered with strap closure
- Anti-abrasion inserts made from "Oxford" polyester/PU, 220 g/m<sup>2</sup>
- Chest pockets with strap closure and pen pocket
- Large waist pockets with strap closure
- Adjustable waistband with strap



Cotton

	XS	S	M	L	XL	2XL	3XL
	079370400	079370401	079370402	079370403	079370404	079370405	079370406

**7553N**
**NEW!**

Work t-shirt work, made from jersey cotton, 150 g/m<sup>2</sup> 106

**7930MG**


## Work trousers, multipocket style

- Knee pad inserts with strap closure

Cotton

	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	079300400	079300401	079300402	079300403	079300404	079300405	079300406

**7931MG**

## Work bermuda shorts

- 97% cotton, 3% stretch fabric, 220 g/m<sup>2</sup>



Cotton

	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	079310400	079310401	079310402	079310403	079310404	079310405	079310406

**7935MG**

## Work overalls

- Front closure with double tap zipper slider
- Collar with strap closure
- Cuffs with strap adjusters
- Knee pad inserts with strap closure



Cotton

	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	079350400	079350401	079350402	079350403	079350404	079350405	079350406

**7340G**
**NEW!**

Renegade 97



## 7830SN



### Stretch work trousers

- in T/C twill, 200 g/m<sup>2</sup>, black



**SLIM FIT**



	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58
	078300100	078300101	078300102	078300103	078300104	078300105	078300106

## 7850G



### Cargo work trousers, 100% cotton, 240 g/m<sup>2</sup>,

- Stretch waistband on sides and large side pockets with reflex inserts
- Grey with fluorescent green details
- Slim fit

**SLIM FIT**



	XS   46	S   48	M   50	L   52	XL   54	2XL   56	3XL   58	4XL   60
	078500100	078500101	078500102	078500103	078500104	078500105	078500106	078500107

## 7527

### Work jeans

- 70% cotton, 27% polyester and 3% stretch fabric



*Jeans*

	XS	S	M	L	XL	2XL	3XL
	075270046	075270048	075270050	075270052	075270054	075270056	075270058



## 7529

### Stretch work jeans bermuda shorts

- 98% cotton, 2% stretch fabric



*Jeans*

	XS	S	M	L	XL	2XL	3XL
	075290046	075290048	075290050	075290052	075290054	075290056	075290058



**7317NA**  
Active  101



**9563G**

095630050

**Office armchairs, for guests**

- Back height: 60 cm
- Seat dimensions: 45 cm x 51 cm
- Overall chair height: 110-120 cm
- Base: 28 cm (leg length)  
x 50-60 cm (height)



**9563U**

095630020

**Office armchair, ergonomic**

- Back height: 97 cm
- Seat dimensions: 50 cm x 53 cm
- Overall chair height: 133-144 cm
- Base: 35 cm (leg length)  
x 49 cm (height)



**9592MG/3**

095920103

**Case with three black  
full graphite pencils**



**NEW!**



**9527T**

**NEW!**

095270030

**Black ceramic cup  
with lasered  
BETA logo**



**9523T**

095230050

**Thermal bottle, made of  
stainless steel, 500 ml,  
double-layer technology,  
no air between walls,  
leak-proof cap, orange**

- keeps cold drinks cold for 24 hours
- keeps hot drinks hot for 12 hours



**9528C**

**NEW!**

095280100

**Football, PU-coated,  
size 5**

- circumference: 68-70 cm
- panels: 12
- weight: 410-430 g
- recommended  
pressure:  
6-8 lbs/ 0.41-0.55 bar/  
6-8 psi



**9544C**

095440101

**Cabin-size trolley  
with 4 double wheels,  
TSA lock, USB port  
+ 3.5-mm jack**

40x20x55 mm



**9525TR**

095250011

**Trucker cap with curved visor**

- 50% cotton,  
50% polyester,  
rear mesh,  
snapback style,  
black



**9574**



**Work gloves**



		M	L	XL	2XL
9574B		095740102	095740103	095740104	095740105
95740		095740202	095740203	095740204	095740205



# Beta

## RSC 55



**MODULAR  
SYSTEM**



**Configure  
your workshop  
in 3D online**







## 2024 MOT2 WORLD CHAMPIONSHIP

ALONSO LÓPEZ

FERMÍN ALDEGUER

998016118



8 054809 675244

Beta Utensili S.p.A.

via Volta, 18 | 20845 Sovico (MB) - tel +39 039 20771 | [www.beta-tools.com](http://www.beta-tools.com)