





- Te gebruiken in combinatie met trekkers 1533.
- Wigeffect, door het aandraaien van de separator messen wordt het werkstuk eerst opgetild.
- Groot contactoppervlak om het verwijderen van kwetsbare onderdelen zoals poelies, lagere en busse te vergemakkelijken.

A max
mm

	Art.		A min+Max	L1	L2 mm	L mm	● mm	⚖ g
015340001	1534/1	1533/2	5+60	63	84	125	17	403
015340002	1534/2	1533/2	12+75	75	100	150	19	737
015340003	1534/3	1533/3	22+115	118	150	195	24	1767
015340004	1534/4	1533/4	25+155	154	195	275	30	3977
015340006	1534/5A	1533/5A	30+220	180	228	410	36	9700

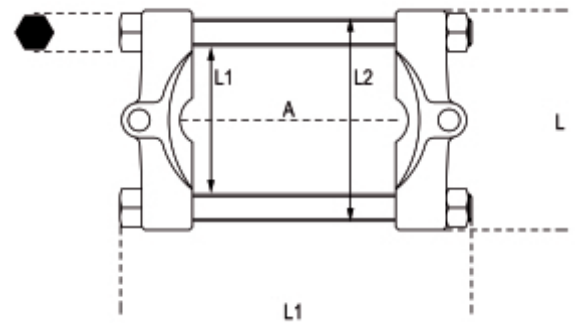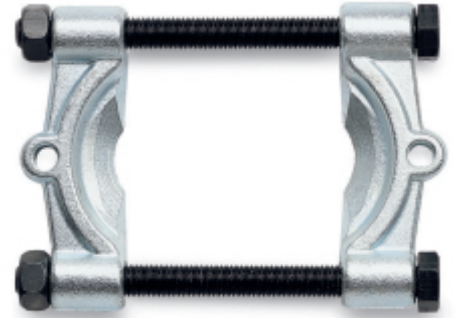

Scan de QR-code om toegang te krijgen tot het
Specificaties, media en documentatie in één klik.

