





Material: polyamide PA 6.6
 Self-extinguishing class: UL 94-V2
 Working temperature: -40 °C ÷ +85 °C
 Minimum installation temperature: -10 °C
 Resistance to chemicals: Good resistance to bases, oils, greases, chloride solvents. Limited resistance to acids. Not resistant to phenols
 Reference standards: EN 62275:2015-02
 Classification: type 1 (EN); type 21 (UL)

Please indicate number of cable ties, and not of packages, in your order

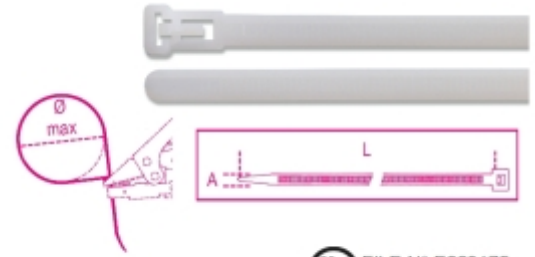

	Art.	A mm	L mm	Ø MAX mm	F MAX N
BMBR1576	BMBR1576	7.6	150	40	230
BMBR2076	BMBR2076	7.6	200	55	230
BMBR3076	BMBR3076	7.6	300	82	230

Scan the QR Code to access the web tab
 Specs, media and documentation in one click.

