



**1748-SC**
**Self-locking stainless steel cable ties, black polyester coating**

CE

Material: stainless steel AISI 304 + polyester  
 Locking device: roller ball type  
 Self-extinguishing class: non-flammable  
 Plenum rating: AH-1  
 UV resistance: excellent  
 Working temperature: -60 °C ÷ +300 °C  
 Minimum installation temperature: -60 °C  
 Resistance to chemicals: excellent  
 Reference standards: EN 62275:2015-02  
 Classification: type 2 (EN); type 2 (UL)

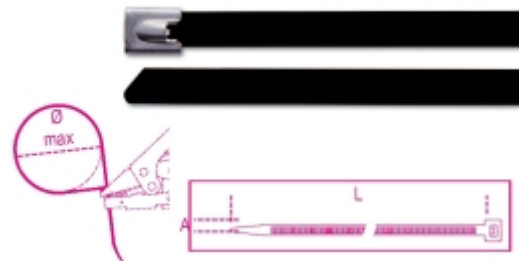

	art.	A mm	L mm	ØMAX mm	Trazione N
<b>BMSC1345</b>	BMSC1345	4.6	125	38	450
<b>BMSC2045</b>	BMSC2045	4.6	200	61.9	450
<b>BMSC2079</b>	BMSC2079	7.9	200	61.9	800
<b>BMSC3045</b>	BMSC3045	4.6	290	90.6	450
<b>BMSC3079</b>	BMSC3079	7.9	300	90.6	800
<b>BMSC3745</b>	BMSC3745	4.6	360	112.8	450
<b>BMSC3779</b>	BMSC3779	7.9	360	112.8	800
<b>BMSC5079</b>	BMSC5079	7.9	520	163.8	800
<b>BMSC5245</b>	BMSC5245	4.6	520	163.8	450
<b>BMSC6845</b>	BMSC6845	4.6	680	214.8	450
<b>BMSC6879</b>	BMSC6879	7.9	680	214.8	800
<b>BMSC8445</b>	BMSC8445	4.6	840	265.7	450
<b>BMSC8479</b>	BMSC8479	7.9	840	265.7	800