



**1748-S**
**Self-locking stainless steel cable ties**

CE

Material: stainless steel AISI 304  
 Locking device: roller ball type  
 Self-extinguishing class: non-flammable  
 Plenum rating: AH-1  
 UV resistance: excellent  
 Working temperature:  $-60\text{ }^{\circ}\text{C} \div +300\text{ }^{\circ}\text{C}$   
 Minimum installation temperature:  $-60\text{ }^{\circ}\text{C}$   
 Resistance to chemicals: excellent  
 Reference standards: EN 62275:2015-02  
 Classification: type 2 (EN); type 2 (UL)

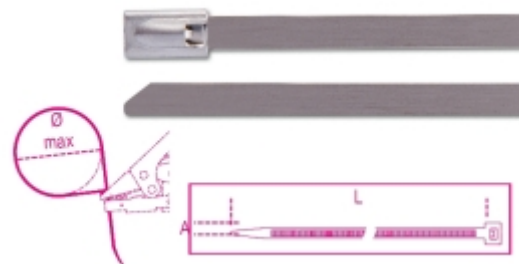

	art.	A mm	L mm	ØMAX mm	Trazione N
<b>BMS1345</b>	BMS1345	4.6	125	38	890
<b>BMS2045</b>	BMS2045	4.6	200	61.9	890
<b>BMS2079</b>	BMS2079	7.9	200	61.9	1500
<b>BMS3045</b>	BMS3045	4.6	290	90.6	890
<b>BMS3079</b>	BMS3079	7.9	300	90.6	1500
<b>BMS3745</b>	BMS3745	4.6	360	112.8	890
<b>BMS3779</b>	BMS3779	7.9	360	112.8	1500
<b>BMS5079</b>	BMS5079	7.9	500	163.8	1500
<b>BMS5245</b>	BMS5245	4.6	520	163.8	890
<b>BMS6845</b>	BMS6845	4.6	680	214.8	890
<b>BMS6879</b>	BMS6879	7.9	680	214.8	1500
<b>BMS8445</b>	BMS8445	4.6	840	265.7	890
<b>BMS8479</b>	BMS8479	7.9	840	265.7	1500