




BETA 2400 RSC24A/8-VIL
Mobile roller cabinet with eight drawers, with ANTI-TILT system and assortment of 411 tools



Features

Beta RSC24A/8: the evolution of the historical C24SA. Equipped with an ANTI-TILT system, it offers unrivalled safety for every job.

GUARANTEED WORK ORGANISATION

The trolley can be customised with a wide range of accessories to keep everything you need tidy and within easy reach at all times:

6 drawer heights 70 mm

RESISTANCE TO WEAR AND TEAR

Careful design and selection of materials make the RSC24A/8 a roller cabinet capable of assisting the work of any professional over the years.


ROBUSTNESS AND PRACTICALITY

The new structure withstands large weight loads without deforming. The mobility of the trolley is also improved by the practical handle incorporated in the structure.

GUARANTEED PROTECTION

With the ANTI-TILT system, the roller cabinet always remains stable, preventing accidents when opening several drawers. A must for those working with heavy tools or materials in quantity, ensuring a safer environment.

Dimensions

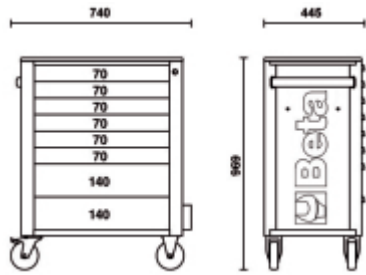

- 42: n. 18 combination wrenches 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 mm
90: n. 7 double ended offset ring wrenches 6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 mm
123Q1/4: n. 1 quick release adaptor, 1/4", for 10 mm ratcheting wrenches
123Q3/8: n. 1 quick release adaptor, 3/8", for 13 mm ratcheting wrenches
123Q1/2: n. 1 quick release adaptor, 1/2", for 19 mm ratcheting wrenches
142: n. 12 reversible ratcheting combination wrenches
1048N: n. 1 slip joint pliers, slip-proof PVC coated handles 250 mm
1128BMX: n. 1 electrician's scissors, straight blades
1032: n. 1 circlip pliers straight, internal □ 180 mm
1034: n. 1 circlip pliers bent, internal □ 170 mm
1036: n. 1 circlip pliers straight, external □ 175 mm
1038: n. 1 circlip pliers bent, external □ 175 mm
1052: n. 2 self - locking pliers 190-240 mm
1082GBM: n. 1 diagonal cutting nippers, bi-material handles, industrial finish □ 160 mm
1098: n. 1 construction worker's pincers 220 mm
1150GBM: n. 1 heavy duty combination pliers, bi-material handles, industrial finish □ 180 mm
1166GBM: n. 1 extra-long needle knurled nose pliers, bi-material handles, industrial finish □ 200 mm
1168GBM: n. 1 extra-long bent needle knurled nose pliers, bi-material handles, industrial finish □ 200 mm
410MIX/SEL19: n. 19
861/C100: n. 100 For manual, electric and pneumatic screwdrivers □ □ □ □ □ □ □ □ □ □
862F/A7: n. 7 □ 5,5-6-7-8-10-12-13 mm
862XP/A16: n. 16 Impact bits □ □ □ □ PH2(x2) - PH3 - PZ2(x2) - PZ3 - T20 - T25(x2) - T30(x2) - T40(x2) - 4 - 5 - 6 mm
1972/K20V-13BMC: n. 4
900: n. 13 1/4" hexagon sockets □ 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
900L: n. 9 hexagon hand sockets, long series □ 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
96BPC/SC9: n. 9 ball head offset hexagon key wrenches □ 1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
895/1: n. 1 socket holder
895/3: n. 1 socket holder
895/6: n. 1 socket holder
900ME: n. 5 1/4" socket drivers for hexagon screws □ 3-4-5-6-7 mm
900LP: n. 4 1/4" socket drivers for slotted head screws □ 0,8x4 - 1x5,5 - 1,2x6,5 - 1,2x8 mm
900PH: n. 4 1/4" socket drivers for cross head Phillips® screws □ PH1-PH2-PH3-PH4
900TX: n. 7 socket drivers for Torx® head screws □ T10 - T15 - T20 - T25 - T27 - T30 - T40
900/16: n. 1 adaptor, 1/4" female and 3/8" male drives E 1/4 - B 3/8
900/...: n. 3 1/4" drive extension bar 50-100-150 mm
900/25: n. 1 1/4" drive universal joint
900BG/31: n. 1 1/4" male square drive
900/42: n. 1 1/4" drive swivel T-handle
900/55: n. 1
910A: n. 17 3/8" hexagon hand sockets □ 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 mm
910/15: n. 1 adaptor, 3/8" female and 1/4" male drives E 3/8 - B 1/4
910/16: n. 1 adaptor, 1/2" female and 3/8" male drives E 3/8 - B 1/2
910/21: n. 1 3/8" extension bar 125 mm
910/22: n. 1 3/8" extension bar 250 mm
910/25: n. 1 3/8" drive universal joint
910/42: n. 1 3/8" drive sliding T - handle
910/55: n. 1
920A: n. 21 1/2" square drive hexagon sockets □ 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm
920/15: n. 1 adaptor, 1/2" female and 3/8" male drives E 1/2 - B 3/8
920/25: n. 1 1/2" drive universal joint
920AN: n. 2 1/2" wobble extension bar 125 - 250 mm
920/42: n. 1 1/2" drive sliding T-handle
920/55: n. 1
956E: n. 3 3/8" square drive spark plug sockets □ 16 - 17,8 - 20,8 mm
1256/C36-2: n. 36 microscrewdriver with 36 interchangeable 4-mm bits and magnetic extension
1221: n. 6 Screwdrivers for slotted head screws □ 2,5x50 - 3x75 - 4x100 - 5,5x125 - 6,5x150 - 8x200 mm
1221N: n. 1 Screwdrivers for slotted head Phillips® screws □ PH0x60 - PH1x80 - PH2x100 - PH3x150 mm
1222: n. 4 Screwdrivers for cross head Phillips® screws □ PH0x60 - PH1x80 - PH2x100 - PH3x150 mm

[illegible]