



BETA 3008M

Manual jack and positioner for truck wheels

HIGH CHARGING CAPACITY

Equipped with a maximum loading capacity of 136 kg, this device is designed to facilitate the lifting and handling of large tyres. The presence of a thicker frame, together with reinforcements applied in the welding areas, gives this device a high degree of robustness and solidity.

FUNCTIONAL

Oscillating rollers greatly facilitate wheel alignment with the hubs pins, proving particularly effective for both commercial and industrial vehicles.

Double wheels improve the handling of the tyre, making it easier to handle

ERGONOMIC

The structural conformation together with the rubber-covered handle are designed to minimise pressure on the hands during use



SOLID GRIP


The rubber handle provides a stable and secure grip



EASE OF SLIDING

The two rollers at the base allow the tyre to slide easily while working

Dimensions

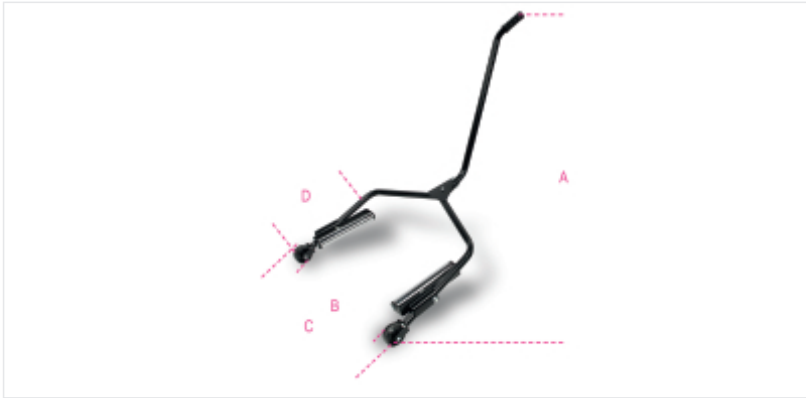

Coded items

	Art.	A	B	C	D	E
030080210	3008M	1300	600	700	260	600

Scan the QR Code to access the web tab
Specs, media and documentation in one click.

