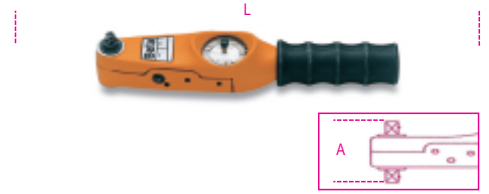


590 - 592
**chiavi dinamometriche a lettura diretta adatte a serraggi destrorsi e sinistrorsi
 precisione di serraggio $\pm 4\%$**
UNI EN ISO 6789


art.	Nm	Kgfm	lbf.in	■	A mm	L mm	█ kg	
005900001	590	0,8÷4	0,08÷0,4	7+35	1/4	60	253	0,52
005900003	590/1	2,5+12,5	0,25+1,25	21+110	1/4	60	253	0,52
005920005	592/3	5+25	0,5+2,5	44+220	3/8	70	253	0,52
005920007	592/4	8+40	0,8÷4	72+360	3/8	70	253	0,52