


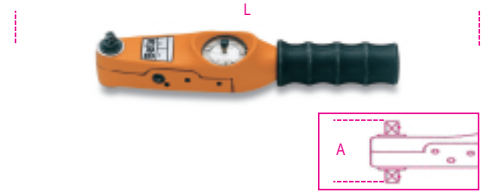

590 - 592
Klucze dynamometryczne zegarowe, dokładność: $\pm 4\%$
UNI EN ISO 6789

 Nm
 Kgfm
 lbf.in
 ■
 A
 mm
 L
 mm
 ■
 kg


|  | art. | Nm | Kgfm | lbf.in | ■ | A mm | L mm | ■ kg |  |
|---|-------|----------|-----------|--------|-----|---------|---------|---------|---|
| 005900001 | 590 | 0,3÷4 | 0,03÷0,4 | 3÷35 | 1/4 | 60 | 253 | 0,52 | 0,1 |
| 005900003 | 590/1 | 0,5÷13,5 | 0,05÷1,35 | 4÷120 | 1/4 | 60 | 253 | 0,52 | 0,5 |
| 005920005 | 592/3 | 1÷27 | 0,1÷2,7 | 10÷240 | 3/8 | 70 | 253 | 0,52 | 1,0 |
| 005920007 | 592/4 | 3÷40 | 0,3÷4 | 20÷360 | 3/8 | 70 | 253 | 0,52 | 1,0 |