





596 - 598
Mérőtárcsás nyomatékkulcs Jobbos és balos Pontosság: $\pm 4\%$
UNI EN ISO 6789

A meghatározott meghúzási nyomaték elérésekor fényjelzésen kívül hangjelzést is ad.

Nm
Kgfm
lbf.ft
■
A
mm
L
mm
kg

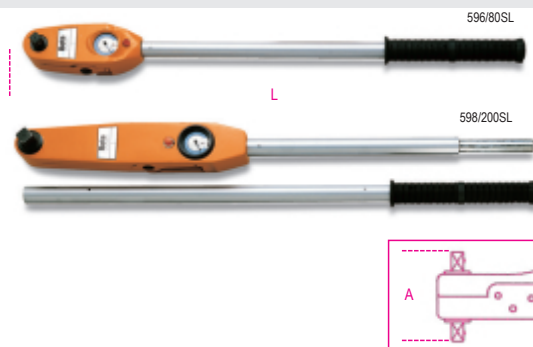

	art.	Nm	Kgfm	lbf.ft	■	A mm	L mm	 kg	
005960010	596/40SL	80÷400	8÷40	60÷300	3/4	111	710	3,2	10
005960020	596/80SL	40÷800	4÷80	20÷600	3/4	115	1025	4,85	20
005980022	598/200SL	200÷2000	20÷200	150÷1500	1"	135	1930	16,70	50