

599DGT/30

electronic direct reading torque wrench, for right-hand and left-hand tightening, torque accuracy: $\pm 2\%$ / $\pm 3\%$

CE

UNI EN 26789

buzzer and LED indicator for pre-settable target torque

• Power supply: 2 1.5V batteries (included)

Measuring range: 68÷340 Nm

Male square drive: 1/2"

Accuracy: +/- 2% clockwise, +/- 3% anticlockwise

Reversible ratchet

For right-hand and left-hand tightening

LCD display

User-friendly symbols and easy-to-read measuring data

Unit of measurement: Nm, ft.lb, in.lb, kgcm

Operation mode: Peak hold / Track

Dual approaching/stopping signal

Green LEDs and, later, red LEDs matched with a buzzer inform user that set torque has been reached.

Green LEDs are on when 90% of torque has been reached (warning signal).

Red LEDs are on when preset torque is reached (stop signal).

Buzzer: easy to set

Buttons allow impact wrench to set in a quick, user-friendly manner.

Arrow buttons: torque selection


U/S button: for setting unit of measurement and operation mode


C button: On/Reset

Antislip handle

Bimaterial translates into enhanced operating comfort

Power supply: 2 AA 1.5V batteries (included)

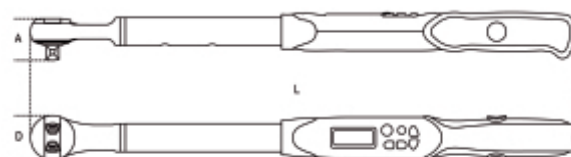

		art.
	005990030	599DGT/30