


599DGT/6
**electronic direct reading torque wrench, for right-hand and left-hand tightening,
 torque accuracy: $\pm 2\%$ / $\pm 3\%$**
UNI EN 26789

buzzer and LED indicator for pre-settable target torque
 • Power supply: 2 1.5V batteries (included)

Measuring range: 12÷60 Nm
 Male square drive: 1/2"
 Accuracy: +/- 2% clockwise, +/- 3% anticlockwise
 Reversible ratchet
 For right-hand and left-hand tightening
 LCD display
 User-friendly symbols and easy-to-read measuring data
 Unit of measurement: Nm, ft.lb, in.lb, kgcm
 Operation mode: Peak hold / Track
 Dual approaching/stopping signal
 Green LEDs and, later, red LEDs matched with a buzzer inform user that set torque has been reached.
 Green LEDs are on when 90% of torque has been reached (warning signal).
 Red LEDs are on when preset torque is reached (stop signal).
 Buzzer: easy to set
 Buttons allow impact wrench to set in a quick, user-friendly manner.
 Arrow buttons: torque selection
 U/S button: for setting unit of measurement and operation mode
 C button: On/Reset
 Antislip handle
 Bimaterial translates into enhanced operating comfort
 Power supply: 2 AA 1.5V batteries (included)

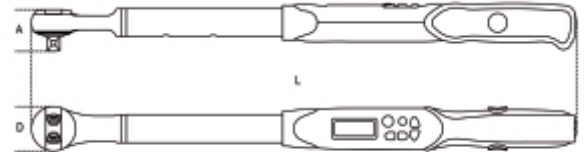

		art.
	005990003	599DGT/6