

## Click-type torque wrench for right-hand tightening



UNI EN ISO 6789

The wrench that does not require releasing tension after use. 100% Italian-made, it is ideal for controlled tightening of screws/bolts.

**ZERO-RESET TECHNOLOGY:** Based on higher-performance materials and improved heat treatment of both the spring and the component parts of the adjustment system, the wrench no longer requires releasing tension after use.  
**EASY SETTINGS:** The graduated vernier scale allows minimum interval fractions to be set up (in tenths of Nm).

**IMPROVED VISIBILITY:** Double graduation in Nm for clearer, simpler torque visibility.

**100% ITALIAN-MADE:** Entirely designed and manufactured in Italy, assembled, tested and certified at Beta's Dynalab, at our headquarters in Sovico, which translates into top-quality torque wrenches.

**WIDE RANGE:** The range comprising 7 wrenches allows tightening from 5 Nm to 300 Nm, with 1/4" to 1/2" male square drives.


**REVERSIBLE RATCHET:** 72 tooth mechanism, for quick, accurate wrench operation, ensuring a take-up angle of no more than 5°. Ideal for right-hand tightening; torque accuracy:  $\pm 3\%$

**DOUBLE GRADUATION:** High scale visibility. Easy-to-select settings, with extremely accurate increments.

**BI-MATERIAL HANDLE:** Ergonomic handle, for a safe, comfortable hold. Made from materials resistant to fuel, oil and industrial liquids.

**TORQUE LOCKING PUSH-PULL SYSTEM:** Lock/release knob with high-visibility red ring in released position. Torque is set by rotating the handle.

**CLICK MECHANISM:** The mechanical click can be heard and touched.

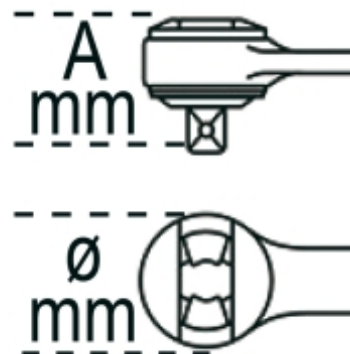

Art.	art.	Nm	■	D mm	A mm	L mm	g	mm
006660702	666/2	5÷25	1/4	26	25	273	395	0,05
006660703	666/2X	5÷25	3/8	26	29	273	405	0,05
006660705	666/5	10÷50	3/8	30	33	342	680	0,25
006660710	666/10	20÷100	3/8	30	33	385	760	0,25
006660711	666/10X	20÷100	1/2	30	37	385	770	0,25
006660720	666/20	40÷200	1/2	42	43	471	1020	0,5
006660730	666/30	60÷300	1/2	42	43	600	1270	1,0