



UNI EN ISO 6789

The wrench that does not require releasing tension after use. 100% Italian-made, it is ideal for controlled tightening of screws/bolts.

**ZERO-RESET TECHNOLOGY:** Based on higher-performance materials and improved heat treatment of both the spring and the component parts of the adjustment system, the wrench no longer requires releasing tension after use.

**EASY SETTINGS:** The graduated vernier scale allows minimum interval fractions to be set up (in tenths of Nm).

**IMPROVED VISIBILITY:** Double graduation in Nm for clearer, simpler torque visibility.

**100% ITALIAN-MADE:** Entirely designed and manufactured in Italy, assembled, tested and certified at Beta's Dynalab, at our headquarters in Sovico, which translates into top-quality torque wrenches.

**WIDE RANGE:** The range comprising 7 wrenches allows tightening from 5 Nm to 300 Nm, with 1/4" to 1/2" male square drives.



**REVERSIBLE RATCHET:** 72 tooth mechanism, for quick, accurate wrench operation, ensuring a take-up angle of no more than 5°. Ideal for right-hand tightening; torque accuracy:  $\pm 3\%$

**DOUBLE GRADUATION:** High scale visibility. Easy-to-select settings, with extremely accurate increments.

**BI-MATERIAL HANDLE:** Ergonomic handle, for a safe, comfortable hold. Made from materials resistant to fuel, oil and industrial liquids.

**TORQUE LOCKING PUSH-PULL SYSTEM:** Lock/release knob with high-visibility red ring in released position. Torque is set by rotating the handle.

**CLICK MECHANISM:** The mechanical click can be heard and touched.

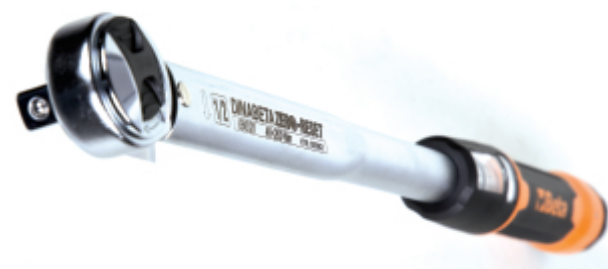

	Beta	art.
	006660702	666/2
	006660703	666/2X
	006660705	666/5
	006660710	666/10
	006660711	666/10X
	006660720	666/20
	006660730	666/30