

8026R-K
**Straight shackles with screw collar pin, high-tensile alloy steel, GRADE 6,
hot-dipped galvanized body**
EN 13889
TECHNICAL DATA


- minimum safety factor: 6
- heat treatment: hardening and tempering
- traceability code on both pin and body


LABORATORY TESTS

- chemical analysis
- metallographic analysis
- tensile test
- fatigue test (min. 20,000 cycles)
- proof load test (2 x WLL)

AVAILABLE CERTIFICATES

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2
- Inspection Certificate UNI EN10204 type 3.1
- CE Declaration of Conformity

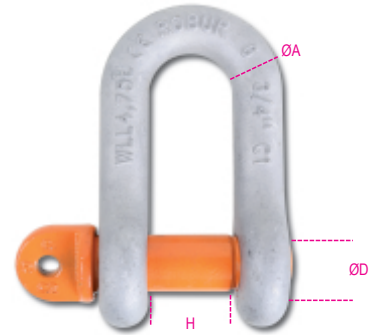

	art.	ØD mm	ØD mm (")	H mm	WLL kg	
080269212	8026R-K 12	16	16	21	2000	1
080269216	8026R-K 16	19	19	27	3250	1