

8029R-K
Bow shackles with screw collar pins, high-tensile alloy steel, GRADE 6, hot-dipped galvanized body
TECHNICAL DATA


- minimum safety factor: 6
- heat treatment: hardening and tempering
- traceability code on pin and body


LABORATORY TESTS

- chemical analysis
- metallographic analysis
- tensile test
- fatigue test (min. 20,000 cycles)
- proof load test (2 x WLL)

AVAILABLE CERTIFICATES

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2
- Inspection Certificate UNI EN10204 type 3.1
- CE Declaration of Conformity

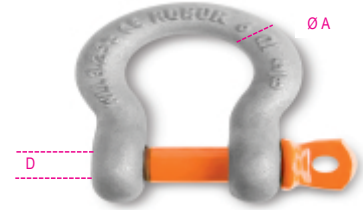

	art.	ØD mm	ØC mm	WLL kg	
080299106	8029R-K 6	8	20	500	1
080299108	8029R-K 8	10	22	750	1
080299110	8029R-K 10	11	26	1000	1
080299111	8029R-K 11	13	29	1500	1
080299112	8029R-K 12	16	33	2000	1
080299116	8029R-K 16	19	43	3250	1