

8031R-K
Harpssluitingen voor hef werkzaamheden, staal met hoge treksterkte, veiligheidsbout. Gegloeid en gegalvaniseerd.
EN 13889
TECHNICAL DATA


- minimum safety factor: 6
- heat treatment: hardening and tempering
- traceability code on pin and body


LABORATORY TESTS

- chemical analysis
- metallographic analysis
- tensile test
- fatigue test (min. 20,000 cycles)
- proof load test (2 x WLL)

AVAILABLE CERTIFICATES

- Technical Product Specifications
- Test Report UNI EN10204 type 2.2
- Inspection Certificate UNI EN10204 type 3.1
- CE Declaration of Conformity

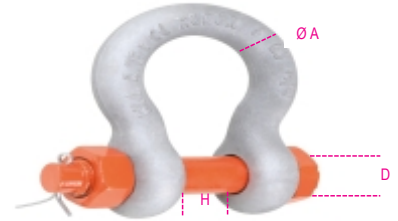

	art.	ØD mm	ØD mm (")	H mm	WLL kg	ØC mm	
080319112	8031R-K 12	16	16 (5/8)	21	2000	33	1
080319116	8031R-K 16	19	19 (3/4)	27	3250	43	1