


8153

eslingas para elevação de verde 2t fita de duas camadas, buracos reforçados, alta tenacidade de poliéster (PES)

CE

EN 1492-1

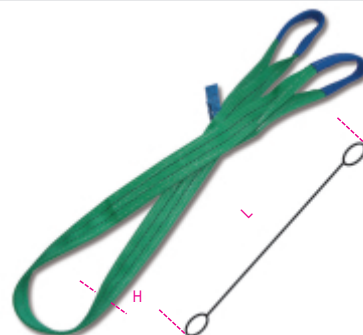

art.	art.			
081530010	8153 1-T2	1	60	2
081530015	8153 1,5-T2	1,5	60	2
081530020	8153 2-T2	2	60	2
081530025	8153 2,5-T2	2,5	60	2
081530035	8153 3,5-T2	3,5	60	2
081530030	8153 3-T2	3	60	2
081530040	8153 4-T2	4	60	2
081530050	8153 5-T2	5	60	2
081530060	8153 6-T2	6	60	2
081530080	8153 8-T2	8	60	2
081530100	8153 10-T2	10	60	2

				$\beta=0^{\circ}+45^{\circ}$	$\beta=45^{\circ}+60^{\circ}$
30	1t	0,8t	2t	1,4t	1t
60	2t	1,6t	4t	2,8t	2t
90	3t	2,4t	6t	4,2t	3t
120	4t	3,2t	8t	5,6t	4t
150	5t	4,0t	10t	7,0t	5t
180	6t	4,8t	12t	8,4t	6t
240	8t	6,4t	16t	11,2t	8t
300	10t	8,0t	20t	14,0t	10t