



8178

eslingas para elevação de 5t anel contínuo de fita, vermelho alta tenacidade de poliéster (PES)

CE

EN 1492-2

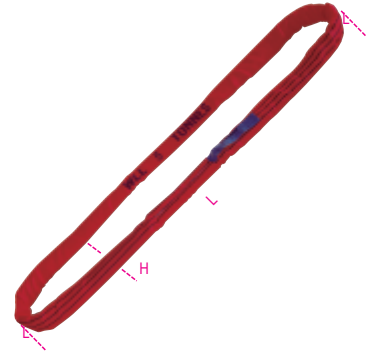

| art. | art. | | | |
|-----------|-------------|-----|---|----|
| 081780010 | 8178 0,5-T5 | 0,5 | 5 | 70 |
| 081780020 | 8178 1-T5 | 1 | 5 | 70 |
| 081780030 | 8178 1,5-T5 | 1,5 | 5 | 70 |
| 081780040 | 8178 2-T5 | 2 | 5 | 70 |
| 081780050 | 8178 2,5-T5 | 2,5 | 5 | 70 |
| 081780060 | 8178 3-T5 | 3 | 5 | 70 |
| 081780080 | 8178 4-T5 | 4 | 5 | 70 |
| 081780100 | 8178 5-T5 | 5 | 5 | 70 |
| 081780120 | 8178 6-T5 | 6 | 5 | 70 |
| 081780160 | 8178 8-T5 | 8 | 5 | 70 |

| | 11 | 0,8t | 2t | 1,4t |
|----|----|------|-----|------|
| 11 | 2t | 1,6t | 4t | 2,8t |
| 21 | 3t | 2,4t | 6t | 4,2t |
| 31 | 4t | 3,2t | 8t | 5,6t |
| 41 | 5t | 4,0t | 10t | 7,0t |