
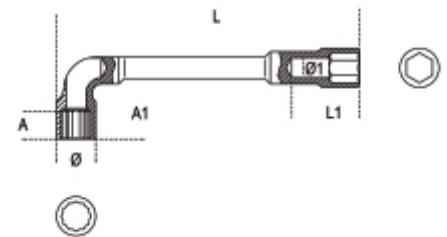


ISO 2236

- Kan worden gebruikt met een bedieningsstang die in het gat wordt gestoken.
- Het gat aan de korte kant maakt toegang tot de moer mogelijk, zelfs met uitstekende schroefdraad.

Art.	M mm	M1 mm	L mm	L1 mm	Ø mm	Ø1 mm	A mm	A1 mm	g
009370006	6	6	110	15	11,5	5	8	15	55
009370007	7	7	116	15	12,5	6	9	18	60
009370008	8	8	120	21	13	6	11	20	65
009370009	9	9	125	21	14	7	11	20	75
009370010	10	10	133	25	16,5	8	13	22	105
009370011	11	11	143	25	17,5	8,5	14	23	125
009370012	12	12	148	25	19	8,5	14	25	165
009370013	13	13	154	34	19,5	9,5	16	28	175
009370014	14	14	167	34	21,5	10	17	28	220
009370015	15	15	182	40	22,5	10	17	29	235
009370016	16	16	193	40	24,5	11	20	33	335
009370017	17	17	198	44	26	12	20	34	340
009370018	18	18	215	44	26,5	13	20	34	370
009370019	19	19	220	48	29	14	22	35	435
009370020	20	20	222	48	30,5	14	22	37	485
009370021	21	21	236	48	30,5	16	25	39	575
009370022	22	22	250	52	32,5	16	25	41	610
009370023	23	23	256	52	33,5	17	26	44	705
009370024	24	24	272	55	35	19	27	46	805
009370025	25	25	282	55	36,5	19	27	47	895
009370026	26	26	296	61	37,5	20	28	47	950
009370027	27	27	296	61	39	21	28	50	1220
009370028	28	28	314	61	39	22	28	51	1235
009370030	30	30	348	70	42,5	23	31	51	1520



Scan de QR-code om toegang te krijgen tot het
Specificaties, media en documentatie in één klik.

