
	Art.	L mm	L1 mm	Ø min+max mm	Wt g
009660812	966BA/V60	370	36	125+250	730
009660814	966BA/V80	430	48	250+400	1520



Wanneer gebruikt in een explosieve omgeving kan deze sleutel tot ontsteking of explosie van de omgeving of van de apparatuur die te bedienen is leiden.
 Quando usato in un'area a rischio esplosione, questa chiave può scatenare un'esplosione o un'incendio.
 Cuando se utiliza en un área de riesgo de explosión, esta llave puede provocar una explosión o un incendio.
 This sparkproof tool cannot be used in areas with explosive or flammable gas atmospheres.
 This tool may not be used in the presence of any explosive, flammable or any ignited vapours.



Scan de QR-code om toegang te krijgen tot het
 Specificaties, media en documentatie in één klik.

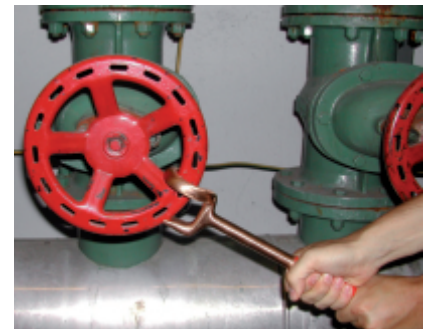